

FORM PTO-1390  
 (REV. 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES  
 DESIGNATED/ELECTED OFFICE (DO/EO/US)  
 CONCERNING A FILING UNDER 35 U.S.C. 371**

5077-000050

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

**09/869664**

INTERNATIONAL APPLICATION NO.

INTERNATIONAL FILING DATE

PRIORITY DATE CLAIMED

PCT/JP00/07609

27 October 2000 (27.10.00)

01 November 1999 (1.11.99)

TITLE OF INVENTION INFORMATION TRANSMISSION METHOD

APPLICANT(S) FOR DO/EO/US SATO, Junichi; YAMAGUCHI, Takao; ITOH, Tomoaki and ARAKAWA, Hiroshi

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.
4. ☐ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
  - b. ☒ has been communicated by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
  - a. ☒ is attached hereto. 87 pages
  - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

**Items 11 to 20 below concern document(s) or information included:**

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A **FIRST** preliminary amendment.
14. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
20. ☒ Other items or information:

Application Data Sheet, 44 sheets of formal drawings (Figs. 1 - 51), PTO Form 1449 with copies of references cited thereon (1 US, 3 JP, 6 other), English translation of International Search Report and return postcard.

U.S. APPLICATION NO. <b>09/869664</b> (if known, see 37 CFR 1.53)		INTERNATIONAL APPLICATION NO. <b>PCT/JP00/07609</b>		ATTORNEY'S DOCKET NUMBER <b>5077-000050</b>	
<b>21. <input checked="" type="checkbox"/> The following fees are submitted:</b> <b>BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)):</b> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a) (2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... <b>\$1000.00</b>  International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... <b>\$860.00</b>  International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... <b>\$710.00</b>  International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... <b>\$690.00</b>  International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) ..... <b>\$100.00</b>  <b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				<b>CALCULATIONS PTO USE ONLY</b>	
Surcharge of <b>\$130.00</b> for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$ 860.00	
CLAIMS				\$ 0.00	
Total claims				\$	
Independent claims				\$	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)				\$	
<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$ 1,058.00	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$ 0.00	
<b>SUBTOTAL =</b>				\$ 1,058.00	
Processing fee of <b>\$130.00</b> for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$ 0.00	
<b>TOTAL NATIONAL FEE =</b>				\$ 1,058.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). <b>\$40.00</b> per property +				\$ 40.00	
<b>TOTAL FEES ENCLOSED =</b>				\$ 1,098.00	
				Amount to be refunded:	
				charged:	
a. <input checked="" type="checkbox"/> A check in the amount of \$ <u>1,098.00</u> to cover the above fees is enclosed.					
b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.					
c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>08-0750</u> . A duplicate copy of this sheet is enclosed.					
d. <input type="checkbox"/> Fees are to be charged to a credit card. <b>WARNING:</b> Information on this form may become public. <b>Credit card information should not be included on this form.</b> Provide credit card information and authorization on PTO-2038.					
<b>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.</b>					
SEND ALL CORRESPONDENCE TO:  Gregory A. Stobbs Harness, Dickey & Pierce, P.L.C. P. O. Box 828 Bloomfield Hills, MI 48303 United States of America					
SIGNATURE <u>Gregory Stobbs</u>  Gregory A. Stobbs NAME  <u>28,764</u> REGISTRATION NUMBER  Date: June 28, 2001					

44/PRIS

09/869664

JC18 Rec'd PCT/PTO 2 8 JUN 2001

## SPECIFICATION

### INFORMATION TRANSMISSION METHOD

#### TECHNICAL FIELD

The present invention relates to an information  
5 transmission method which makes use of a communication  
network.

#### BACKGROUND ART

In the context of the Internet, as the  
10 techniques for transmitting audio and video streams without  
interruption, conventionally developed is a bandwidth control  
technique (e.g., S. Floyd et al., "Link-sharing and Resource  
Management Models for Packet Networks", IEEE/ACM Trans. on  
Networking, Vol. 3, No. 4, pp. 365-386, Aug. 1995). Also  
15 developed as a technique for implementing a high-speed  
acquirement of Web documents is a caching technique (e.g., L.  
Rizzo et al., "Replacement Policies for a Proxy Cache",  
IEEE/ACM Trans. On Networking, Vol. 8, No. 2, pp. 158-170,  
Apr. 2000.). Even with these techniques, a plurality of  
20 terminals, which share transmission bandwidth on the Internet,  
have encountered a problem of deterioration in transmission  
quality caused by the occurrence of congestion in the network.

In order to implement comfortable access to outside  
home by sharing a transmission bandwidth among a plurality of  
25 terminals for home use, such a technique is required of a

09869664-062801

repeater, typified by a gateway, that can make use of bandwidth in an efficient manner. Gateways interconnect transmission paths having different transmission bandwidths, thus developing a gap in transmission bandwidth. Suppose a narrower bandwidth is available to the transmission path for use outside home than to the transmission path for home use. In this case, since the bandwidth that can be used at home is restricted to a narrower transmission bandwidth, it is difficult to use an application that makes use of the transmission path of a wider bandwidth for home use.

#### SUMMARY OF THE INVENTION

The present invention was developed to solve the aforementioned problems. It is an object of the present invention to combine the bandwidth control technique with the caching technique in harmony, thereby making it possible to use allocated bandwidths in an efficient manner.

To solve the aforementioned problems, an information transmission method according to the present invention comprises the step of monitoring a transmission bandwidth for transmitting data to and receiving data from a transmitter terminal and a transmission bandwidth for transmitting data to and receiving data from a receiver terminal. The method also comprises the steps of determining a procedure of requesting for data with a request from the receiver terminal



for transmission being employed as input, and controlling methods for using a cache and for transferring data in accordance with bandwidth information of said transmitter and receiver terminals and said request for data.

5

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

**Fig. 1A** is a view illustrating the configuration of a network according to a first embodiment of the present invention;

10 **Fig. 1B** is an explanatory view illustrating a bandwidth gap that occurs in the home gateway of **Fig. 1A**;

**Fig. 2A** is an explanatory view illustrating an information transmission method according to an embodiment of the present invention;

15 **Fig. 2B** is an explanatory view illustrating an information transmission method according to another embodiment of the present invention;

**Fig. 3** is an explanatory view illustrating a TV broadcast in which Web documents appear operatively associated therewith;

20 **Fig. 4** is an explanatory view illustrating the configuration of an information transmission system according to the present invention;

**Fig. 5A** is an explanatory view illustrating a bandwidth management according to an embodiment;

25

Fig. 5B is an explanatory view illustrating a bandwidth management according to another embodiment;

Fig. 6 is an explanatory view illustrating a method for implementing the bandwidth management using DiffServ;

5 Fig. 7 is an explanatory view illustrating data management;

Fig. 8 is an explanatory view illustrating a method for controlling the data management;

10 Fig. 9 is an explanatory view illustrating an operation of a TV broadcast in which Web documents appear operatively associated therewith;

Fig. 10 is an explanatory view illustrating a terminal that is itself provided with the same function as that of the information transmission system of Fig. 4;

15 Fig. 11 is an explanatory view illustrating another operation of a TV broadcast in which Web documents appear operatively associated therewith;

20 Fig. 12 is an explanatory view illustrating a gateway according to the present invention, applied to a gateway for use in a vehicle;

Fig. 13 is an explanatory view illustrating the configuration of a system for implementing the gateway for use in a vehicle;

25 Fig. 14 is an explanatory view illustrating an operation for playing back a Web document and an AV stream

simultaneously by operatively associating the position and direction therewith;

Fig. 15 is an explanatory view illustrating a terminal that is itself provided with the same function as that of the information transmission system of Fig. 13;

Fig. 16 is an explanatory view illustrating another operation for the simultaneous reproduction of a Web document and an AV stream by operatively associating the position and direction therewith;

Fig. 17 is an explanatory view illustrating a method for controlling the requests for a Web document and for the transmission of an AV stream, which occur independently of each other;

Fig. 18 is an explanatory view illustrating a method for controlling the transmission of contents for a look-ahead;

Fig. 19 is an explanatory view illustrating a method for receiving live video and audio to constitute a mirror server;

Fig. 20 is an explanatory view illustrating a method for constituting a mirror server in accordance with a user request;

Fig. 21 is an explanatory view illustrating a system configuration for implementing a mirror server using a gateway according to the present invention;

Fig. 22 is an explanatory view illustrating a specific example for constituting a mirror server using a gateway according to the present invention;

Fig. 23 is an explanatory view illustrating a method  
5 for preparing the summary of distributed databases;

Fig. 24 is a view illustrating the network configuration of second to eleventh embodiments according to the present invention;

Fig. 25 is a flowchart showing a second embodiment  
10 according to the present invention;

Fig. 26 is a view illustrating an example of a description of supplementary information;

Fig. 27 is a flowchart showing a third embodiment according to the present invention;

Fig. 28 is a view illustrating an example of a  
15 description of supplementary information;

Fig. 29 is a view illustrating an example of a description of supplementary information according to a fourth embodiment of the present invention;

Fig. 30 is a flowchart showing a fifth embodiment  
20 according to the present invention;

Fig. 31 is a view illustrating an example of a description of supplementary information;

Fig. 32 is an explanatory view illustrating time  
25 constraints;

Fig. 33 is a view illustrating an example of a description of supplementary information;

Fig. 34 is a flowchart showing a sixth embodiment according to the present invention;

5 Fig. 35 is a view illustrating an example of a description of supplementary information according to a seventh embodiment of the present invention;

Fig. 36 is a view illustrating an example of displaying supplementary information;

10 Fig. 37 is a view illustrating a network configuration according to an eighth embodiment of the present invention;

Fig. 38 is a view illustrating an example of a description for checking for the presence of contents;

15 Fig. 39 is a view illustrating a network configuration according to a ninth embodiment of the present invention;

Fig. 40 is a view illustrating a system configuration according to a tenth embodiment of the present invention;

Fig. 41 is a view illustrating a data format according to an eleventh embodiment of the present invention;

20 Fig. 42 is a view illustrating the data format according to the eleventh embodiment;

Fig. 43 is a view illustrating the data format according to the eleventh embodiment;

25 Fig. 44 is a view illustrating a network configuration according to a twelfth embodiment of the present invention;

Fig. 45A is an explanatory view illustrating an information transmission according to an embodiment of the present invention;

Fig. 45B is an explanatory view illustrating an information transmission according to another embodiment of the present invention;

Fig. 46 is an explanatory view illustrating a method for describing the location of and conditions for acquiring information;

Fig. 47 is an explanatory view illustrating the configuration of a transmitter and receiver terminal;

Fig. 48 is an explanatory view illustrating a method for using a mobile terminal;

Fig. 49 is an explanatory view illustrating a message control terminal for composing and decomposing messages;

Fig. 50 is an explanatory view illustrating an example of using the message control terminal for composing and decomposing messages; and

Fig. 51 is an explanatory view illustrating a method for updating information according to a thirteenth embodiment of the present invention.

#### BEST MODE FOR CARRYING OUT THE INVENTION

Now, the embodiments of the present invention will be explained below with reference to the accompanying drawings.

[Embodiment 1]

09869664-06204  
T.0220-4-06204

A system and method for transmitting information according to the first embodiment of the present invention will be explained. In the present invention, "contents" 5 refer to multi-medium information such as video, audio, and text data. In addition, a Web document can contain multi-medium information such as moving pictures, audio, and music. Incidentally, in the present invention, the "home gateway", "gateway", "information acquirement repeater", and "repeater" 10 express the same meaning and function, unless otherwise specified.

In the Internet, the WWW (World Wide Web) has started providing a service of transmitting streams such as moving pictures and audio in addition to conventional Web documents.

15 In order to guarantee the quality of both Web document and stream, this requires to control their quality in accordance with their respective property. For Web documents, a proxy server is provided with a cache for preventing the same document from being accessed a plurality of times, thereby 20 reducing the access time. In order to increase the hit rate of a plurality of accesses in the cache, studies have been made on how to select an unnecessary document to be deleted. In addition, such a software product has made its appearance that looks ahead the link contained in the page being 25 displayed, with a cache being provided in a user terminal, to

thereby shorten the access time sensed by the user. Attempts have been made to provide the proxy server with this look-ahead function. On the other hand, for streams, it is necessary to maintain their real time property. This requires control of bandwidth for preventing dropouts or delays of stream information. WFQ (Weighted Fair Queuing) is employed to ensure the fairness between the stream transmitted using UDP (User Datagram Protocol) and the Web document transmitted using TCP (Transmission Control Protocol), while CBQ (Class-Based Queuing) is employed for control in accordance with transmission rates. The WFQ and CBQ are detailed in "An Engineering Approach to Computer Networking", S. Keshav, pp.238-248, Addison Wesley, 1997, and in the aforementioned paper by S. Floyd et al., respectively.

In the present invention, a method is described first which integrates the bandwidth control technique and the caching technique to thereby make use of transmission bandwidths and storage media in an efficient manner.

**Figs. 1A and 1B** are explanatory views illustrating a home gateway. Suppose a plurality of terminals are connected to the Internet at home. In this case, it is necessary to provide a home gateway to share the bandwidth of an external link among the home terminals. Nowadays, an increased number of broad-bandwidth links are available such as CATV (Cable Television) or FTTH (Fiber To The Home) for external



connection. **Fig. 1A** illustrates examples of a broadcast using a satellite (artificial satellite) and ADSL (Asymmetrical Digital Subscriber Line) in addition to CATV. On the other hand, it is predicted that wireless communications of somewhat narrower bandwidth such as BlueTooth will be increasingly employed at home. Such a case is also conceivable in which contents of the home gateway is accessed by a mobile terminal via W-CDMA (Wideband Code Division Multiple Access). In such a case, the contents of a Web document or a stream would flow through a broad-bandwidth link into a narrow-bandwidth link via the home gateway. A gap between such bandwidths would cause a bandwidth to occur which cannot be effectively used since, among other things, the communication rate of the Web document is determined by the narrower bandwidth.

**Figs. 2A and 2B** are explanatory views illustrating an information transmission method according to the present invention. The present invention provides a gateway with a bandwidth control function and a cache control function. For streams, the bandwidth control is carried out to protect the bandwidth of a stream. In the case of a narrow-bandwidth available for external link and a broad-bandwidth for use at home, the acquirement of contents is reserved in the gateway, which in turn acquires a Web document according to the traffic of the external link and stores the document in a

cache area. Since the home user references the Web document only after it has been acquired, the user will not be bothered with the wait time for the transmission of the contents. Incidentally, for a broad-bandwidth available for use at home, it is not always necessary to protect a stream from outside home. As an example, bandwidth needs to be guaranteed for a gateway provided with a video server function that requires a broad-bandwidth for transmission. With the video server function and even with a broad-bandwidth available for use at home, a shortage in bandwidth may cause a conflict with a stream from outside home for bandwidth. Incidentally, bandwidth control is necessary for transmission from inside to outside home since a narrower bandwidth is available outside home. A videophone is an example which provides data to be transmitted to outside home and for which bandwidth control is carried out. On the other hand, suppose a conflict occurs on the input side of the home gateway for bandwidth. In this case, the size such as of a TCP window can be changed to reduce the amount of transmission of TCP, thereby making it possible to prevent a degradation in transmission quality of other transmissions (e.g., media) (Fig. 2A). On the contrary, suppose only a small amount of excess bandwidth is available for the home side provided with a narrow bandwidth. In this case, the cache control is effected to accumulate Web documents in the

gateway (The documents may be looked ahead to implement a high-speed access to the Web documents or may be read in parallel to acquire information at high speeds. The order and amount of information to be acquired (parallelism of acquisition) are controlled in accordance with the inflow rate of the information, thereby making it possible for the terminal to acquire the information at high speeds without being affected by the load at the server side (such as a network or devices)). At this time, since the transmission rate of acquiring the Web document is not affected by the narrow-bandwidth for use at home, full use can be made of the bandwidth of the external link. Inside home where the narrow-bandwidth is available, the Web document is transmitted in the excess narrow bandwidth or in an excess wider bandwidth that is available after the streams have been transmitted. Since the transmission bandwidth of data link becomes narrower inside home, the bandwidth control may be required depending on on-going traffic. For example, take an example where a stream and a Web document are transmitted at the same time (**Fig. 2B**). The status of **Fig. 2A** and **2B** is not static but may be changed by the home gateway in response to the number of terminals connected inside home and the type of data link. Both statuses can be determined in accordance with the flow rate of the traffic to inside home and the transmission bandwidth of data link in which transmissions

are directed toward the terminals available inside home. Incidentally, since the Web document is automatically stored in the cache area, those contents that can be readily read repeatedly and more frequently used are stored therein on a  
5 priority basis. As described above, the bandwidth control is required in general for transmission of contents from a broad-bandwidth data link to a narrow-bandwidth one.

**Fig. 3** is an explanatory view illustrating a TV broadcast in which a Web document appears operatively  
10 associated therewith. A technique according to the present invention is explained in accordance with an example of a TV broadcast in which the address of a Web document (Uniform Resource Locator: URL) is described, which is related to a broadcast program, as an information distribution service  
15 using the Internet. This service allows audio and video to be played back as in a TV broadcast and a Web document to automatically appear in phase with the progress of the program. In order to implement this service, it is necessary to display a Web document at the same time as the TV  
20 broadcast on a plurality of home terminals. This may be difficult from the viewpoints of the load of a Web server on the broadcast side and the provision of bandwidth at the home gateway. A method for solving this problem will be explained with reference to **Fig.4** and the subsequent figures.  
25 Incidentally, the TV broadcast itself (an AV stream) may be

transmitted as a satellite broadcast and a Web document may be acquired using a communication line in accordance with the link information provided for the TV broadcast. The BS digital broadcast delivers related information at the same  
5 time with the satellite broadcast. The technique according to the present invention allows the related information to be acquired on the Internet to thereby provide the following usages and effects:

(1) As the related information, use can be made of Web  
10 sites on the Internet to thereby employ the information as usual Internet contents.

(2) Introduction of Web sites related to the broadcast.

(3) Use can be made of information on remote areas such as overseas and on local areas at less cost, time, and effort.

15 With the effects mentioned above, Web documents and broadcast programs can be separately prepared, thereby facilitating correction and update of Web documents and allowing user opinions to be reflected readily. The related information can be used for various applications such as music and  
20 education.

Fig. 4 is an explanatory view illustrating the configuration of an information transmission system according to the present invention. The information transmission system (gateway) 100 of Fig. 4 is interposed between at least  
25 one transmitter terminal 101 and at least one receiver

terminal 102. For example, the transmitter terminal 101 may be connected to the information transmission system 100 via a telephone line or an optical fiber or may be a source for supplying a digital broadcast to the information transmission system 100. For example, the receiver terminal 102 may be connected to the information transmission system 100 via a wireless LAN or wired LAN. The information transmission system 100 comprises a transmitter terminal communication interface 103, a receiver terminal communication interface 104, a receiver terminal bandwidth monitor portion 105, and a transmitter terminal bandwidth monitor portion 106. The information transmission system 100 further comprises a receiver terminal bandwidth control portion 107, a transmitter terminal bandwidth control portion 108, a data management portion 109, a request management portion 110, a schedule management portion 111, a storage portion (cache) 112, a capacity monitor portion 113, a transfer control portion 114, and a data interpreter portion 115. Incidentally, a "transmission condition" to appear in the following explanations means the supplementary information of contents, being indicative of a time constraint, communication rate, information on the priority of contents (data), the number of colors and size of the receiver terminal 102, and so on.

The transmitter terminal communication interface 103

transmits a request, in the bandwidth that is controlled by the transmitter terminal bandwidth control portion 108, to the transmitter terminal 101 for transmission of data. The transmitter terminal communication interface 103 also  
5 receives data from the transmitter terminal 101. In some cases, the transmitter terminal communication interface 103 receives a data transmission condition from the transmitter terminal 101.

The receiver terminal communication interface 104  
10 receives a request from the receiver terminal 102 for transmission of data. In some cases, the receiver terminal communication interface 104 also receives a data transmission condition from the receiver terminal 102. On the other hand, the receiver terminal communication interface 104 transmits  
15 data to the receiver terminal 102 in the bandwidth controlled by the receiver terminal bandwidth control portion 107.

The receiver terminal bandwidth monitor portion 105 monitors the transmission bandwidth of the receiver terminal communication interface 104. The transmitter terminal  
20 bandwidth monitor portion 106 monitors the transmission bandwidth of the transmitter terminal communication interface 103. The receiver terminal bandwidth control portion 107 manages and controls the transmission bandwidth of the receiver terminal communication interface 104. The  
25 transmitter terminal bandwidth control portion 108 manages

and controls the transmission bandwidth of the transmitter terminal communication interface 103.

0865664 062304  
108290 4966860

The data management portion 109 receives data inputted from the transmitter terminal communication interface 103 or  
5 acquires data specified by the transfer control portion 114 from the storage portion 112. The data management portion 109 selects at least one of storing the data in the storage portion 112, transferring the data to the transfer control portion 114, or dropping the data, and at the same time sends  
10 information on bandwidth control to the receiver terminal bandwidth control portion 107 and information on transfer control to the transfer control portion 114. This is carried out in accordance with at least one of a transmission condition inputted at the transmitter terminal communication  
15 interface 103 and sent from the transmitter terminal 101, a transmission condition inputted at the transfer control portion 114 and sent from the receiver terminal 102, information on the receiver terminal bandwidth monitored by the receiver terminal bandwidth monitor portion 105,  
20 information on transmitter terminal bandwidth monitored by the transmitter terminal bandwidth monitor portion 106, and information on the storage capacity of the storage portion 112 monitored by the capacity monitor portion 113. In some cases, based on both the specification of data and the  
25 transmission condition from the transfer control portion 114,



(converted) data is acquired from the storage portion 112.  
In some other cases, (converted) data from the transfer  
control portion 114 is stored in the storage portion 112.

In response to the request received by the receiver  
5 terminal communication interface 104 from the receiver  
terminal 102, the request management portion 110 outputs an  
inquiry of the presence or absence of data to the transfer  
control portion 114 in conjunction with the transmission  
condition to allow the transfer control portion 114 to send  
10 the stored data in accordance with the transmission condition.  
If the stored data is not available, the request management  
portion 110 sends the bandwidth control information to the  
transmitter terminal bandwidth control portion 108 as well as  
determines a request procedure. This is carried out in  
15 accordance with at least one of the type of data to be  
requested, the transmission condition acquired from the  
transfer control portion 114 and sent from the transmitter  
terminal 101, the transmission condition of the information  
transmission system 100 acquired from the transfer control  
20 portion 114, and information on bandwidth of the transmitter  
terminal monitored by the transmitter terminal bandwidth  
monitor portion 106. Then, the request management portion  
110 allows the transmitter terminal communication interface  
103 to transmit a request to the transmitter terminal 101,  
25 outputs a request to the schedule management portion 111 in

conjunction with the schedule for transmitting the request,  
or allows the schedule management portion 111 to output the  
request that has been held therein. In some cases, the  
request management portion 110 makes an inquiry to the  
5 transfer control portion 114 on whether data has been  
transmitted in response to the request. Then, depending on  
the result, the request management portion 110 may allow the  
schedule management portion 111 to output the request held  
therein.

10 The schedule management portion 111 makes the request,  
to the transmitter terminal communication interface 103,  
specified by the request management portion 110 at the time  
or timing specified by the request management portion 110.  
In some cases, based on the determination of the condition by  
15 the request management portion 110, the request management  
portion 110 outputs the request held by the schedule  
management portion 111 irrespective of the time specified.

The storage portion 112 stores data. The capacity  
monitor portion 113 monitors the storage capacity of the  
20 storage portion 112.

In response to a request from the request management  
portion 110, the transfer control portion 114 acquires the  
requested data from the data management portion 109. In  
accordance with the transmission condition from the request  
25 management portion 110 or the data management portion 109,

the transfer control portion 114 acquires and processes data from the data management portion 109 as necessary to transmit the resulting data from the receiver terminal communication interface 104 to the receiver terminal 102. The processing  
5 includes conversion, selection (if data is to be selected), and addition of a message or a transmission condition. The message includes that the data has been acquired or cannot be transmitted, the address of the data (which may be the address of the transmitter terminal 101 or the information  
10 transmission system 100), and the status of data accumulation (such as the frequency of access). In some cases, the transfer control portion 114 outputs the processed (converted) data to the data management portion 109 and store the data therein. Suppose a transmission condition is  
15 attached to the data. In this case, the transfer control portion 114 may rewrite the transmission condition to transmit the resulting transmission condition from the receiver terminal communication interface 104 to the receiver terminal 102 in some other cases according to the  
20 circumstances (e.g., by subtracting the time actually consumed from the specified time constraint). In some cases, the transfer control portion 114 may set and output a new transmission condition by itself (irrespective of the presence or absence of a transmission condition). In some  
25 other cases, the transfer control portion 114 may acquire the

access information of the data from the data management portion 109 in conjunction with the requested data. Still in some other cases, the transfer control portion 114 may acquire, from the data management portion 109, the transmission condition received from the transmitter terminal 101, outputting the transmission condition to the request management portion 110.

The data interpreter portion 115 interprets the description of the data, acquired by the data management portion 109, to extract the data address which will be conceivably requested next and determines the order of requests in accordance with the transmission condition (including the result of bandwidth monitoring), and then makes a request for data to the request management portion 110. For example, the transfer control portion 114 first requests document data and then acquires the document data, thereafter requesting a video stream that requires an excess bandwidth.

Incidentally, the request management portion 110 determines the contents to be acquired (e.g., extracts the upper-class access sites from the past log of the user). Alternatively, when a plurality of data links for acquiring information are available (e.g., one link is via a satellite and the other is via a CATV), the destination data link can be determined based on the average transmission speed

provided upon acquirement of data in the past, TTL (Time To Live), and the value of propagation delays.

**Figs. 5A and 5B** are explanatory views illustrating the management of bandwidth. There are two methods conceivable for allocating transmission bandwidth. As shown in **Fig. 5A**, one is a method for defining the service bandwidth of UDP for each terminal or user and the service bandwidth of TCP to be shared by one or more terminals or users in order to manage the transmission bandwidth. As shown in **Fig. 5B**, the other is a method for defining the service bandwidth of UDP and TCP for each terminal or user in order to manage the transmission bandwidth. An existing queuing algorithm (e.g., CBQ) can be used to allocate bandwidth, thereby making it possible to implement both methods. The bandwidth allocation method includes one for allocating bandwidth in advance at a gateway to the terminals, which are expectedly connected thereto, and the other for allocating or de-allocating bandwidth dynamically between a terminal and the gateway. In either case, bandwidth can be allocated in such a way as to restrict the bandwidth for a transmission from the cache to a terminal (which is considered effective particularly when a narrow bandwidth is employed as shown in **Fig. 2B**). On the other hand, priorities can be defined for each bandwidth defined. For example, suppose the cache is given a lower class priority and therefore a wider bandwidth is required for

transmissions using UDP. In this case, it is possible to prevent transmissions by the cache but give a higher priority to transmissions using UDP.

**Fig.6** is an explanatory view illustrating a method for implementing bandwidth management using DiffServ. The DiffServ is a method for dropping a packet at the time of congestion in accordance with the priority given to an IP (Internet Protocol) packet at a router or a gateway (See S. Blake et al., "An Architecture for Differentiated Services", RFC 2475, Internet Engineering Taskforce, Dec., 1998). The DiffServ has four service classes (AF) and a class (EF) that does not allow for packet drops. In each of the former classes, it is possible to implement three levels of packet drop according to their priorities. In the example of **Fig. 6**, a game or audio application, which is seriously affected by delays or packet drops, is allocated to class EF. Class AF allocates a class to each application (e.g., class A is allocated to a moving picture). In addition, the three levels of packet drop are associated with terminals or users. For example, processing is performed in such a way that less packet drops are provided for a user who desires a high-quality service. Incidentally, the class of the cache can be defined as shown in **Fig. 6**.

**Fig. 7** is an explanatory view illustrating data management. There are two methods available for managing a

storage medium that constitutes the cache. One method is to provide the data management portion 109 with the load management rule that provides a method for accumulating information to reduce the transmission bandwidth used for acquiring information upon acquirement of information. The load management rule manages the acquired information in a storage medium of limited capacity (e.g., a hard disc or SD). The management is carried out according to a determination of the most recent reference time and size of the acquired information, the effective information acquirement speed at which the information has been acquired (in practice, it takes a different length of time to acquire contents depending on the load on the server and the transmission bandwidth available), and the type of media (e.g., moving pictures, audio, or text data). The other method is to provide the data management portion 109 with the information freshness management rule that provides an information accumulation method that improves the freshness of accumulated information upon acquirement of information. The information freshness management rule conducts an automatic acquirement of information in accordance with the most recent recording time and the number of times of reference of the acquired information (an automatic update of accumulated contents).

**Fig. 8** is an explanatory view illustrating a method for

controlling data management. The data management portion 109 changes the rule to be employed in response to the transmission bandwidth on the input side (available for use at home). The data management portion 109 also measures the bandwidth of the input side, and manages the information to be accumulated as appropriate, using the load management rule or the information freshness management rule, in accordance with defaults (e.g., the difference in usable bandwidth between the input and output sides, the usable bandwidth of the input side, the bandwidth, the number of connected terminals, and the time period available on the input side). For example, the load management rule is applied when a narrow bandwidth is available on the input side (Fig. 2A), whereas the information freshness management rule is applied when a broad bandwidth is available (Fig. 2B). Incidentally, the aforementioned example shows two algorithms for updating data, however, a single method may be employed. For example, only such information that has been referenced many times during the past one week is to be recorded and other information is to be deleted. In this case, the information that has been referenced earlier is deleted on a priority basis (the same method as this can be applied to a mirror server to be described later with reference to Fig. 19 and the subsequent figures).

Fig. 9 is an explanatory view illustrating the



operation of a TV broadcast in which a Web document appears  
operatively associated therewith. Program information (e.g.,  
program names, performers, broadcast time, and channels) and  
contents management information indicative of the location  
5 (such as of an URL) of program-related information are  
inputted. Then, the program-related information is  
automatically acquired and accumulated in advance on the  
input side (at the gateway or a terminal) before the program  
is started or in accordance with the progress of the program.  
10 Then, the information that has been acquired in advance by  
the receiver side is presented according to the program  
rating. The program-related information is automatically  
acquired in accordance with the availability of excess  
bandwidth and the effective transfer speed. In this example,  
15 bandwidth is reserved at the start of transmission of an AV  
stream and is released at the end of the transmission.  
Incidentally, the program that a user is going to watch can  
be specified by the user in advance or the program that the  
user may watch can be determined in accordance with the  
20 favorite programs the user watched in the past, whereby  
unnecessary related information has not to be acquired.  
Different media may be employed for storage in a manner such  
that the video and audio of a broadcast program, program  
information, and the location of program-related information  
25 are stored in tape media, whereas the actual body of the

program-related information is stored in a hard disc. This method makes it possible to implement even a satellite broadcast by combining telephone lines to thereby constitute the system. The transmission method can employ the multi-  
5 cast/broadcast or uni-cast.

**Fig. 10** is an explanatory view illustrating a terminal which is itself provided with the same function as that of the information transmission system (gateway) **100** of **Fig. 4**. In the information transmission system **100** of **Fig. 10**, the  
10 request management portion **110** receives a request for data and a transmission condition from a user request input portion **125**, and the transfer control portion **114** transfers the data to a display & play-back portion **126**. The transmitter terminal communication interface **103** is connected  
15 to a transmitter terminal repeater **127**.

**Fig. 11** is an explanatory view illustrating another operation of a TV broadcast in which a Web document appears operatively associated therewith. **Fig. 11** shows a series of operations in which while the user select a program to  
20 receive an AV stream in real time, a Web document is automatically acquired in accordance with the linked information which is provided to the stream and related to the program. This method can be employed when the transmission path and the server have a sufficiently high  
25 response speed. Take a television shopping program as an

example of specific description of a TV broadcast. In this case, a product presentation is provided in the AV stream, while information on the purchase application or detailed catalog information of products is presented in the Web document. In the case of a drama, the drama is broadcasted in the AV stream, while the performers or the brief outline of the drama are introduced in the Web document. In this case, a bandwidth may be allocated to broadcast the Web document and the AV stream.

**Fig. 12** is an explanatory view illustrating a gateway according to the present invention, applied to a gateway for use in a vehicle. The gateway according to the present invention, which is applied to a vehicle, allows a Web document to introduce maps or sightseeing guides for showing the sights of surrounding areas, and allows an AV stream related to the maps and the sightseeing guides to be played back at the same time. Incidentally, such an AV stream may be employed that is provided with pictures showing the level of traffic congestion on roads.

**Fig. 13** is an explanatory view illustrating the configuration of a system for implementing the gateway for use in a vehicle. The information transmission system **100** of **Fig. 13** is characterized by comprising a vehicle information management portion **135** for managing at least one or more pieces of information on the position of the vehicle, its

standstill status, its traveling direction, date and time, and user-defined information.

Fig. 14 is an explanatory view illustrating an operation for playing back a Web document and an AV stream simultaneously by operatively associating the position and traveling direction of the vehicle therewith. Inputted are program information based on the position information (e.g., longitudes and latitudes, genres, time periods of broadcast programs, charges) and contents management information indicative of the location of program-related information (e.g., an URL). Then, the program-related information is automatically acquired and accumulated in advance on the receiver side (the gateway or a terminal) before the program is started or in accordance with the progress of the program. Then, the information that has been acquired in advance on the receiver side is presented according to the program rating. The program-related information is automatically acquired in accordance with the current position of the vehicle, its traveling direction, the availability of excess bandwidth and the effective transfer speed. In this example, bandwidth is reserved at the start of transmission of the AV stream and is released at the end of the transmission. Incidentally, the program that a user is going to watch can be specified by the user in advance or the program that the user may watch can be determined in accordance with the

favorite programs the user watched in the past, whereby unnecessary related information has not to be acquired.

Fig. 15 is an explanatory view illustrating a terminal which is itself provided with the same function as that of the information transmission system (gateway) 100 of Fig. 13. In the information transmission system 100 of Fig. 15, the request management portion 110 receives a request for data and a transmission condition from the user request input portion 125, and the transfer control portion 114 transfers the data to the display & play-back portion 126. The transmitter terminal communication interface 103 is connected to the transmitter terminal repeater 127. The vehicle information management portion 135 manages at least one or more pieces of information on the position of the vehicle, its standstill status, its traveling direction, date and time, and user-defined information.

Fig. 16 is an explanatory view illustrating another operation for playing back a Web document and an AV stream simultaneously by operatively associating the position and traveling direction of the vehicle therewith. Fig. 16 shows a series of operations in which while the user selects a program to receive an AV stream in real time, a Web document is automatically acquired in accordance with the linked information which is provided to the stream and related to the program. This method can be employed when the

transmission path and the server have a sufficiently high response speed. The program-related information is automatically acquired in accordance with the current position of the vehicle and its traveling direction.

5       **Fig. 17** is an explanatory view illustrating a method for controlling the requests for a Web document and for the transmission of an AV stream, which occur independently of each other. Suppose a request for acquiring higher acquisition priority contents (e.g., an AV stream) has  
10 occurred at the time of acquiring lower acquisition priority contents (e.g., a Web document). In this case, depending on the transmission bandwidth available, the acquisition of the lower acquisition priority contents is interrupted to start acquiring the higher acquisition priority contents. Then,  
15 the acquisition of the lower acquisition priority contents is re-started after the higher acquisition priority contents have been acquired.

**Fig. 18** is an explanatory view illustrating a method for controlling the transmission of contents for a look-ahead.

20 The source of acquisition of lower acquisition priority contents (e.g., a Web document) is inputted (more specifically, which includes a bookmark defined by the user's browser, a direct instruction provided by the user, or an analysis of access log to the cache). Suppose a request for  
25 acquiring higher acquisition priority contents (e.g., an AV

stream) is being executed and much bandwidth is used for acquiring higher acquirement priority contents. In this case, the acquirement of the lower acquirement priority contents is executed after the higher acquirement priority contents have been acquired.

Fig. 19 is an explanatory view illustrating a method for receiving live video and audio to constitute a mirror server. In delivering video, audio, or a Web document to a number of receiver terminals, there is a problem of access load of the distributor side (server). In a usual case, the access load is distributed over a plurality of servers, which are prepared at each site (e.g., in Japan, U.S.A., or Europe) and provided with the same information. In general, the preparation of the servers that are provided with the same information is referred to as the mirroring of database. Consider a service of providing live video and audio, and a service for accumulating live video and audio for re-use (by providing a search key to call necessary video or audio). To implement these services in a simple manner, each server may individually receive and accumulate the live video and audio to be delivered. For a search key, another server may acquire the search key from the server to which the search key has been provided. Alternatively, the server to which the search key has been provided may transmit the search key to another server. This method can be implemented easily but

would make it difficult to effect the management or operation of an increased number of cameras or servers.

Fig. 20 is an explanatory view illustrating a method for constituting a mirror server in accordance with a user request. This method is a hierarchical cache method which has already been used for transmission of Web documents. At the time of occurrence of a user request, the server of the user searches an adjacent server for requested information. If the requested video and audio are not available there, the server of the user will search another adjacent server (a server of an upper or the same class) to find the requested information. This method with the hierarchical cache presents no problem in the actual body of the video and audio, and the search key. However, since each server is provided with a different database and thus the user has to know which server manages what kind of information, it is necessary to implement a summary or an index function in each server. Such a problem is also encountered that the response speed is reduced when the requested moving picture and audio are not available in an adjacent server.

Fig. 21 is an explanatory view illustrating a system configuration for implementing a mirror server. The information transmission system 100 of Fig. 21 is characterized by comprising a database management portion 146. The database management portion 146 comprises at least one of



the following portions. That is, the portions include a recording time management portion for managing the time of recording the information acquired and a reference time management portion for managing the time of referencing the information acquired. The portions also include a search key management portion for managing the search key provided to the information acquired (e.g., for managing the correspondence between the information acquired and the search key). The portions further include a copy status management portion for managing the status of copying the information acquired (e.g., for managing the number of times of reference or the timing for synchronizing databases).

Fig. 22 is an explanatory view illustrating a specific example for constituting a mirror server using a gateway according to the present invention. The present invention makes it possible to control transmission bandwidth and storage media operatively associated with each other. This allows a higher priority to be provided to the delivery transmission of live video and audio (bandwidth is allocated to the transmission on a priority basis) and mirroring to be performed in accordance with the availability of transmission bandwidth and effective transmission speed between servers. When much bandwidth is used for the transmission of live video and audio, the transfer of accumulated video and audio is interrupted, whereas a mirroring transfer is re-started

when the bandwidth to be used for the transmission of the live video and audio has reduced. Transmissions are not necessarily interrupted for mirroring. Instead, bandwidth control can be performed so as not to interrupt the live transmission.

Fig. 23 is an explanatory view illustrating a method for preparing the summary of distributed databases. The summary of the information acquired is composed of at least one of intra-coded information containing at least one or more frames of video, a GOP (Group of Pictures), and audio. Then, the summary is copied to and held in two or more of the aforementioned information transmission systems. It is thereby made possible to search easily the recorded video and audio information. The examples to which the present invention described above is applied include "shopping". In this example, an object under consideration for reservation or purchase is photographed or recorded and then delivered over networks in the form of video or audio information (an AV stream of either accumulated or live video and audio). In addition, those who are going to reserve or buy the object are allowed to do so on the network (using a Web document). This makes it possible for those to reserve a seat or a room in a hotel or buy a condominium without actually going to the condominium or a concert hall to check the object. Incidentally, the supplementary information of an

photographed object includes control information of a camera (such as switching, action pan, or tilt angle of the camera).

Another example to which the present invention is applied is a "local advertisement" in each local area. In this example, local sightseeing or advertisement information is delivered over networks in the form of video or audio information (an AV stream of either accumulated or live video and audio). In addition, information on a discount bonus may be provided to the aforementioned sightseeing or advertisement information (using a Web document). (The discount bonus may be a coupon for a discount, the number of which displayed on the screen is noted by the user or the hard copy of which is presented at the time of purchase.) This makes it possible to predictably attract more customers.

Finally, take an example in which a stream is transmitted from inside to outside home. In this example, the stream comprises at least video or audio information. Only the actual body or the location of the stream (e.g., a home gateway or a terminal available inside home may be presented on the URL) may be transmitted to a service station (e.g., a provider) over a network. At the service station, the stream is edited to transmit the resulting stream to where it came from or alternatively only the search key resulted from the edition is transmitted to where the stream came from. An edit service can thereby be implemented via a



HTTP is described in more detail in R. Fielding et al.,  
"Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, Internet  
Engineering Taskforce, Jun. 1999. Now, it is checked whether  
the contents are accumulated in the gateway 242 (2502). If

5 true, the accumulated contents are acquired (2503), whereas  
if not true, the contents are received from the transmitter  
terminal 241 in which the contents are accumulated (2504).

Then, the size and the time constraint of the contents are  
attached to the contents as supplementary information (2505).

10 If the gateway 242 has determined that the contents can be  
transmitted within the constrained time (2506), the contents  
are transmitted (2507). If the contents are stored, this  
determination is made in accordance with the transmission  
rate and the size of the contents. For example, let the time  
15 constraint be  $T$  (sec) the transmission rate  $R$  (bits/sec), and  
the contents size  $S$  (bytes). It is not possible to transmit  
the contents if  $(8S/R)$  is less than  $T$ . On the other hand,  
suppose the contents are received by the transmitter terminal  
241. In this case, the reception causes the constrained time  
20 to be wasted, thereby decreasing the possibility of  
transmitting the contents within the constrained time.

If it is allowed to accumulate the contents (2508), the  
contents are accumulated in the gateway 242. The HTTP of  
version 1.1 provides a header of "Cache-Control:". If a  
25 header "Cache-Control: no-cache" is provided by the

transmitter terminal 241, it is not allowed to accumulate the contents and thus the contents are dropped (2510). Other contents are accumulated in the gateway 242 (2509).

When contents are first requested, the contents are not accumulated in the gateway 242. This may cause time to be wasted for receiving the contents from the transmitter terminal 241 and result in increasing the possibility of dropping the transmission of contents due to dissatisfaction of the time constraint. However, since the contents are accumulated in the gateway 242, the second or subsequent request for the same contents would immediately allow the transmission of the contents from the gateway 242, thereby increasing the possibility of satisfying the time constraint.

[Embodiment 3]

Now, an information transmission method according to a third embodiment of the present invention will be explained below with reference to Fig. 27. First, the gateway 242 receives from the receiver terminal 243 a request for contents and a communication rate or time constraint, which the receiver terminal 243 can ensure for the transmission of the contents (2701). As shown in Fig. 28, the request for the contents is made using HTTP. The communication rate and the time constraint can be requested using extended header of "Band-Width:" and "Time-Restriction:", respectively. In Fig. 28, shown is a request for transmitting "test.jpg" at a

communication rate of 64 kilo-bits/sec.

Now, the contents are acquired as in the second embodiment (2503, 2504). The size, time constraint, communication rate of the contents are attached to the contents as supplementary information and then the contents are transmitted at the specified communication rate (2707). When a specified communication rate is available, the contents are transmitted at the communication rate. When a specified size S and constrained time T of the contents are available, it is possible to satisfy the time constraint if the contents are send at a communication rate higher than determined by  $8S/T$ . When a specified communication rate R, contents size S, and constrained time T are all available, the contents can be transmitted at a communication rate greater than or equal to the communication rate R if  $8S/T$  is less than T, whereas no transmission is possible if not. However, when contents other than those accumulated are to be transmitted, it is necessary to receive the contents from the transmitter terminal 241, thereby time to be wasted for the reception of the contents. With a reception rate lower than the specified transmission rate, it is impossible to transmit the contents at a speed greater than the reception rate. When accumulated contents are to be transmitted, it is not necessary to receive the contents from outside, thereby making it possible to set an arbitrary transmission rate.

[Embodiment 4]

Now, an information transmission method according to a fourth embodiment of the present invention will be explained below. As shown in Fig. 29, on the receiver terminal 243, specified are "test.html" and the priority of two images "test1.jpg" and "test2.jpg", which are contended therein, using an extended header "Priority:" of HTTP. In response to this transmission request, the gateway 242 carries out transmissions in descending order of priority. In the case of Fig. 29, sent first is the "test.html" or a document to be based upon and then the image "test2.jpg". Even if a failure occurred at the time of transmitting "test2.jpg", damage due to the failure could be minimized if the user wants to view the "test2.jpg" more than the "test1.jpg". As another method for allowing the receiver terminal 243 to provide priority, such a method may be employed in which the order of transmission of requests from the receiver terminal 243 is arranged in a priority sequence. In addition, if the transmitter terminal 241 provides priority, it is made possible to transmit on a priority basis the information which the transmitter terminal 241 wants to show.

A multi-medium document containing an image has been taken as an example here. Nevertheless, for book-type contents with chapters, priority may be given to each chapter, thereby making it possible to transmit the index or an



important chapter on a top-priority basis or receive the most interested chapter first.

[Embodiment 5]

Now, an information transmission method according to a fifth embodiment of the present invention will be explained below with reference to Fig. 30. First, the gateway 242 receives from the receiver terminal 243 all of a request for contents, a communication rate, and a time constraint (2701). It is then checked whether accumulated are the requested contents having the size that can be transmitted at the specified communication rate and within the specified length of time (3002). If true, the contents are transmitted (3004). If not true, it is checked whether the requested contents themselves are accumulated (3003). If true, the contents are acquired (2503), whereas if not true, the contents are received from the transmitter terminal 241 (2504). Then, the size of the contents is attached to the contents as supplementary information (3005) and then the contents are accumulated as non-converted contents (3006). The resulting non-converted contents are converted so that the size  $S$  is less than  $8RT$  with respect to the time constraint  $T$  and communication rate  $R$  (3007). For image contents, the size of the image may be reduced, the number of colors may be reduced, or the image may be compressed to change their format, thereby making it possible to reduce the size of the contents.

The converted contents are attached with the size of the converted contents as a conversion condition and the name of the non-converted contents as supplementary information (3008), and then accumulated (3009). The resulting converted contents can be transmitted at the specified communication rate within the specified length of time.

The accumulated converted contents are thus transmitted, thereby making it possible to carry out the transmission immediately without wasting time for conversion. In addition, even when converted and accumulated contents are not available, non-converted contents can be converted, thereby never wasting transmission time for receiving contents from the transmitter terminal 241.

Such an example is shown in Fig. 31 in which the screen size and the number of display colors of the receiver terminal 243 are provided to the converted contents as supplementary information. Using an extended header of HTTP, the lateral width of the screen (Terminal-Width: 800) and the transverse width (Terminal-Height: 600) in dots, and the number of colors (Color-Depth: 16) in bits (16 bits = 65,536 colors) are transmitted from the receiver terminal 243 to the gateway 242 in conjunction with a request for contents. Then, the gateway 242 reduces the size of the image so as to suit this size. With this information being accumulated in conjunction with the converted contents, it is made possible

to respond to such a request for contents that is sent from a terminal of the same performance.

Incidentally, depending on the time required for conversion and transmission, such a case is conceivable in which the conversion and transmission within a constrained time are made impossible, such as in cases where a plurality of contents are transmitted or contents pass through many gateways. In these cases, instead of transmitting contents, a message "Transmission has been aborted since conversion cannot be made" is sent. This is made possible by making use of an extendable status code of HTTP.

[Embodiment 6]

Now, an information transmission method according to a sixth embodiment of the present invention will be explained below. An example of time constraint is shown in Fig. 32. Two types of time constraints are conceivable: the total time during which the transmitter terminal 241 transmits contents and the receiver terminal 243 receives the contents, and the time required for repeater processing at a gateway. As shown in Fig. 33, these two types of time constraints can be specified using an extended header of HTTP. In Fig. 33, the total time is constrained to 20 seconds and the time for repeater processing per one gateway is constrained to 5 seconds.

Fig. 34 shows an example of time constraint processing



receiver terminal 243 is presumably equal to the total time (total required time) to be taken for the acquirement of contents. However, since the total required time alone provides no allowable processing time at each gateway, it is desirable to specify the required time at each gateway on any one of the transmitter terminal 241, the gateway 242, and receiver terminal 243.

[Embodiment 7]

Now, an information transmission method according to a seventh embodiment of the present invention will be explained below. Compared with the transmission contents that the gateway 242 receives from the transmitter terminal 241 and then immediately transmits to the receiver terminal 243, the accumulated contents that the gateway 242 accumulates and then transmits to the receiver terminal 243 are advantageous in that the contents can be processed or attached with statistical data. Accordingly, statistical data can be transmitted to the receiver terminal 243 as supplementary information at the gateway 242 to allow the statistical information to be displayed at the receiver terminal 243 in conjunction with the supplementary information, thereby making it possible to show the operation condition of the gateway 242 or the like at receiver terminals. In particular, by employing the number of service frequencies of certain contents as supplementary information, it is readily possible

to show at the receiver terminal 243 the contents that are frequently used at the gateway 242. Fig. 35 shows an example in which the gateway 242 informs the receiver terminal 243 of the number of contents service frequencies of 254 using an extended header "Access:" of HTTP in response to a request for the contents from the receiver terminal 243. Fig. 36 shows an example of contents 3605 with two images 3601, 3602 having the number of service frequencies displayed as supplementary information 3603, 3604.

[Embodiment 8]

Now, an information transmission method according to an eighth embodiment of the present invention will be explained below. As shown in Fig.37, suppose the same contents as those of the transmitter terminal 241 are possibly accumulated at a gateway 1 (3701) and a gateway 2 (3702). In this case, the gateway 242 can receive the contents only from one of the three, from which the gateway 242 can receive the contents in the shortest time, and then transmits the contents to the receiver terminal 243.

It is to be understood that, to implement this, the gateway 242 manages the name, communication bandwidth, and response time of each of the gateways (3701, 3702). Terminals that act as a gateway inform adjacent network terminals of their name periodically or upon initiation of their operation. The gateway 242 receives and thus acquires

their name. Communication bandwidth can be statistically calculated by recording the number of bytes of contents and the time required for the contents to be received from a corresponding gateway. Response time is determined by the measurement of time required for answering to the inquiry transmitted to a corresponding gateway. For example, as shown in **Fig. 38**, sending the HEAD method of HTTP makes it possible to inquire whether corresponding contents are available and the answering time can be thus checked. Accordingly, the communication bandwidth and response time tell how long it takes to effect a transmission and at what response speed the corresponding gateway will respond. Thus, use can be made of the communication bandwidth and response time as a guideline for selecting advantageous gateway for a transmission.

It can be checked whether each gateway has the corresponding contents accumulated therein, using the HEAD method mentioned above or in accordance with a contents management table exchanged periodically in advance with each other. It is to be understood that the contents management table contains the name of the contents accumulated in the gateway, their supplementary information (including their size, and the date and time of accumulation), and whether the contents have been converted as well as the name of the non-converted contents if the contents have been converted.

Contents or converted contents are searched using these pieces of information, whereby it is made possible to find a path that imposes less load to the network and transmit the contents immediately over the path.

5 [Embodiment 9]

Now, an information transmission method according to a ninth embodiment of the present invention will be explained below. Referring to **Fig. 39**, suppose that the gateway **242** and the receiver terminal **243** are physically located close to each other, and an accumulation portion **3901** for accumulating contents is removed from the gateway **242** so that the receiver terminal **243** can reference the accumulation portion **3901**. In this case, even when the receiver terminal **243** and the gateway **242** cannot be connected with each other over the network, the accumulation portion **3901** can be physically transferred to allow the receiver terminal **243** to reference the accumulated contents.

For this purpose, the accumulation portion **3901** accumulates a contents management table similar to that of the eighth embodiment and the actual body of corresponding contents. Since the contents management table contains the supplementary information and conversion condition of contents, the contents that have been referenced so far can be referenced under the same condition, thereby making it possible to record number of service frequencies as a



supplementary condition.

[Embodiment 10]

Now, an information transmission method according to a tenth embodiment of the present invention will be explained below with reference to **Fig. 40**. The supplementary information attached to contents such as time constraints, which has been employed in the aforementioned embodiments, can be provided by any of the transmitter terminal **241**, the gateway **242**, or the receiver terminal **243**. Suppose the gateway **242** transmits contents using the HTTP protocol. In this case, the gateway **242** receives the supplementary information which is contained, in the form of an extended header, in a request message for contents from the receiver terminal **243** (for example, see **Figs. 26 and 28**) and a return message of contents from the transmitter terminal **241** (for example, see **Fig. 35**). This allows the gateway **242** to attach, to the contents to be transmitted to the receiver terminal **243**, any one of the supplementary information received from each of the transmitter terminal **241** and receiver terminal **243**, and the supplementary information issued from the gateway **242** by itself.

The attachment of supplementary information to contents by the transmitter terminal **241** makes it possible to transmit to the receiver terminal **243** a request of the transmitter terminal **241** such as for information on a level of importance

that the transmitter terminal 241 regards suitable for the contents. On the other hand, the attachment of supplementary information to contents by the receiver terminal 243 makes it possible to transmit to the gateway 242 a request of receiver terminal 243 such as for information on the length of time during which the receiver terminal 243 wants to acquire the contents and the order of the acquirement. Furthermore, the gateway 242 can transmit transmission load information and contents conversion management information of the gateway 242 such as the information on the number of service frequencies and bandwidth of the contents, and the condition employed for conversion at the gateway 242.

[Embodiment 11]

Now, an information transmission method according to an eleventh embodiment of the present invention will be explained below. In the foregoing embodiments, HTTP has been used for the request for and the transmission of contents. HTTP makes it possible to send supplementary information concurrently with a request for or the transmission of contents using an extended header.

Suppose contents are transmitted using RTP protocol (H. Schulzrinne et al., "RTP: A Transport Protocol for Real-Time Applications", RFC 1889, Internet Engineering Taskforce, Jan. 1996) to transmit stream data such as moving pictures or audio. In this case, a fixed header (4101) shown in Fig. 41

is attached to the data. Changing X (4102) of the fourth bit from the beginning of the header will make it possible to use an extended header (4103) below the double line of the figure. By defining "index" (4104) and "Value" (4105) as shown in Fig. 42, contents and supplementary information can be transmitted at the same time. Alternatively, X (4102) can be made 0 (zero) to specially define a payload type PT (4105) indicative of type of data. The data format of the remaining portion (4103) of the fixed header (4101) can thereby be made the same as that of Figs. 41 and 42 to transmit supplementary information.

RTCP ("RTP Control Protocol" included in the aforementioned RFC1889) is used for the receiver terminal 243 to transmit supplementary information involving no data but including a request for a change in bandwidth or time constraint. As shown in Fig. 43, RTCP makes it possible to define a description for each application by designating the payload type (4106) as 204. It is made possible to transmit supplementary information involving no data by providing "subtype" (4301) with an appropriate value (e.g., 24) and by defining "index" (4104) and "Value" (4105) as shown in Fig. 42.

[Embodiment 12]

Now, an information transmission method according to a twelfth embodiment of the present invention will be explained

below. **Fig. 44** shows the configuration of a network according to the present invention. The object "information" of the present invention can be used in any form of communication information (such as for telephone, FAX, e-mail, and message board) **424**, broadcast contents (such as for TV broadcast, radio, and Internet broadcast) **443**, and network contents (such as for WWW and directory service) **444**.

**Figs. 45A and 45B** are explanatory views illustrating the form of an information transmission. There are two forms in information transmission. As shown in **Fig. 45A**, one form is a method for transmitting an actual information body directly from an information transmitter terminal to a receiver terminal. At the receiver terminal, the actual information body is stored in a database **441** as necessary. As shown in **Fig. 45B**, the second method allows the transmitter terminal not to send the actual information body but to transmit to the receiver terminal a file describing the location of and a condition for acquiring the information. The receiver terminal acquires the actual information body in accordance with the description of the file received. Incidentally, in the case of **Fig. 45B**, the receiver terminal does not always need the database.

**Fig. 46** is an explanatory view illustrating a method for describing the location of and conditions for acquiring information. The description of an information storage

source are provided with information that can identify the location of information such as telephone numbers, addresses, latitudes, longitudes, http addresses, ftp (file transmission protocol) addresses, and mail addresses. In addition, the  
5 conditions for acquiring information from the information storage source contain, for example, a time period, time limit, bandwidth, compression method, file size, storage capacity, terminal load, cost, time required for a transmission, version information, priority to be presented,  
10 IP (Internet Protocol) address, port number, host name, typical image, and sensor information. As an implementation method, a protocol such as ftp, http, mail, or a special protocol may be used to inform an information receiver terminal of a condition for acquiring information. The same  
15 protocol may also be used for a receiver terminal to acquire an actual information body.

Referring to **Fig. 46**, a description method 1 is an example in which the location of information is described using the ftp protocol. On the other hand, a description  
20 method 2 is an example in which the location of information is described using a telephone number, an address, a latitude, and a longitude. A description method 3 is an example in which described are a time period during which information can be acquired (e.g., an acquirement is allowed during a  
25 time period from AM0:00 to AM8:00) and a time limit (e.g., a

corresponding file is acquired within one hour). Description methods 4, 5, and 6 are examples in which described are bandwidth, a storage capacity, and a terminal load, respectively. In method 4, for example, a corresponding file is acquired if bandwidth of 64 kbps or more is available but the file is not acquired if the bandwidth is not available. In method 5, a corresponding file is acquired if a storage capacity of 3 MB or more is available to a receiver terminal. Here, the file has a size of 1MB or less and a compression method of JPEG is employed. In method 6, a corresponding file is acquired if the load of the transmitter terminal is below 50%. The terminal load and bandwidth available may be estimated according to the response time, delay time, jitter, or packet loss. A plurality of locations and acquirement conditions of these pieces of information may exist. Costs may also be described. In accordance with the compression method or transmission bandwidth, it is also allowed to describe the estimated time required for a reception, the version information, the priority the sender wants to present, the IP address, the port number, the host name, the typical image, and the sensor information (description methods 7 to 11). In accordance with these pieces of information, the information to be acquired is selected, a proper compression is effected at the transmitter terminal, a transmission bandwidth is reserved at the transmitter terminal or receiver

terminal.

Fig. 47 is an explanatory view illustrating the configuration of a transmitter and receiver terminal. The transmitter and receiver terminals comprise a transmission  
5 portion 4701 for transmitting and receiving information, a transmission bandwidth management portion 4702 for managing information on transmission bandwidth available, a time management portion 4703 for managing time information, and a user management portion 4704 for managing user information  
10 (such as the user name, the information on the storage capacity available to the user, and the billing information for information) and the user location (e.g., the name of a machine). The transmitter and receiver terminals also comprise a storage capacity management portion 4705 for  
15 managing the storage capacity of the terminals, a terminal load management portion 4706 for managing the load of the terminals, a storage portion 4707 for storing information in the terminals, and a terminal control portion 4708 for controlling these portions. Both the transmitter terminal  
20 and the receiver terminal do not need to be provided with all functions (e.g., the storage portion is not always required). In addition, the transmitter terminal may inform the receiver terminal that the transmitter terminal itself has information or may instead inform the receiver terminal of the location  
25 of a terminal that is provided with the information.

Furthermore, the information transmitter terminal may transmit information itself or only a description of the storage source of information and a description of the condition for acquiring information from storage source of information in accordance with one or more conditions of a time period, time limit (e.g., the time for discarding information), bandwidth, compression method, file size, storage capacity, terminal load, cost, time required for a transmission, version information, priority to be presented, IP address, port number, host name, typical image, and sensor information. Similarly, the information receiver terminal may select the information that should be acquired from the storage source of information in accordance with one or more conditions of a time period, time limit, bandwidth, compression method, file size, storage capacity, terminal load, cost, time required for a transmission, version information, priority to be presented, IP address, port number, host name, IP address, port number, host name, typical image, and sensor information. The condition for acquiring these pieces of information can also be used not only between the transmitter and receiver terminals but also for the reservation of network resources such as a gateway, a router, and cache, through which information passes.

The present invention allows information to be accumulated and managed in the form of the combination of the



storage source of the information and the condition for acquiring the information or the information itself. This obviates the need for making all the information available in the same storage device. Therefore, information can be centralized without preparing a large-scale storage capacity. This facilitates application of the present invention to a low-performance device representative of a household electrical appliance or a low-performance network. On the other hand, since the actual information body is not centralized, the load of the storage device (processing and maintenance) can be distributed. In other words, it is not necessary to transmit the actual information body to the source of requested information but only inform the source of the location of the actual information body and the condition for acquiring the information. The source of requested information acquires the actual information body in accordance with the location of the actual information body and the condition for acquiring the information, which have been provided. Furthermore, even when the actual information body cannot be transmitted due to the shortage of transmission bandwidth or storage capacity, only the storage source of the information and the condition for acquiring the information can be transmitted, thereby facilitating the management of updating the information. It is not necessary for the one who acquires information to acquire the actual

information body but only necessary to reference the  
condition for acquiring information (e.g., a typical image).  
In addition, for example, use of sensor information makes it  
possible to automatically inform the user of the update of  
5 information. In a case where a problem of communication cost  
may arise, it is also possible to schedule the actual  
information body to be acquired at a low communication cost  
during midnight. The present invention can be thus applied  
to the cases where transmission bandwidth or terminal  
10 performance vary.

**Fig. 48** show explanatory views illustrating methods for  
using a mobile terminal. In a first example, a home server  
manages purchase information and advertisement information.  
In this example, it is to be understood that the user  
15 purchases goods using on-line shopping, and in accordance  
with an actual record of goods purchased at a shop, the  
information on the purchased goods or service or  
advertisement information is sent to and stored in the home  
server. Suppose the home server is a first terminal and the  
20 mobile telephone is a second terminal. Suppose also the  
second terminal is provided with means for storing  
information. The information that is managed by the first  
and second terminals is checked and the information of the  
second terminal is updated. Upon update of information,  
25 updated are at least one or more pieces of an actual

information body, the description of a storage source of information, and the condition for acquiring information from the storage source of information. The update is carried out in accordance with the user name, date and time, the type of information (purchase information and advertisement information). The second example describes the connection between a checkout of the shop and a mobile terminal. The user compares the purchase information to be inputted into a POS (Point of Sales) system employed in the shop with the information managed by the user's mobile terminal to update the information in the same way as in the first example. (Here, suppose the POS system of the shop is a first terminal and the mobile terminal of the user is a second terminal.)

In addition, upon update of the information of the second terminal, the advertisement information is transferred or updated and thereby a bonus is given to the user of the second terminal (e.g., a discount on communication cost and the terminal fee or an issue of a coupon). Incidentally, the purchase information may contain at least one or more pieces of information of the purchaser's name, goods' name, service name, quantity, shelf life, expiry date, and date of repair (it may contain information regarding goods such as ingredients or materials used, country of origin, and (the level of) popularity). Furthermore, the advertisement information comprises at least one or more pieces of

information of the advertiser, the shop, goods' name, service  
name, information on entertainment, and expiry date of  
advertisement. Any one of wireless means, wired means, or a  
storage medium may be employed for communication between the  
5 mobile terminal and the first terminal. The mobile terminal  
may be any one of a personal computer, a mobile telephone, or  
an IC card. The update and management of purchase and  
advertisement information by the mobile terminal allow the  
user to easily maintain the purchase record of goods or  
10 service (house-keeping account book), record of repair of  
devices, stock management of food or consumables as well as  
to find easily new goods, service, or shops in the  
advertisement. Furthermore, the purchase and advertisement  
information may be managed not by the shop but by an  
15 independent organization or company. The independent  
organization or company can make a profit by advertisement  
information or by collecting pieces of purchase information  
from a plurality of shops to summarize purchase trends and  
feed back the trends to the shops. It is also possible that  
20 a shop does not provide an independent organization with the  
purchase information of the user but the user himself or  
herself provides the independent organization with the  
purchase information to receive a bonus (such as a discount  
on communication cost or terminal fee or the issue of a  
25 coupon) in exchange thereof. The independent organization

can make a profit from the advertisement fee paid by shops or from the provision of information such as on purchase trends of consumers. The first and second terminals may comprise the transmitter and receiver terminals described in Fig. 47.

5       **Fig. 49** is an explanatory view illustrating a message control terminal for composing and decomposing messages. The arrangement of **Fig. 49** comprises a message analysis portion for receiving information and analyzing the destination and the description of the information, and a message composing  
10       portion for performing one of the accumulation, conversion, and composition of the information in accordance with the analysis of the information and then transmitting the resulting information. The arrangement converts the information into at least one or more forms of an actual  
15       information body, a description of storage source of information, and a condition for acquiring information from the storage source of information in accordance with the analysis of the information, and then stores or transmits the resulting converted information. On the other hand, the  
20       arrangement also comprises a message analysis portion for receiving information and analyzing the destination and the description of the information, and a message decomposing portion for acquiring the information from a storage portion for conversion, decomposition, and transmission of the  
25       information in accordance with the analysis of the

information. The arrangement converts the information into at least one or more forms of an actual information body, a description of storage source of information, and a condition for acquiring information from the storage source of information in accordance with the analysis of the information, and then transmits the resulting converted information. Incidentally, both the functions for composing and decomposing a message may be or may not be provided to the same message control terminal. If both the functions are available, the message control portion may centralize and manage the functions as shown in Fig. 49.

Fig. 50 is an explanatory view illustrating an example of using the message control terminal for composing and decomposing messages. Fig. 50 shows an example of a message control terminal applied to an ITS (Intelligent Transport System). The ITS can acquire successively sensor information or AV information (audio and video) from roads and vehicles in accordance with places (location information). Here, the sensor information denotes GPS (Global Positioning System) information or the like. In a large-scale network, it is difficult to centralize and manage sensor information or AV information, which are acquired at various places, from the viewpoints of network resources and storage capacity. As shown in Fig. 50, a hierarchical arrangement of message control terminals described in Fig. 49 facilitates

information management. That is, end networks close to vehicles and roads can acquire many pieces of sensor information or AV information. For this reason, a plurality of pieces of sensor information or AV information are divided  
 5 by location or a time period (integrated into one message). The resulting messages are stored in the storage device of an end message control terminal, then the location of the storage source and the summarized sensor information are transmitted to a center station. Thus, the amount of  
 10 information to be transmitted to the center station is reduced. A user who wants to reference the summarized sensor and AV information can acquire the location of the AV information storage source and the sensor information from the center station, and the actual information body from the  
 15 storage source of the AV information.

On the contrary, suppose the AV information or the sensor information that has been collected at the center station is delivered to users. In this case, the center station delivers the sensor information and the location of  
 20 the related AV information, while the actual body of the AV information is acquired from the AV information storage device of an end message control terminal. The acquired actual body is delivered to the user in conjunction with the sensor information.

25 This system may also be operated in such a way that

advertisement information is collected from end users at each area, combined, and delivered to other users. The advertisement information may be delivered from the center station. System operators can make a profit from an information provision fee (sensor information and AV information) or an advertisement fee. The present invention facilitates large-scale collection and transmission of information. Incidentally, the message control terminal may comprise the transmitter and receiver terminals described in **Fig. 47.** That is, information may be transmitted or accumulated in any form of expression of an actual information body, a description of storage source of information, and a condition for acquiring information from the storage source of information in accordance with the remaining amount of transmission bandwidth or storage capacity.

In any case of **Figs. 48 to 50,** information can be updated in accordance with time, a location (GPS), a mobile telephone within a dead space or not, the instruction of a user, or the storage capacity and transmission bandwidth of the information.

For example, the present invention can be applied to the WWW cache and information search service on the Internet or to the accumulation-type communication device of a telephone (including a phone-answering type) and FAX.



09869654-063304  
T093990499980

However, the transmission path is not limited to the Internet protocol. Without preparing a large-capacity storage device, the present invention makes it possible to manage information and contents in one storage device and acquire necessary information in an easy manner. Here, the information and contents include communication information (such as of a telephone, FAX, e-mail, or a message board), broadcast contents (such as of a TV broadcast, a radio broadcast, or an Internet broadcast), and network contents (such as of WWW or directory service).

[Embodiment 13]

Now, an information transmission method according to a thirteenth embodiment of the present invention will be explained below with reference to Fig. 51. The system of Fig.

51 comprises a service provision terminal provided with a storage device, and a user terminal which can accommodate one or more apparatuses such as a personal computer (PC), FAX, (mobile) telephone (and which is connected to a network).

The system is adapted to compare information held by each apparatus with information stored in the storage device of the service provision terminal in accordance with a specified rule to update the information stored in the storage device of the service provision terminal (Fig. 51(1)). The

information stored in a storage device provided to an apparatus can be transmitted to the service provision

terminal and updated, whereby the information of the apparatus can be referenced or modified even when the apparatus is turned off. Suppose the information of the service provision terminal has been updated. Even in this case, when the apparatus at home is turned on to be available for service, the apparatus will check updates of the information of the service provision terminal and then update the information of the apparatus itself, thereby making it possible to keep consistency of the information.

Incidentally, when a storage device is available at the user terminal, the apparatus or the service provision terminal may update information via the storage device of the user terminal. Predetermined information (e.g., a document file of a specific directory) is updated only when at least one or more operations have been performed. That is, the update is carried out at the time of termination of an apparatus, at predetermined intervals, at the time of reading or recording information on the storage device, or at the time of having performed a predetermined operation (e.g., in the absence of I/O operation during a given period of time). Here, for example, what is meant by the information includes a document file for the personal computer, an electronic image file (or a file attached to e-mail) for the FAX, and electronically recorded audio for the telephone.

Alternatively, the system comprises a service provision

terminal provided with a storage device, and a user terminal which can accommodate one or more apparatuses and which is provided with a storage device. The system is adapted to compare information held by the user terminal with  
5 information stored in the storage device of the service provision terminal in accordance with a specified rule to update the information stored in the storage device of the service provision terminal (**Fig. 51(2)**). Suppose various pieces of information are collected and recorded at the user  
10 terminal. In this case, the information is transmitted to and updated at the service provision terminal to allow easy access to the information inside home from outside home. Like the foregoing system, even when the information of the service provision terminal has been updated, the information  
15 of the user terminal is updated automatically, thereby making it possible to keep consistency of the information. This service form can be applied to a case where all pieces of home information are centralized at the storage device of the user terminal.

20 In a still another form of service, the system comprises a service provision terminal provided with a storage device, and a user terminal which can accommodate one or more apparatuses and which is provided with a storage device. The system is adapted to compare information held by  
25 each apparatus with information stored in the storage device

of the user terminal in accordance with a specified rule to  
update the information stored in the storage device of the  
user terminal. The information stored in a storage device  
provided to an apparatus can be transmitted to the terminal  
5 and updated, whereby access is available to the information  
of the apparatus even when the apparatus is turned off (**Fig.**  
**51(3)**). Suppose the information of the user terminal has  
been updated. Even in this case, when the apparatus at home  
is turned on to be available for service, the apparatus will  
10 check updates of the information of the user terminal and  
then update the information of the apparatus itself, thereby  
making it possible to keep consistency of the information.  
In this service form, it is not necessary to prepare a  
service provision terminal (a storage device) that is  
15 provided by a provider.

As described above, according to the arrangement of **Fig.**  
**51**, the information of an apparatus can be readily referenced  
or updated even when the apparatus at home is turned off or  
access thereto is restricted. A protocol for updating  
20 information may be a standard protocol such as ftp or a  
special protocol. Incidentally, this system can be applied  
not only to home use but also to mobile communications  
typically for vehicle use.

## Industrial Applicability

According to the present invention, it is possible to implement a gateway which allows for efficient use of transmission bandwidth and storage media irrespective of a transmission gap between a transmitter and receiver side. The gateway can be applied not only to a home gateway but also to a gateway to be used in a vehicle and to a mirror server. The present invention makes it possible to employ as a transmission path not only a communication line such as a telephone, ATM, wireless LAN, or Bluetooth line but also a broadcast medium such as CATV or a satellite broadcast. This technology is effective even when stream video and document information are referenced simultaneously such as in a television broadcast with an information link like the BS digital broadcast.

**CLAIMS:**

1. An information transmission method comprising the steps of:

monitoring transmission bandwidth for transmitting data  
5 to and receiving data from a transmitter terminal,

determining a procedure of requesting for data with a request for transmission being employed as input, and

controlling a service method of a cache in accordance with information on bandwidth of said transmitter terminal  
10 and said request for data.

2. The information transmission method according to claim 1, further comprising the step of allowing a user to input said request for transmission.

3. The information transmission method according to  
15 claim 1, further comprising the step of:

upon acquirement of information, using a load management rule to provide an information storage method for reducing a transmission bandwidth used for acquiring the information.

20 4. The information transmission method according to claim 1, further comprising the step of:

upon acquirement of information, using an information freshness management rule to provide an information storage method for improving freshness of information to be  
25 accumulated.

5. The information transmission method according to claim 1, further comprising the step of:

in accordance with a transmission bandwidth available, managing information to be accumulated as appropriate by using a load management rule to provide an information storage method for reducing a transmission bandwidth used for acquiring the information or by using an information freshness management rule to provide an information storage method for improving freshness of information to be accumulated.

6. The information transmission method according to claim 1, further comprising the step of:

placing priority on contents to be acquired.

7. The information transmission method according to claim 1, further comprising the step of:

monitoring transmission bandwidth for transmitting data to and receiving data from a receiver terminal,

allowing a user to input said request for transmission at said receiver terminal , and

controlling a service method of said cache in accordance with information on bandwidth of said receiver terminal.

8. The information transmission method according to claim 7, further comprising the step of:

controlling a method for transferring data in

accordance with the bandwidth information of said transmitter terminal, the bandwidth information of said receiver terminal, and said request for data.

9. The information transmission method according to  
5 claim 7, further comprising the step of:

defining a service bandwidth for each application, and discarding information at a probability defined for each terminal or user within the defined bandwidth when congestion has occurred.

10 10. The information transmission method according to claim 7, further comprising the step of:

allowing program information and contents management information containing a description of a location of program-related information to be inputted, acquiring and  
15 accumulating the program-related information automatically in advance by a receiver side before or in response to progress of a program, and presenting the information acquired in advance by the receiver side in response to a program rating.

11. The information transmission method according to  
20 claim 7, further comprising the step of:

allowing contents having a time constraint as supplementary information to be inputted, and transmitting said contents within a specified length of time in accordance with said supplementary information, or accumulating said  
25 contents incapable of being transmitted within the time in



preparation for a re-transmission thereof.

12. The information transmission method according to claim 7, further comprising the steps of:

accumulating contents having a communication rate as  
5 supplementary information, and

allowing said accumulated contents to be inputted, and  
transmitting said accumulated contents while bandwidth of  
said accumulated contents is being controlled in accordance  
with said supplementary information to thereby transmit said  
10 accumulated contents at the specified communication rate.

13. The information transmission method according to claim 7, further comprising the step of:

allowing contents having a time constraint and  
communication rate as supplementary information to be  
15 inputted, converting and transmitting a size of said contents  
in accordance with said supplementary information to thereby  
transmit said contents at the specified communication rate  
within a specified length of time.

14. The information transmission method according to  
20 claim 7, further comprising the step of:

allowing contents having a time constraint and  
communication rate as supplementary information to be  
inputted, transmitting accumulated converted contents having  
the same description as that of said contents and having the  
25 same supplementary information as said supplementary

information, converting a size of said inputted contents in accordance with said supplementary information if corresponding accumulated converted contents are not available, and accumulating and transmitting converted contents in conjunction with supplementary information containing both a name and a size of non-converted contents to thereby transmit contents at the specified communication rate within a specified length of time while conversion time is being saved.

10 15. The information transmission method according to claim 7, further comprising the step of:

upon transmission of accumulated contents, allowing said contents to be attached with supplementary information corresponding to a condition of said accumulated contents and transmitted, said contents with said supplementary information to be received, and said supplementary information to be displayed by said receiver terminal.

16. The information transmission method according to claim 7, further comprising the step of:

20 determining whether said transmitter terminal transmits information itself in accordance with supplementary information of contents or only a storage source of information and a description of a condition for acquiring information from the storage source of information.

25 17. The information transmission method according to

claim 7, further comprising the step of:

selecting information to be acquired by said receiver terminal from the storage source of information in accordance with supplementary information of contents.

5 18. The information transmission method according to claim 7, further comprising the step of:

in accordance with a result of analysis of information, allowing the information to be converted into and transmitted in at least one or more forms of an actual information body,  
10 a description of storage source of the information, and a condition for acquiring the information from the storage source of the information.

19. An information transmission system comprising  
a transmitter terminal communication interface for  
15 transmitting data to and receiving data from at least one transmitter terminal,

a transmitter terminal bandwidth monitor portion for monitoring a transmission bandwidth for transmitting data to and receiving data from said transmitter terminal,

20 a storage portion for accumulating data,

a request management portion for allowing a request for a transmission to be inputted and determining a procedure of the request to be outputted, and

a data management portion for controlling a method for  
25 using said storage portion in accordance with bandwidth

information of the transmitter terminal monitored by said transmitter terminal bandwidth monitor portion and the request from said request management portion.

20. The information transmission system according to  
5 claim 19, further comprising

means for allowing a user to input said request for a transmission.

21. The information transmission system according to claim 19, further comprising

10 a data interpretation portion for interpreting a description of data acquired by said data management portion, extracting a data address considered being requested subsequently, and determining an order of the request in accordance with a transmission condition to request said  
15 request management portion for data.

22. The information transmission system according to claim 19, further comprising

a vehicle information management portion for managing at least one or more of a vehicle location, a standstill  
20 condition of the vehicle, a traveling direction of the vehicle, date and time, weather, and user defined information.

23. The information transmission system according to claim 19, further comprising a database management portion having at least one or more of

25 recording time management means for managing a

recording time of the acquired information,

reference time management means for managing a reference time of the acquired information,

search key management means for managing a search key  
5 provided for the acquired information, and

copy status management means for managing a copy status of the acquired information.

24. The information transmission system according to claim 19, further comprising

10 a transfer control portion for acquiring requested data from said data management portion in response to a request from said request management portion, and processing the data acquired from said data management portion as necessary in accordance with a transmission condition from said request  
15 management portion or said data management portion.

25. The information transmission system according to claim 24, further comprising a capacity monitor portion for monitoring a storage capacity of said storage portion, wherein

20 said data management portion selects at least one of storing in said storage portion, transferring to said transfer control portion, and discarding data inputted at said transmitter terminal communication interface or data specified by said transfer control portion and acquired from  
25 said storage portion, in accordance with at least one of a

transmission condition from said transmitter terminal  
inputted at said transmitter terminal communication interface,  
bandwidth information of said transmitter terminal monitored  
by said transmitter terminal bandwidth monitor portion, and  
5 storage capacity information of said storage portion  
monitored by said capacity monitor portion, as well as sends  
transfer control information to said transfer control portion.

09365664-062801  
26. The information transmission system according to  
claim 24, further comprising a transmitter terminal bandwidth  
10 control portion for managing and controlling transmission  
bandwidth of said transmitter terminal communication  
interface, and a schedule management portion for issuing a  
request specified by said request management portion to said  
transmitter terminal communication interface at time  
15 specified by or timing specified by said request management  
portion,

said information transmission system wherein

concerning said request for a transmission, said  
request management portion outputs an inquiry for presence or  
20 absence of data in conjunction with a transmission condition  
to said transfer control portion and transmits the stored  
data in accordance with the transmission condition,

if the stored data does not exist, said request  
management portion transmits bandwidth control information to  
25 said transmitter terminal bandwidth control portion in

accordance with at least one of a type of requested data, a  
transmission condition from said transmitter terminal  
acquired from said transfer control portion, a transmission  
condition of the system acquired from said transfer control  
5 portion, and bandwidth information of the transmitter  
terminal monitored by said transmitter terminal bandwidth  
monitor portion, and

09869664-063804  
said request management portion determines a request  
procedure and then allows said transmitter terminal  
10 communication interface to transmit the request to said  
transmitter terminal, the request to be outputted to said  
schedule management portion in conjunction with a request  
transmission schedule, or the request having already been  
held in said schedule management portion to be outputted.

15 27. The information transmission system according to  
claim 19, further comprising

a receiver terminal communication interface for  
transmitting data to and receiving data from at least one  
receiver terminal,

20 a receiver terminal bandwidth monitor portion for  
monitoring transmission bandwidth for transmitting data to  
and receiving data from said receiver terminal, and

means for inputting said request for a transmission at  
said receiver terminal,

25 said information transmission system wherein

said data management portion has further a function for  
controlling a method for using said storage portion in  
accordance with the bandwidth information of the receiver  
terminal monitored by said receiver terminal bandwidth  
5 monitor portion.

28. The information transmission system according to  
claim 27, wherein

said data management portion has further a function for  
controlling a method for transferring data in accordance with  
10 bandwidth information of the transmitter terminal monitored  
by said transmitter terminal bandwidth monitor portion,  
bandwidth information of the receiver terminal monitored by  
said receiver terminal bandwidth monitor portion, and a  
request from said request management portion.

29. The information transmission system according to  
15 claim 27, further comprising

a transfer control portion for acquiring requested data  
from said data management portion in response to a request  
from said request management portion, and processing the data  
20 acquired from said data management portion as necessary to be  
transmitted from said receiver terminal communication  
interface to said receiver terminal in accordance with a  
transmission condition from said request management portion  
or said data management portion.

30. The information transmission system according to



claim 29, further comprising

a receiver terminal bandwidth control portion for managing and controlling transmission bandwidth of said receiver terminal communication interface, and

5 a capacity monitor portion for monitoring a storage capacity of said storage portion, wherein

09869664-063301

said data management portion selects at least one of storing in said storage portion, transferring to said transfer control portion, and discarding data inputted at  
10 said transmitter terminal communication interface or data specified by said transfer control portion and acquired from said storage portion, in accordance with at least one of a transmission condition from said transmitter terminal inputted at said transmitter terminal communication interface,  
15 a transmission condition from said receiver terminal inputted at said transfer control portion, bandwidth information of the receiver terminal monitored by said receiver terminal bandwidth monitor portion, bandwidth information of the transmitter terminal monitored by said transmitter terminal  
20 bandwidth monitor portion, and storage capacity information of said storage portion monitored by said capacity monitor portion, as well as sends bandwidth control information to said receiver terminal bandwidth control portion and transfer control information to said transfer control portion.

25 31. The information transmission system according to

claim 29, further comprising

a transmitter terminal bandwidth control portion for managing and controlling transmission bandwidth of said transmitter terminal communication interface, and a schedule management portion for issuing a request specified by said request management portion to said transmitter terminal communication interface at time specified by or timing specified by said request management portion,

said information transmission system wherein

concerning a request received by said receiver terminal communication interface from said receiver terminal, said request management portion outputs an inquiry for presence or absence of data in conjunction with a transmission condition to said transfer control portion and transmits the stored data in accordance with the transmission condition,

if the stored data does not exist, said request management portion transmits bandwidth control information to said transmitter terminal bandwidth control portion in accordance with at least one of a type of requested data, a transmission condition from said transmitter terminal acquired from said transfer control portion, a transmission condition of the system acquired from said transfer control portion, and bandwidth information of the transmitter terminal monitored by said transmitter terminal bandwidth monitor portion, and

said request management portion determines a request procedure and then allows said transmitter terminal communication interface to transmit the request to said transmitter terminal, the request to be outputted to said  
5 schedule management portion in conjunction with a request transmission schedule, or the request having already been held in said schedule management portion to be outputted.



## ABSTRACT

The object is to provide a gateway (100) comprising a transmitter terminal communication interface (103) for transmitting data to and receiving data from at least one transmitter terminal (101) and a receiver terminal communication interface (104) for transmitting data to and receiving data from at least one receiver terminal (102).

The gateway also comprises a transmitter terminal bandwidth monitor portion (106) for monitoring a transmission bandwidth for transmitting data to and receiving data from the transmitter terminal (101) and a receiver terminal bandwidth monitor portion (105) for monitoring a transmission bandwidth for transmitting data to and receiving data from the receiver terminal (102). The gateway further comprises a storage

portion (112) for accumulating data and a request management portion (110) for allowing a request from the receiver terminal (102) to be inputted, and determining a procedure of the request to be outputted. The gateway further comprises a data management portion (109) for controlling a method of using the storage portion (112) and a method of transferring data in accordance with bandwidth information of the transmitter terminal monitored by the transmitter terminal bandwidth monitor portion (106), bandwidth information of the receiver terminal monitored by the receiver terminal bandwidth monitor portion (105), and the request from the

request management portion (110). This makes efficient use of transmission bandwidth of the transmitter and receiver sides.

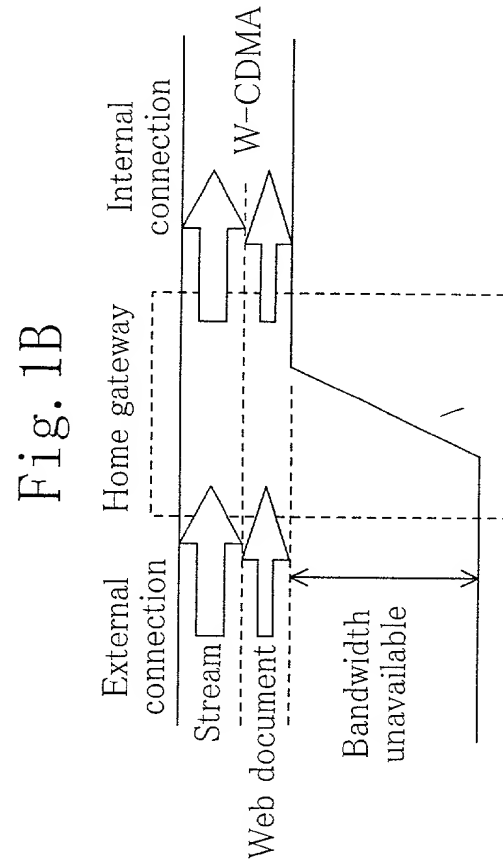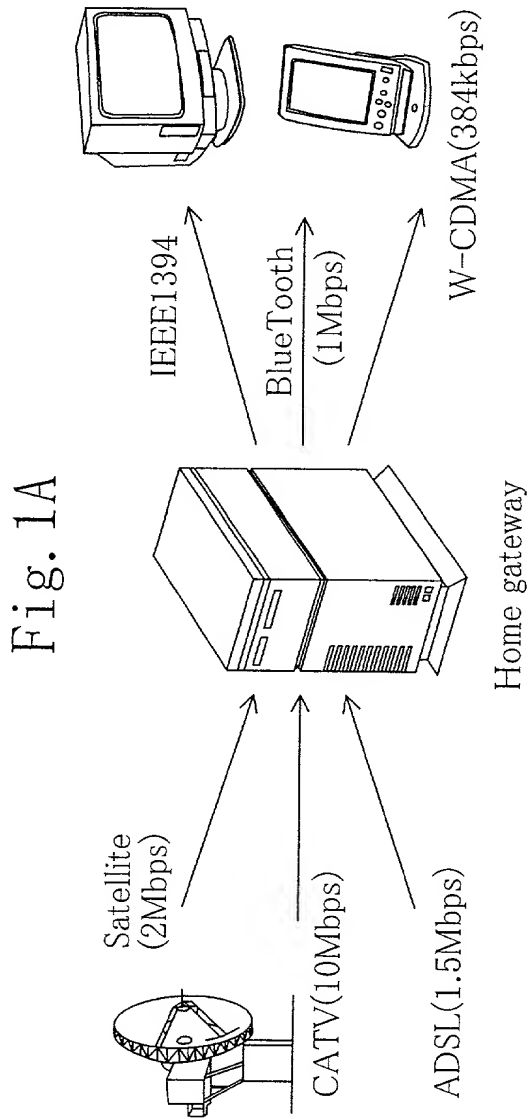

2/44

Fig. 2A

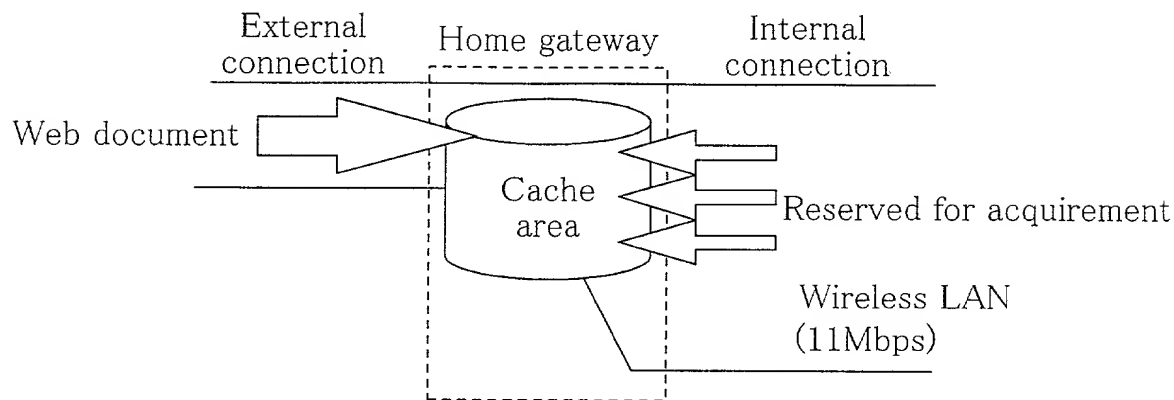


Fig. 2B


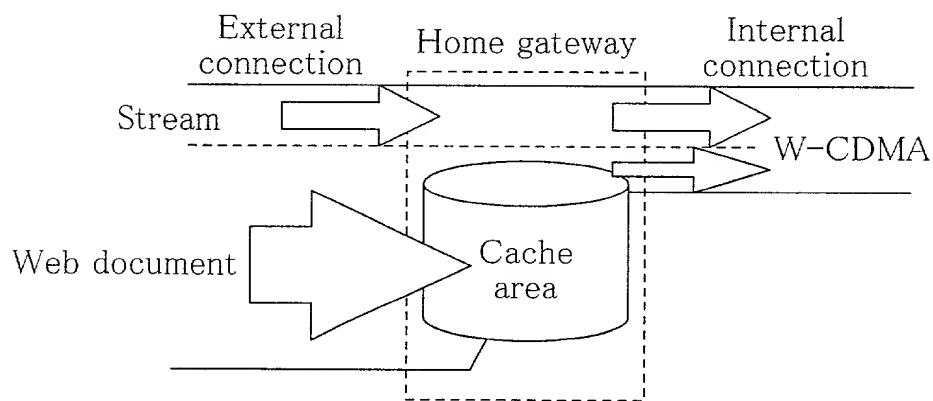


Fig. 3

TV broadcast operatively associated with Web



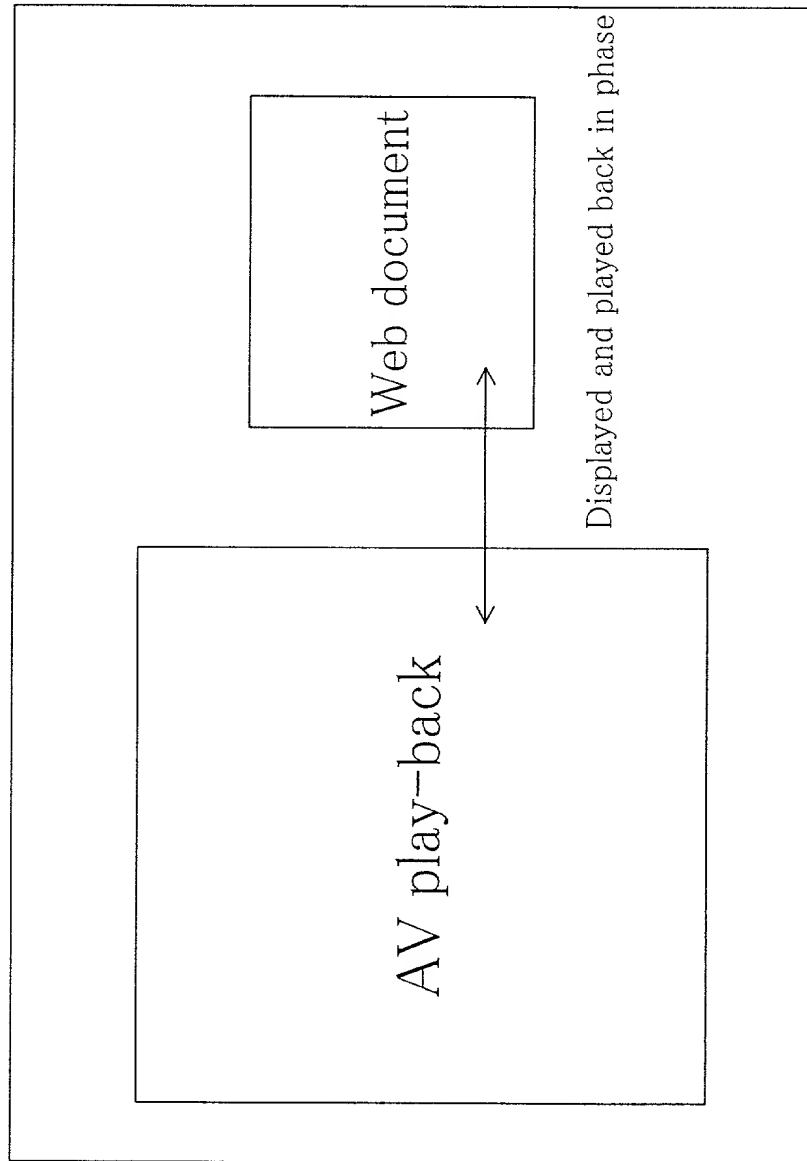

[illegible]

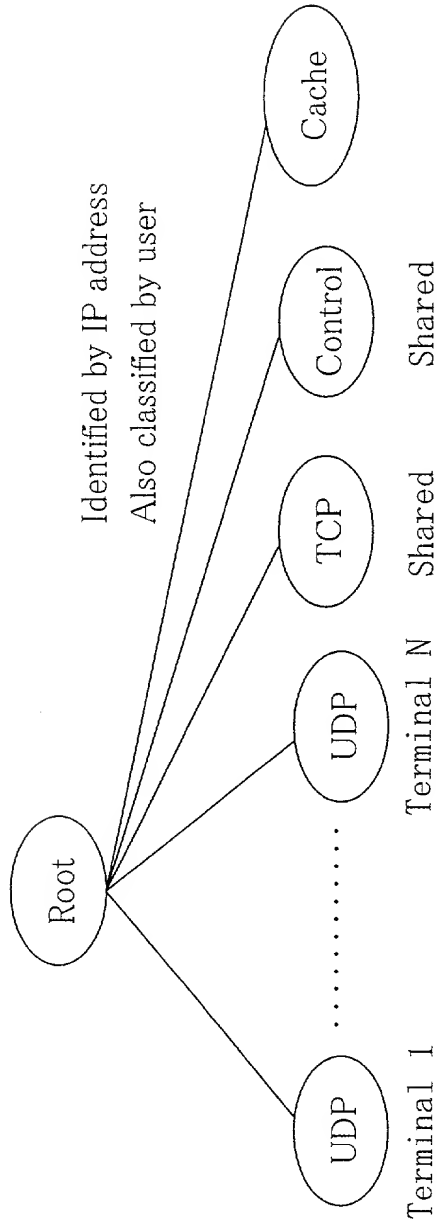


Fig. 5A

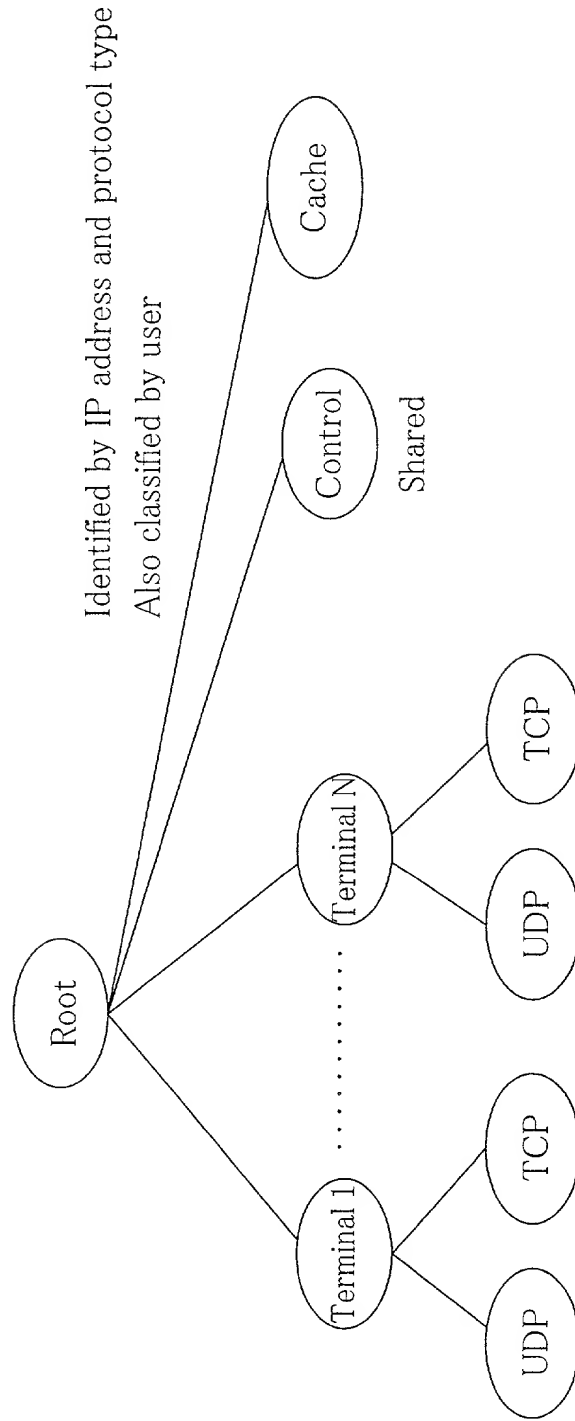


Fig. 5B


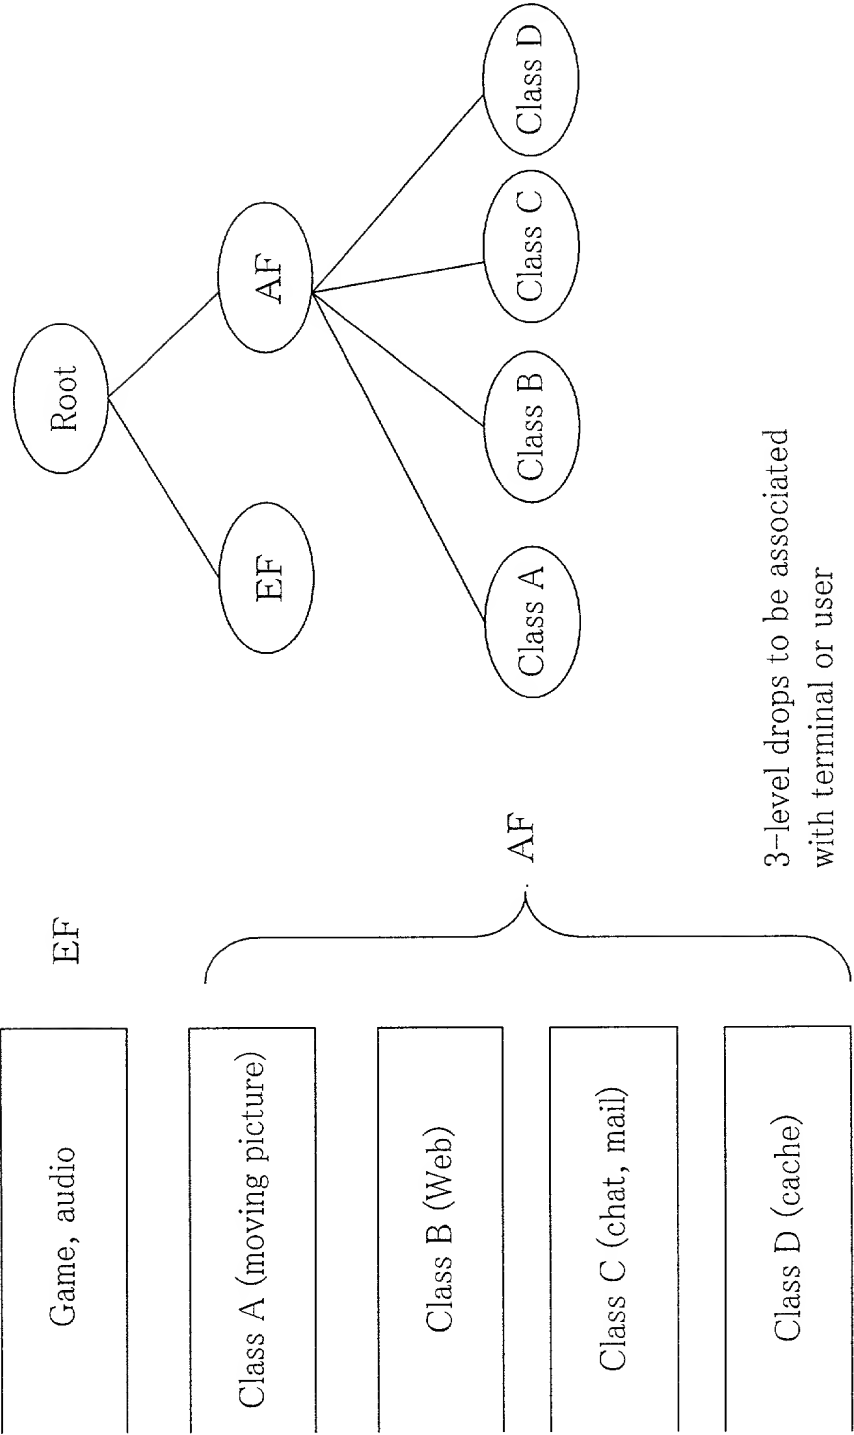


Fig. 6

FIG. 6

Fig. 7

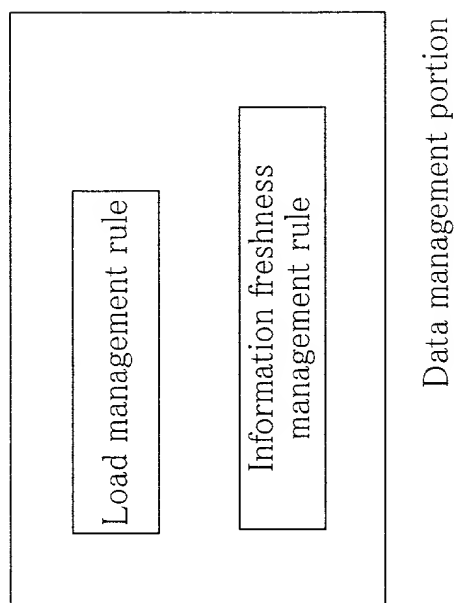

Load management rule: Most recent time of reference, Size, Effective information acquirement speed, Media type  
Information freshness management rule: Most recent time of recording, number of times of reference

Fig. 8



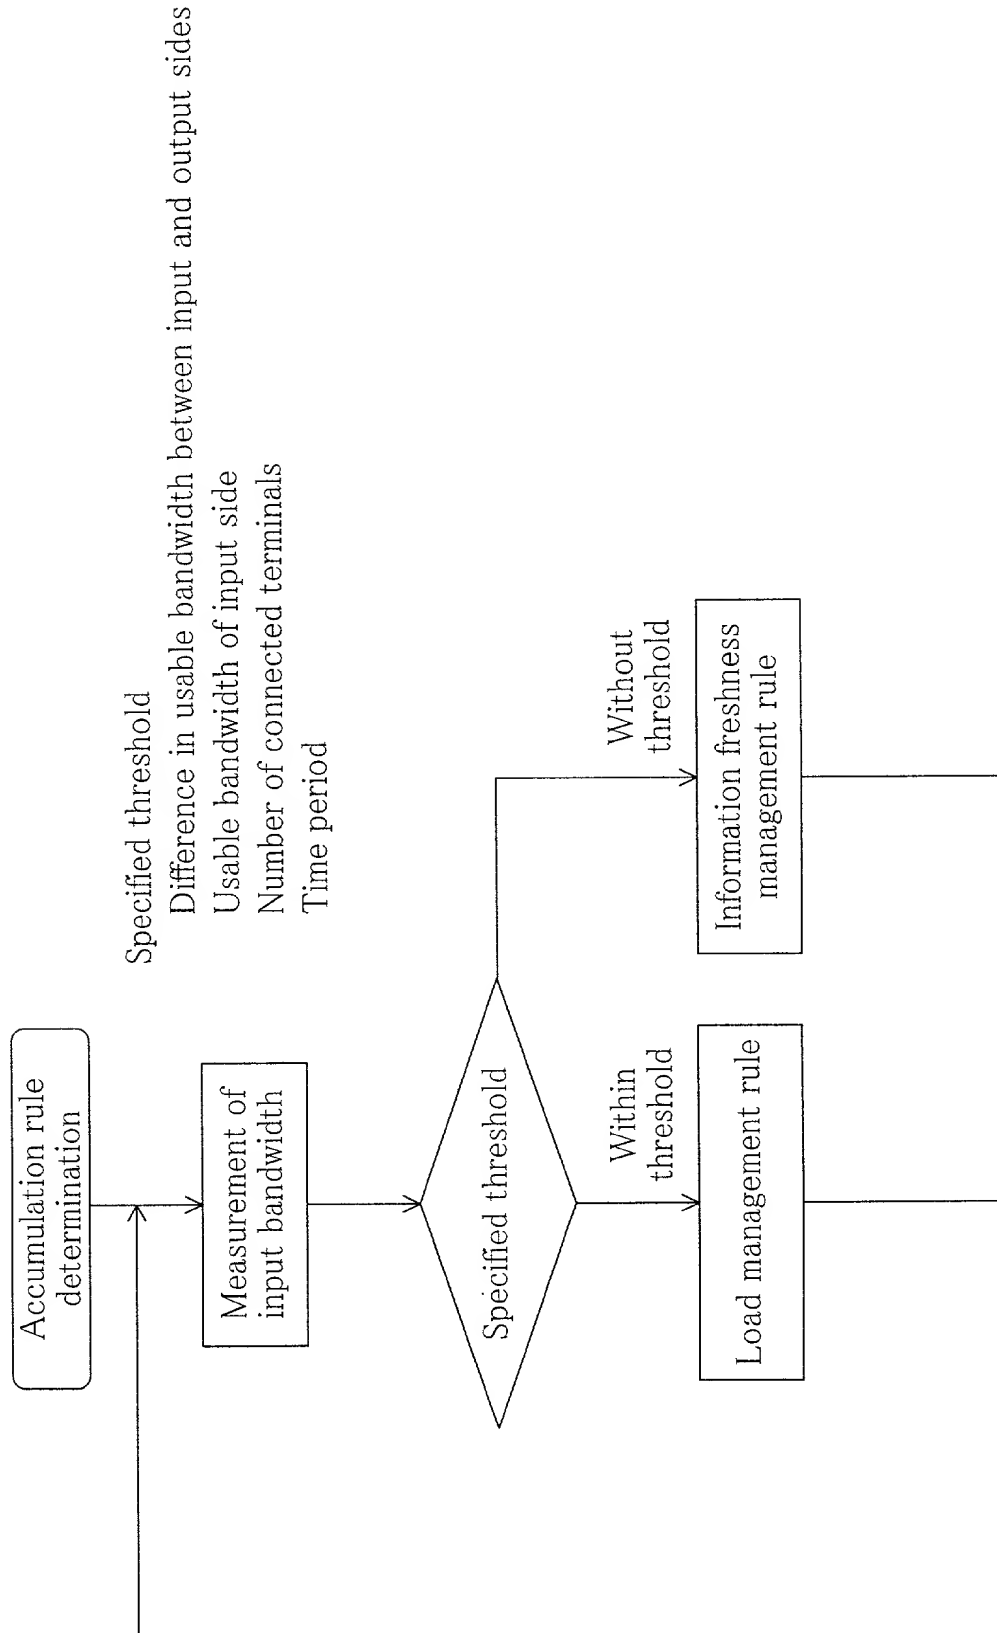


Fig. 9

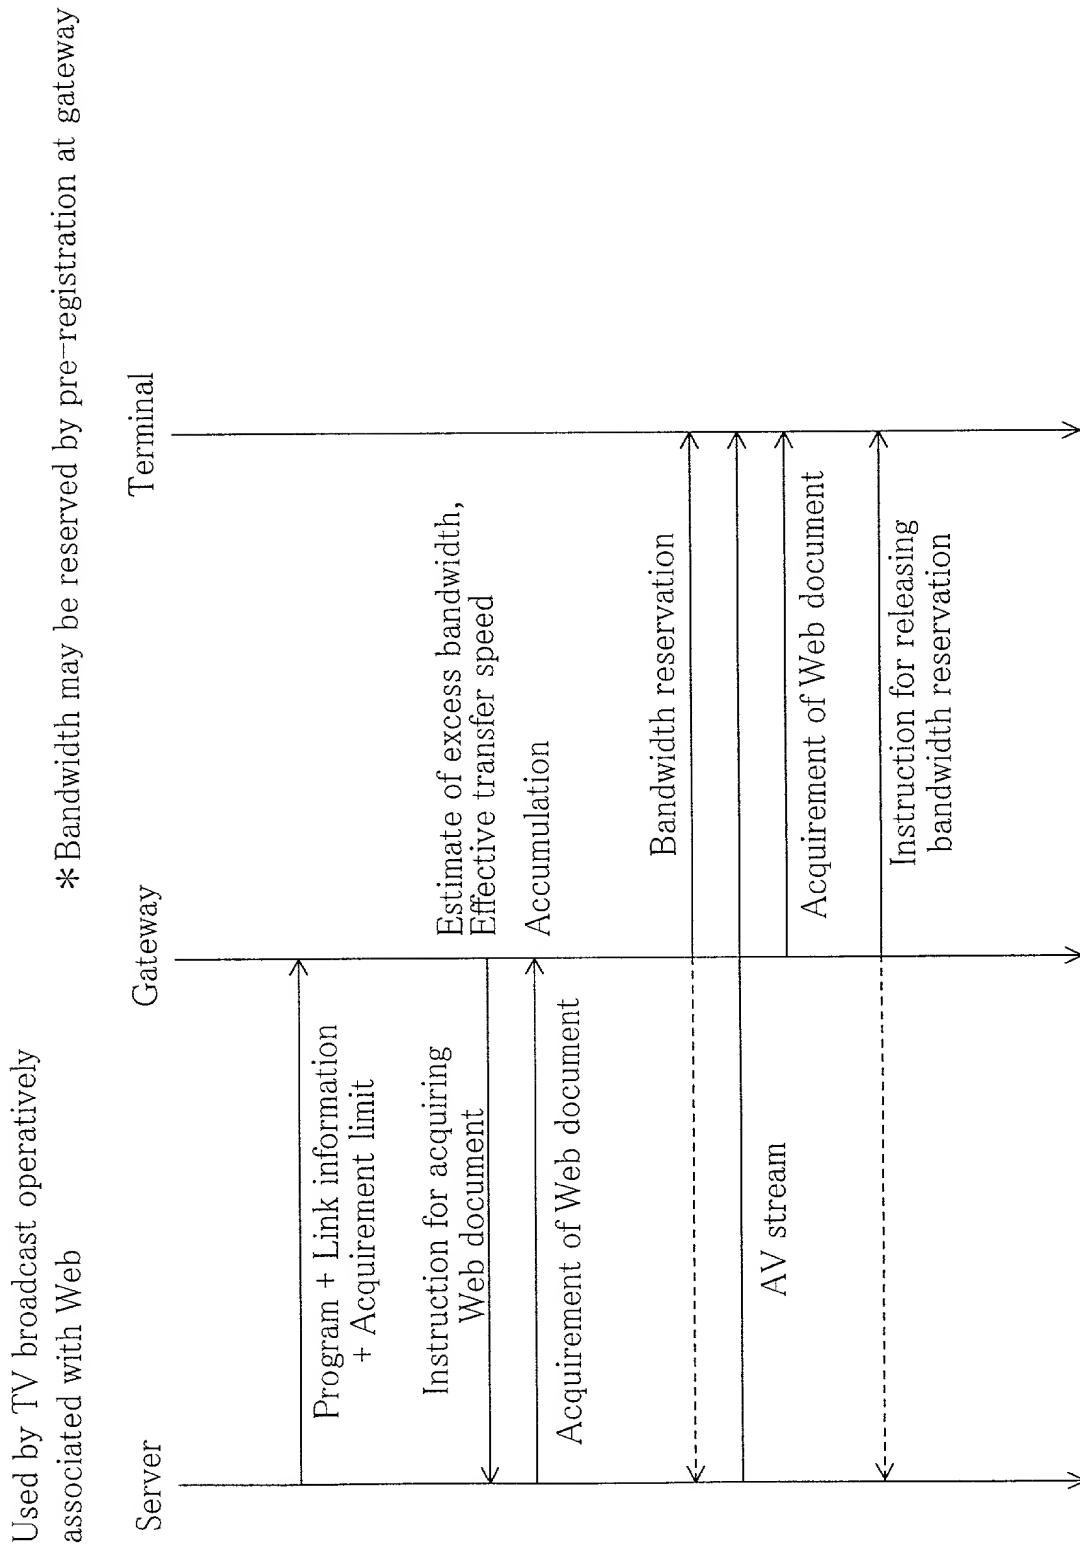

10/44


Fig. 10

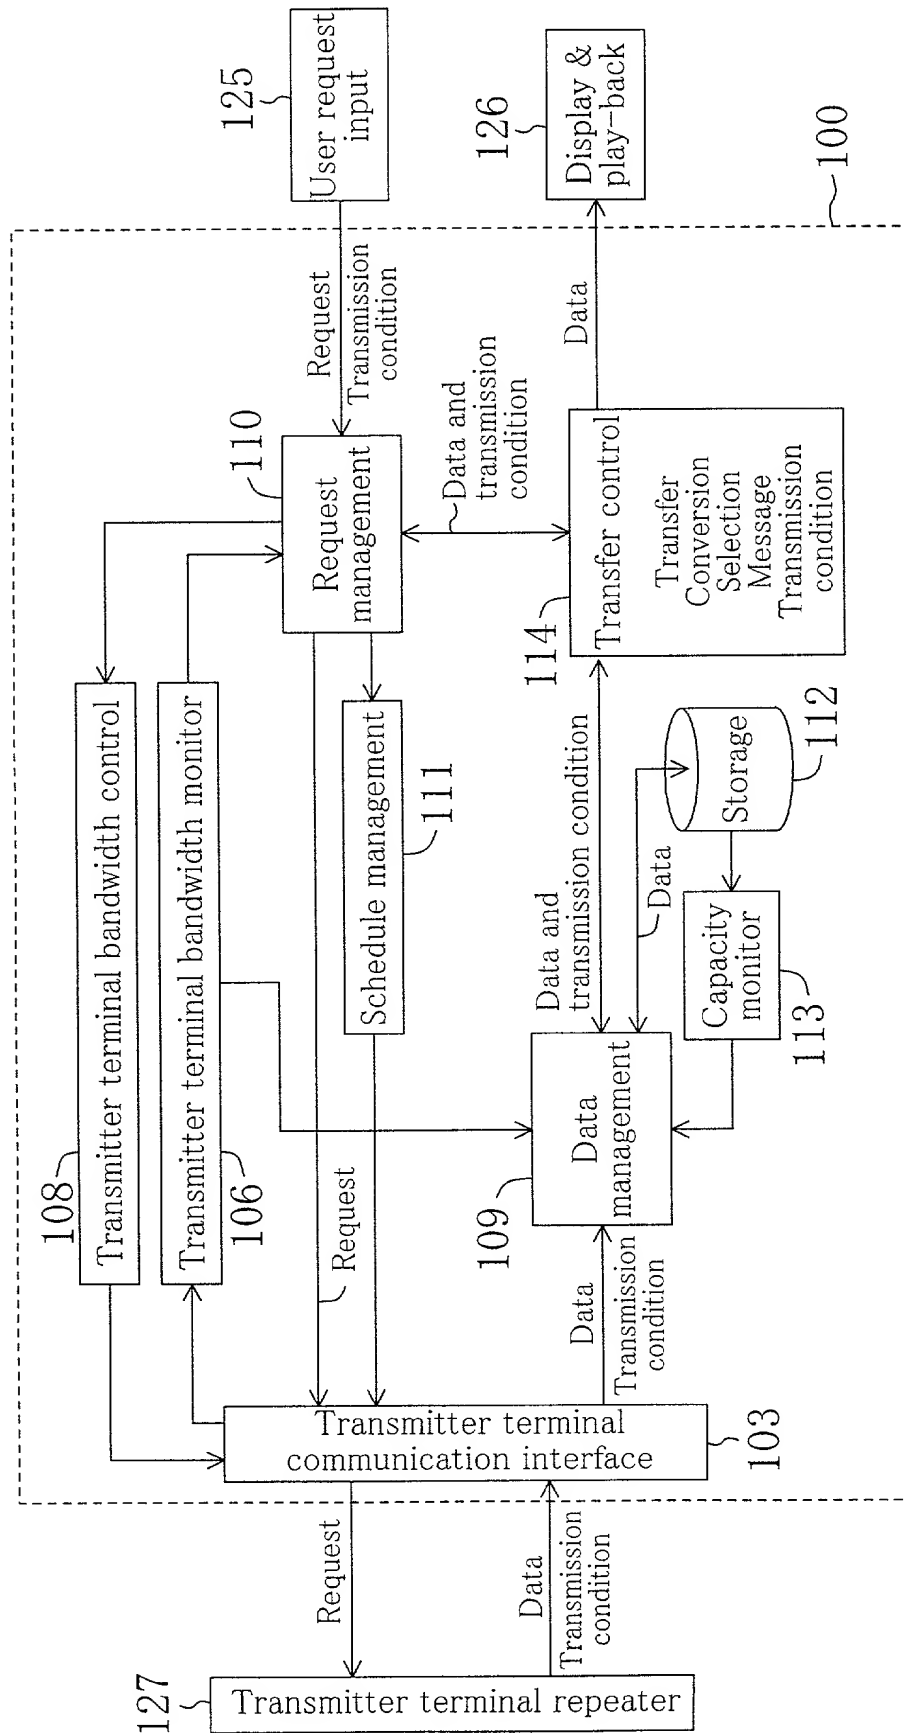

11/44

Fig. 11

Used by TV broadcast operatively associated with Web

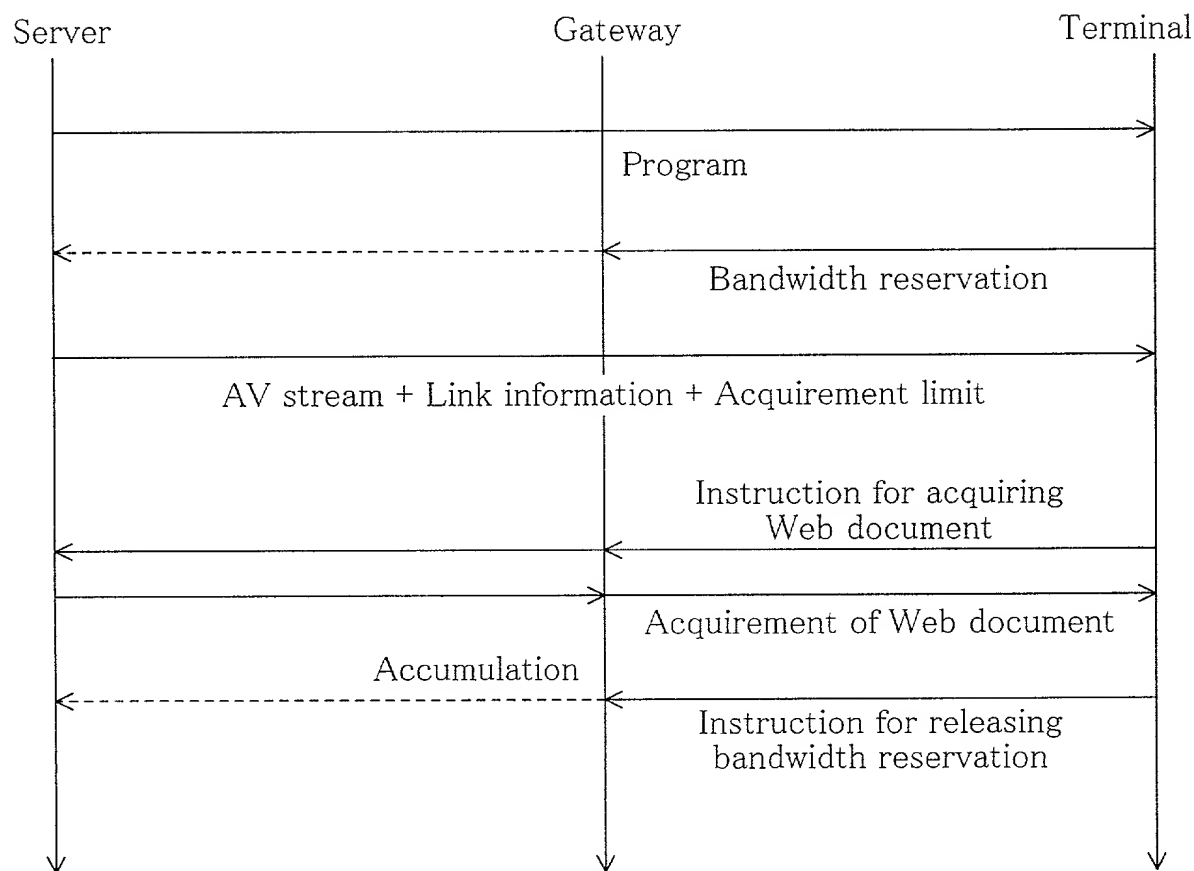

09/869664-0001



12/44

Fig. 12

AV play-back service operatively associated with location and direction


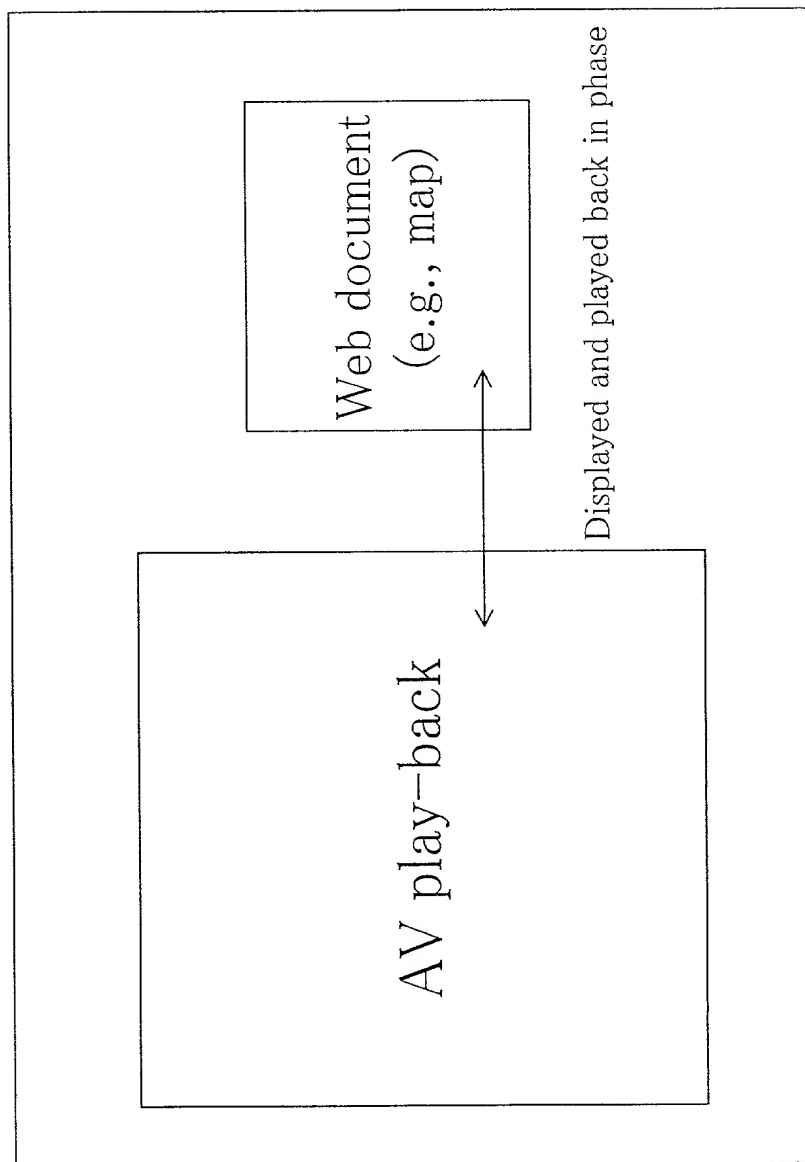


Fig. 13

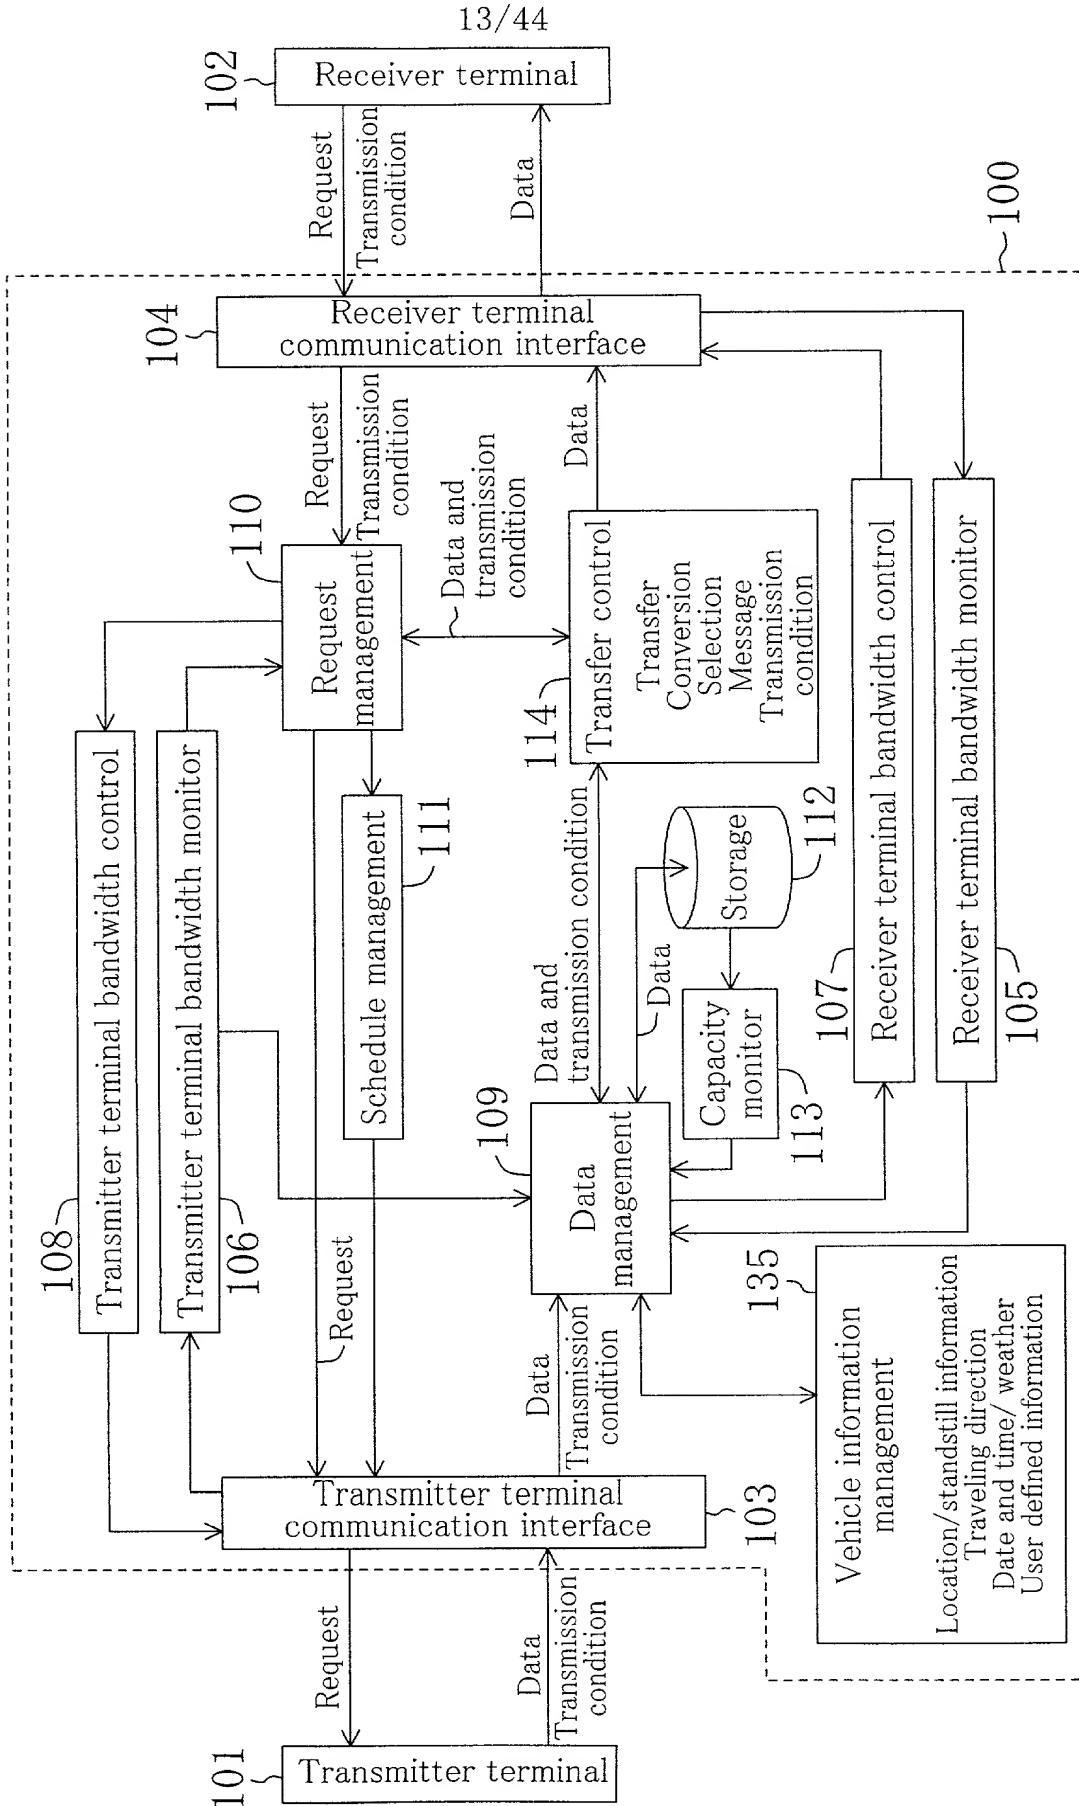

14/44

Fig. 14

Application to AV play-back service operatively  
 associated with location/direction

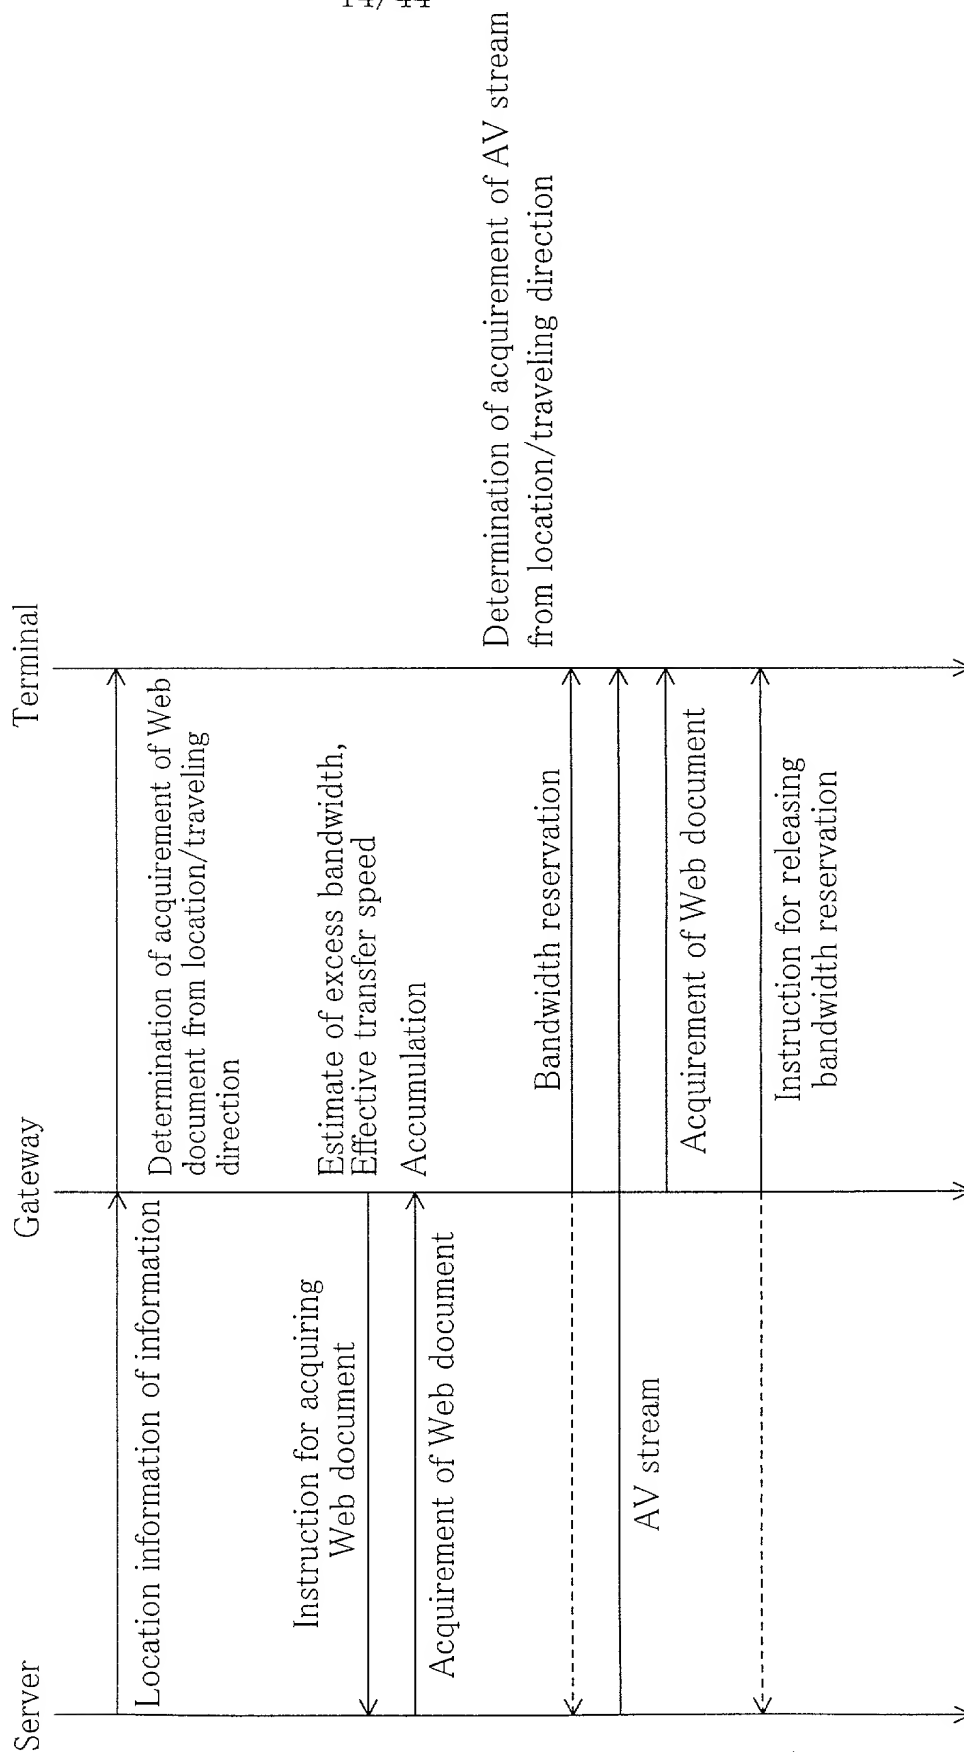


Fig. 15

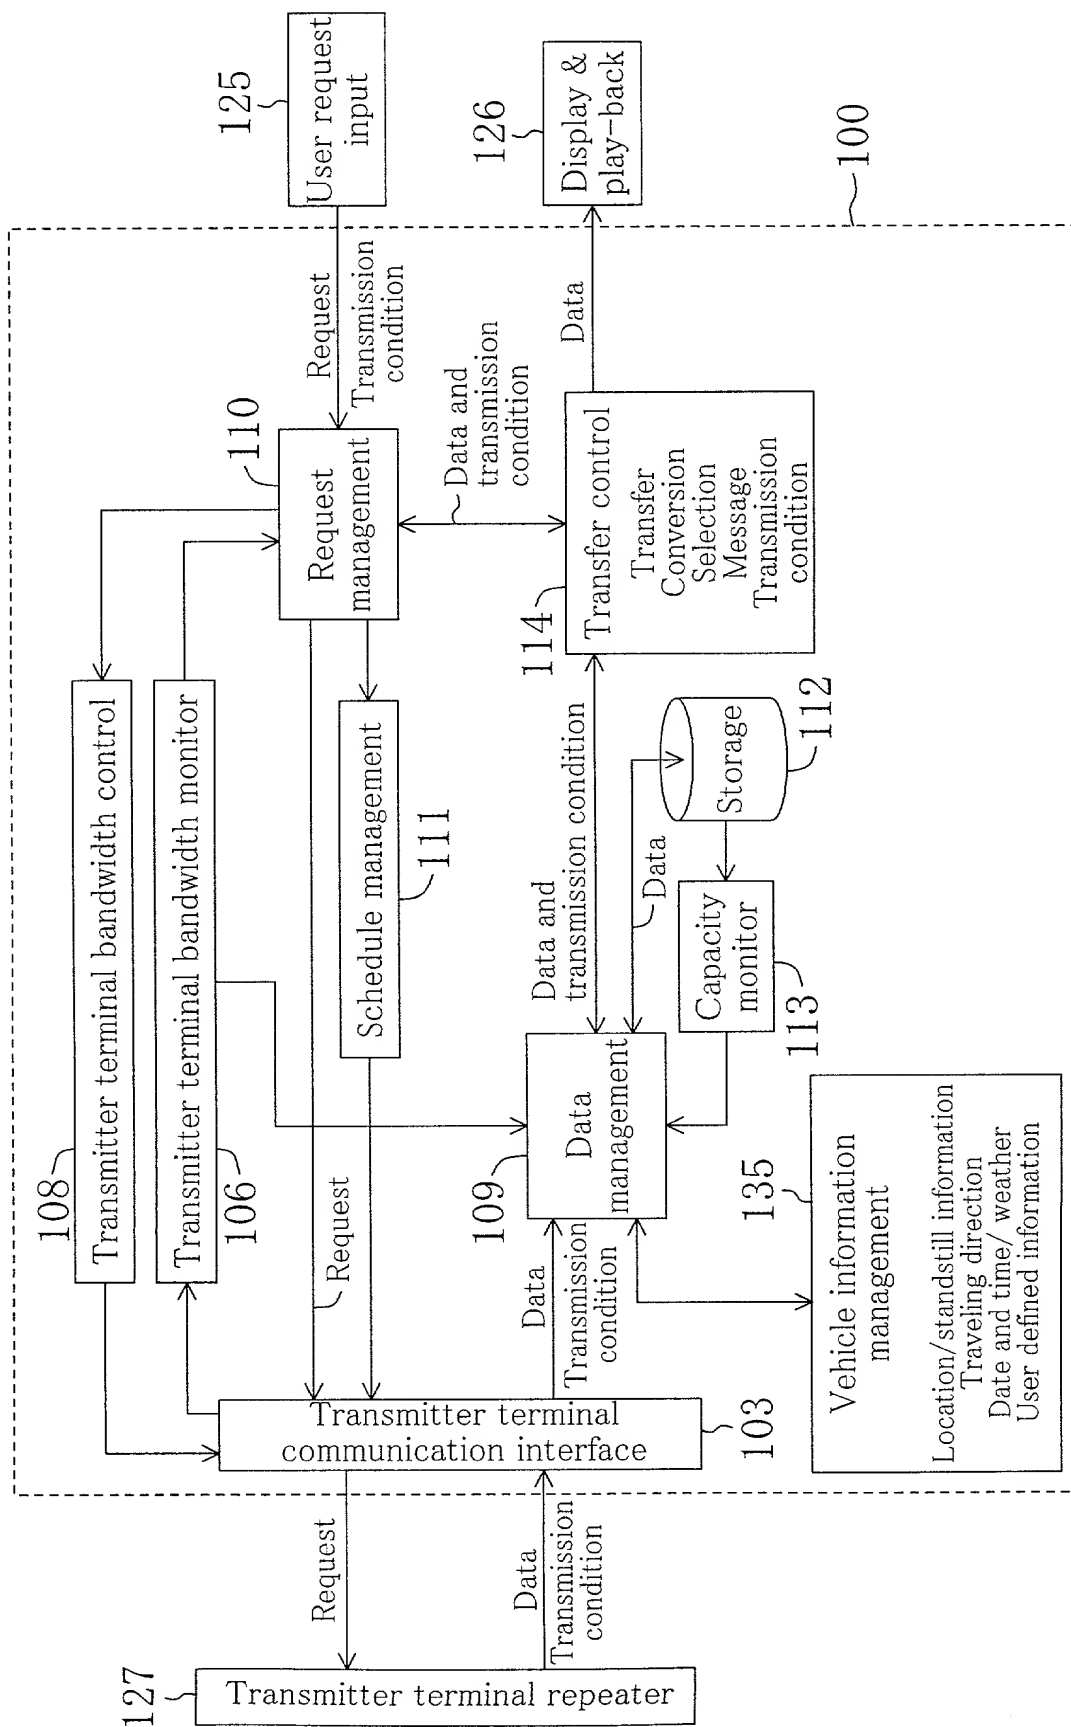


Fig. 16

Application to AV play-back service operatively associated with location/direction

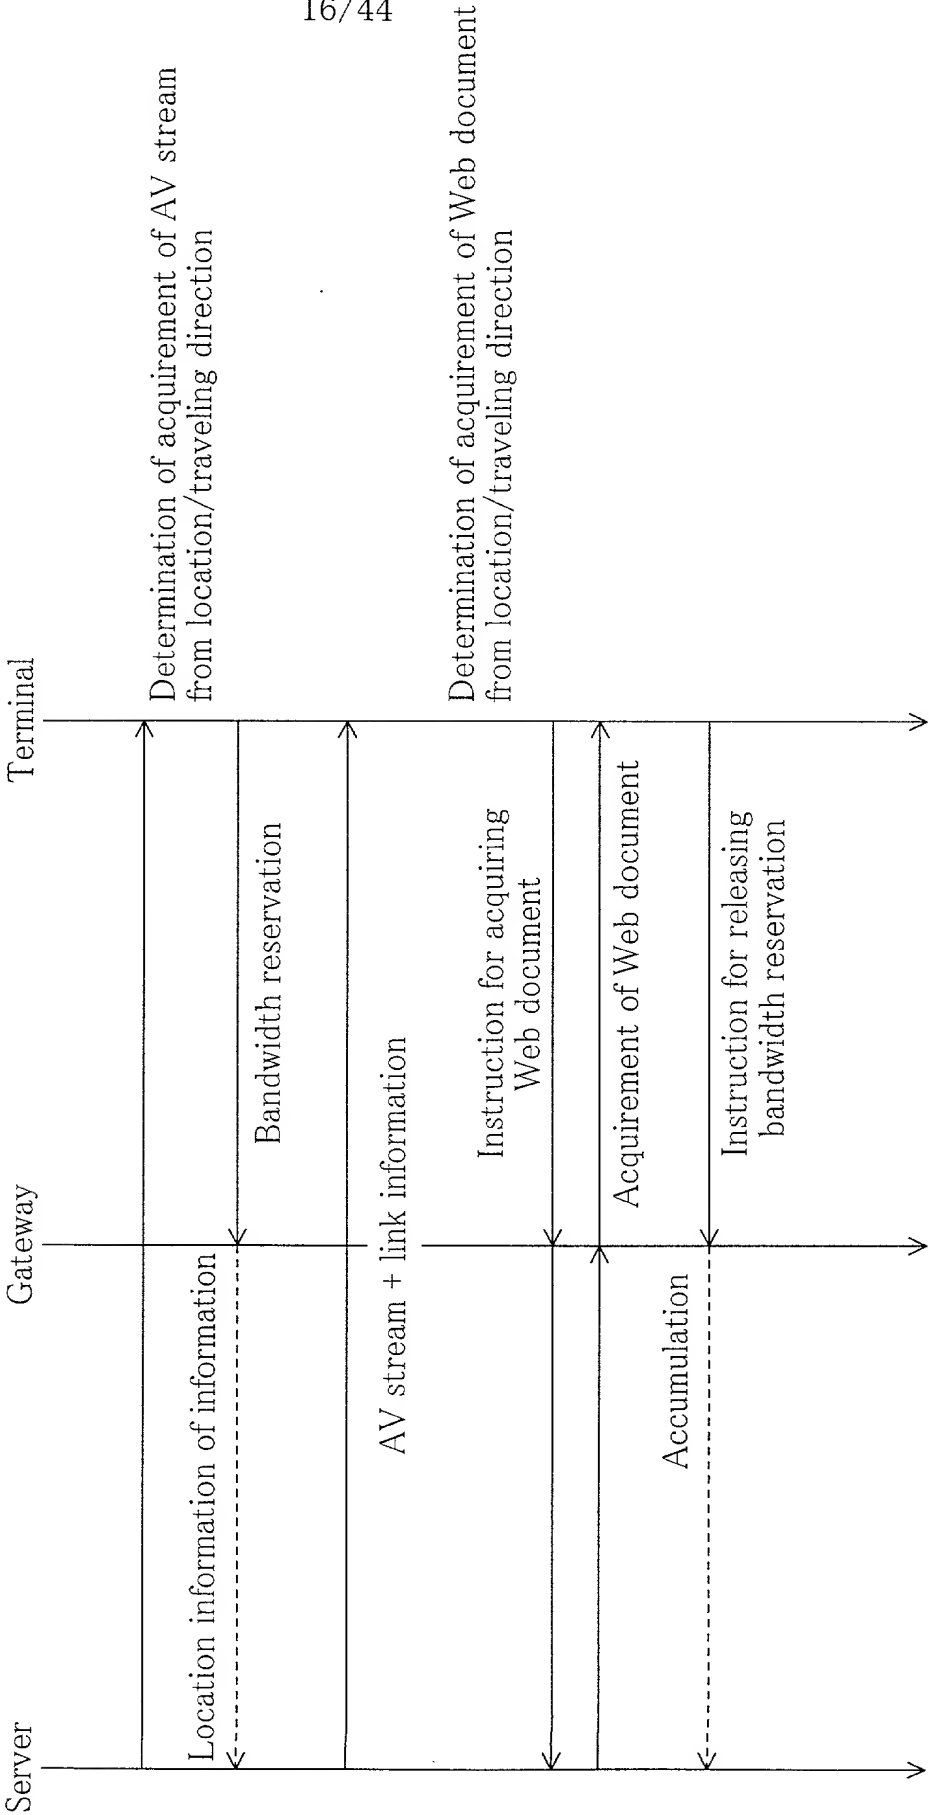


Fig. 17

Independent request for Web document and  
AV stream transmission

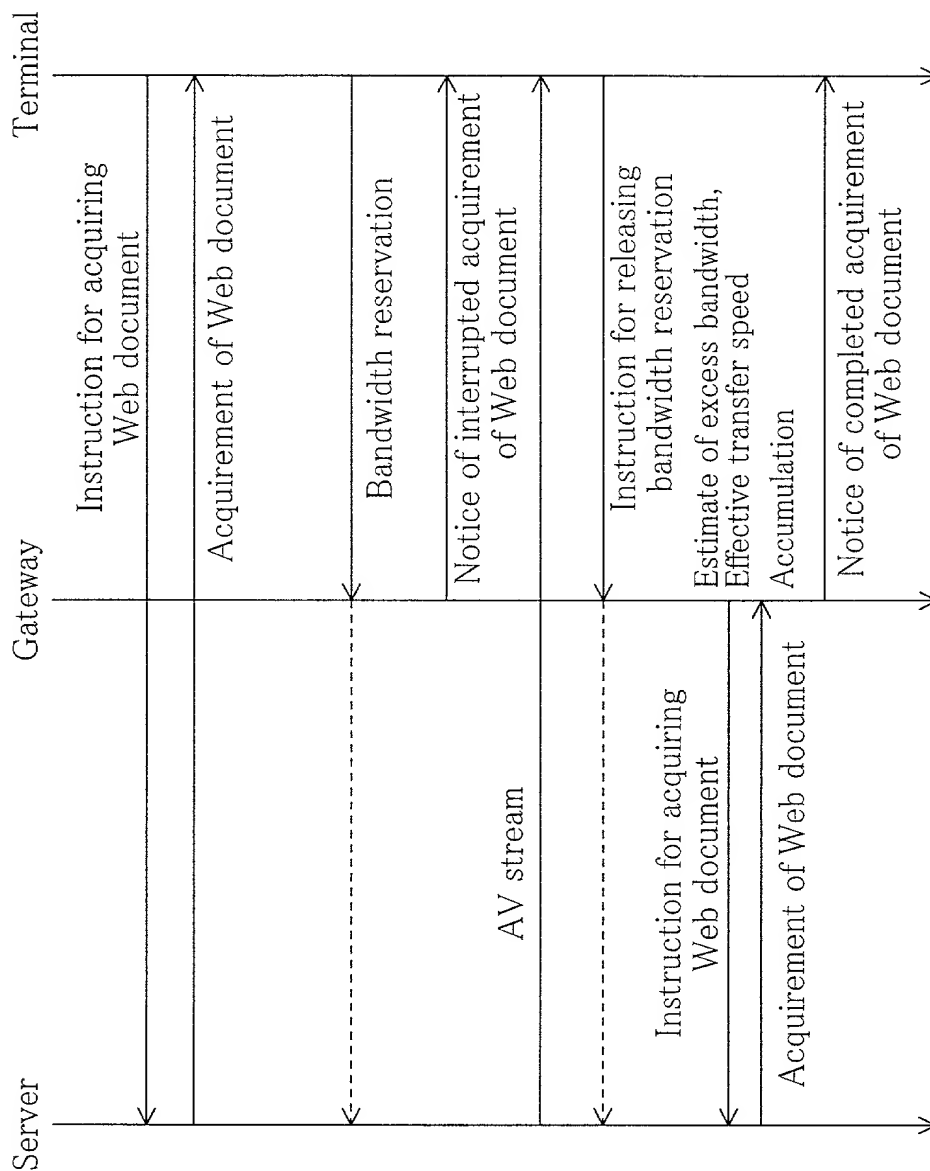


Fig. 18

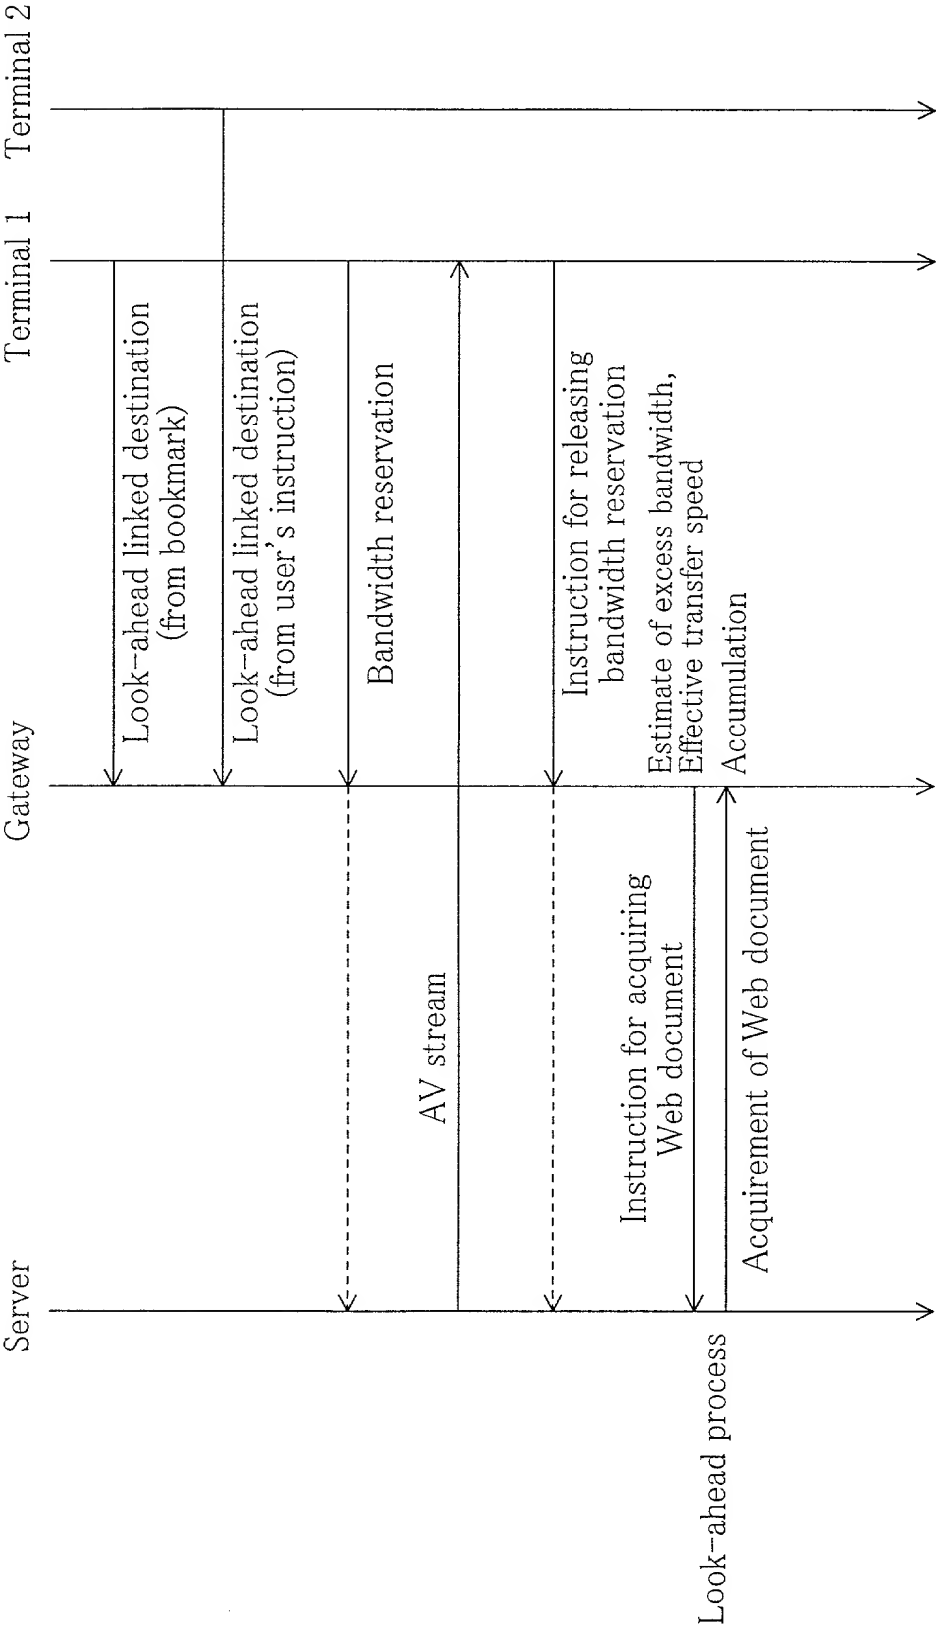


Fig. 19


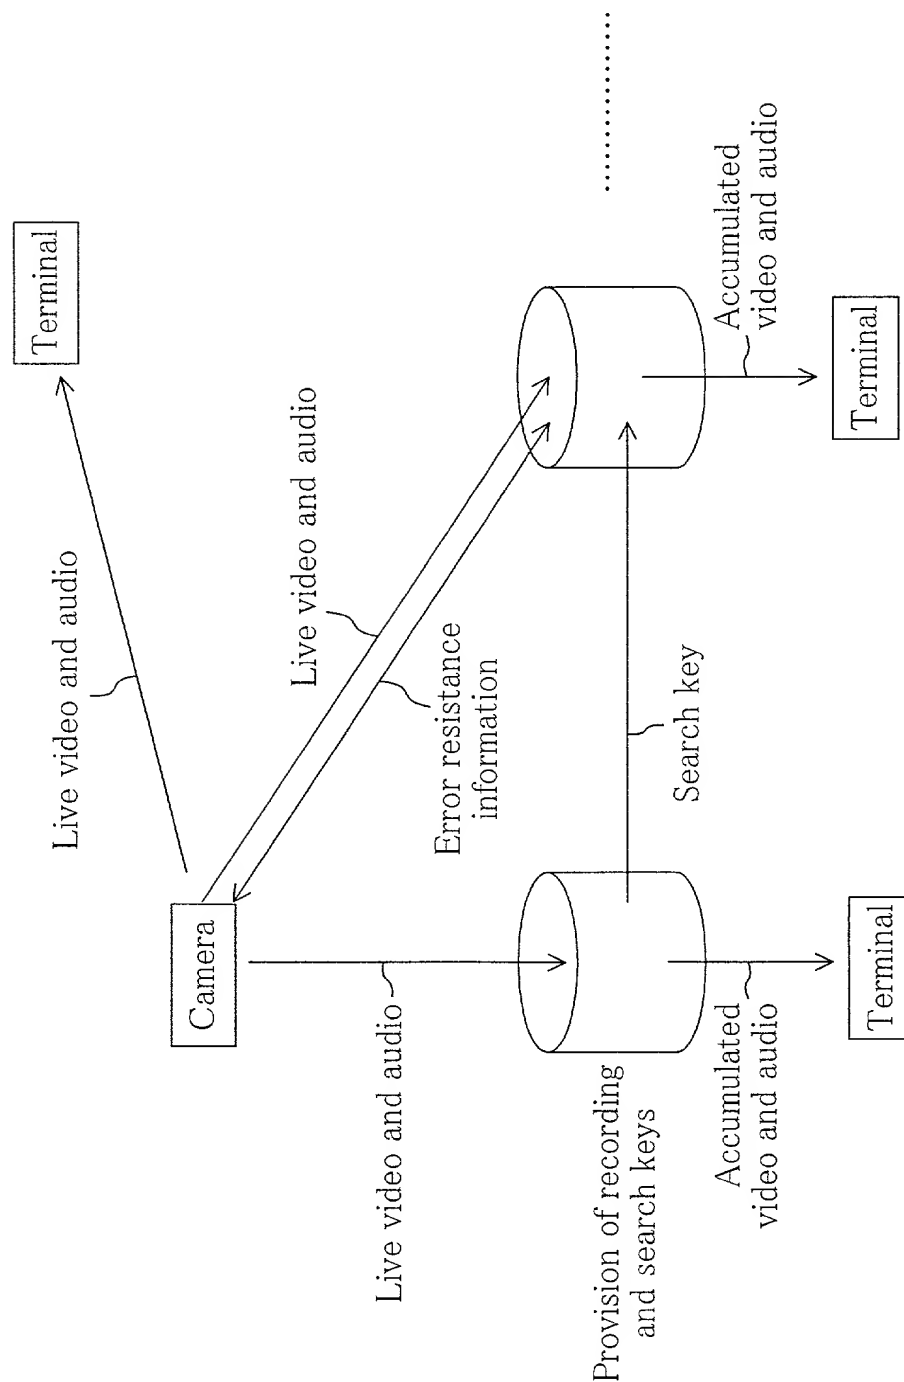




Fig. 20

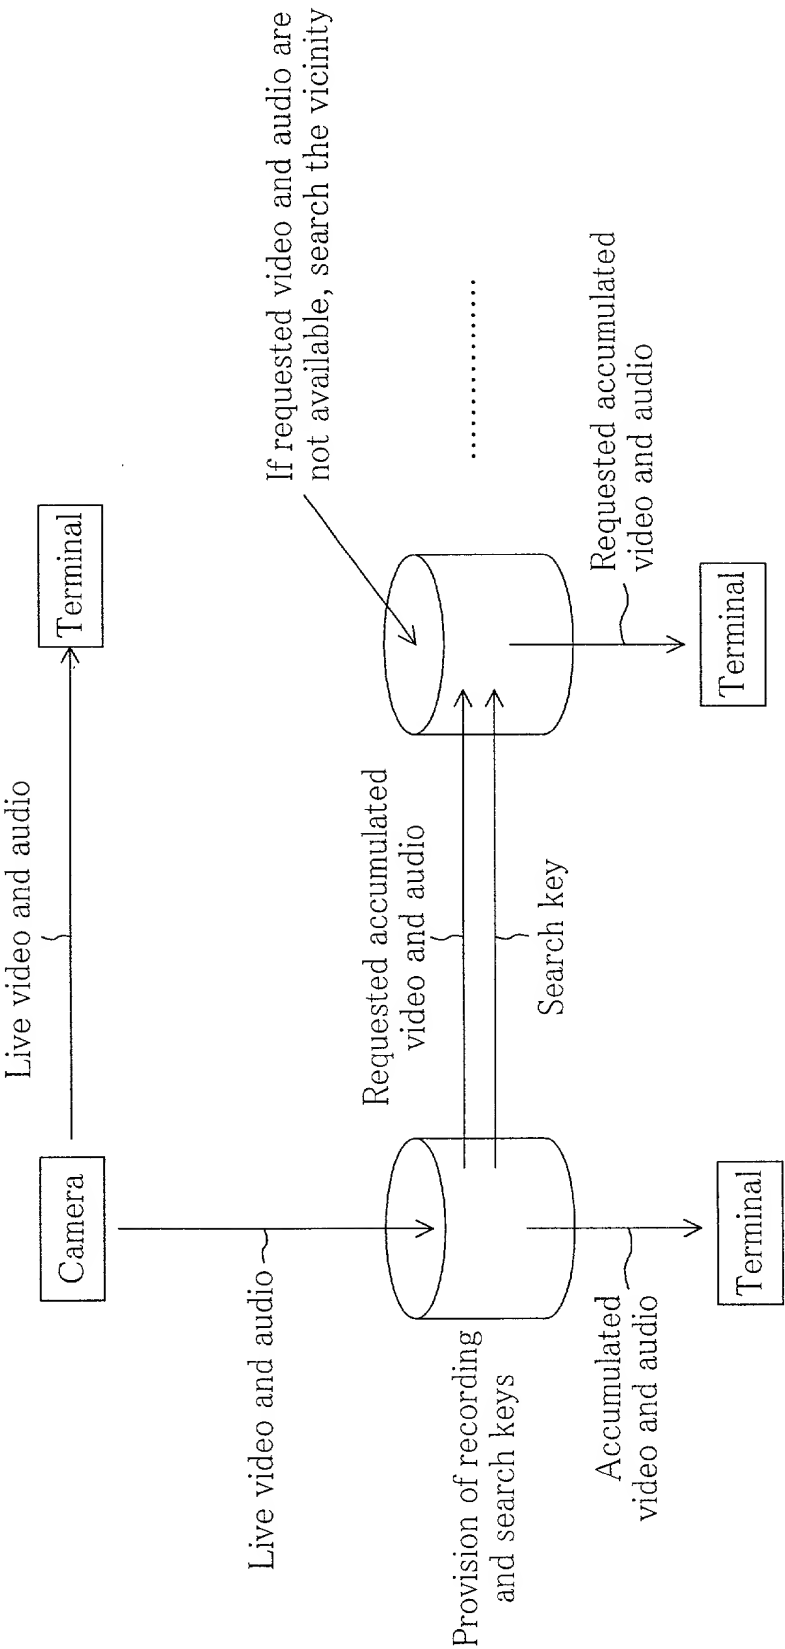

21/44

Fig. 21

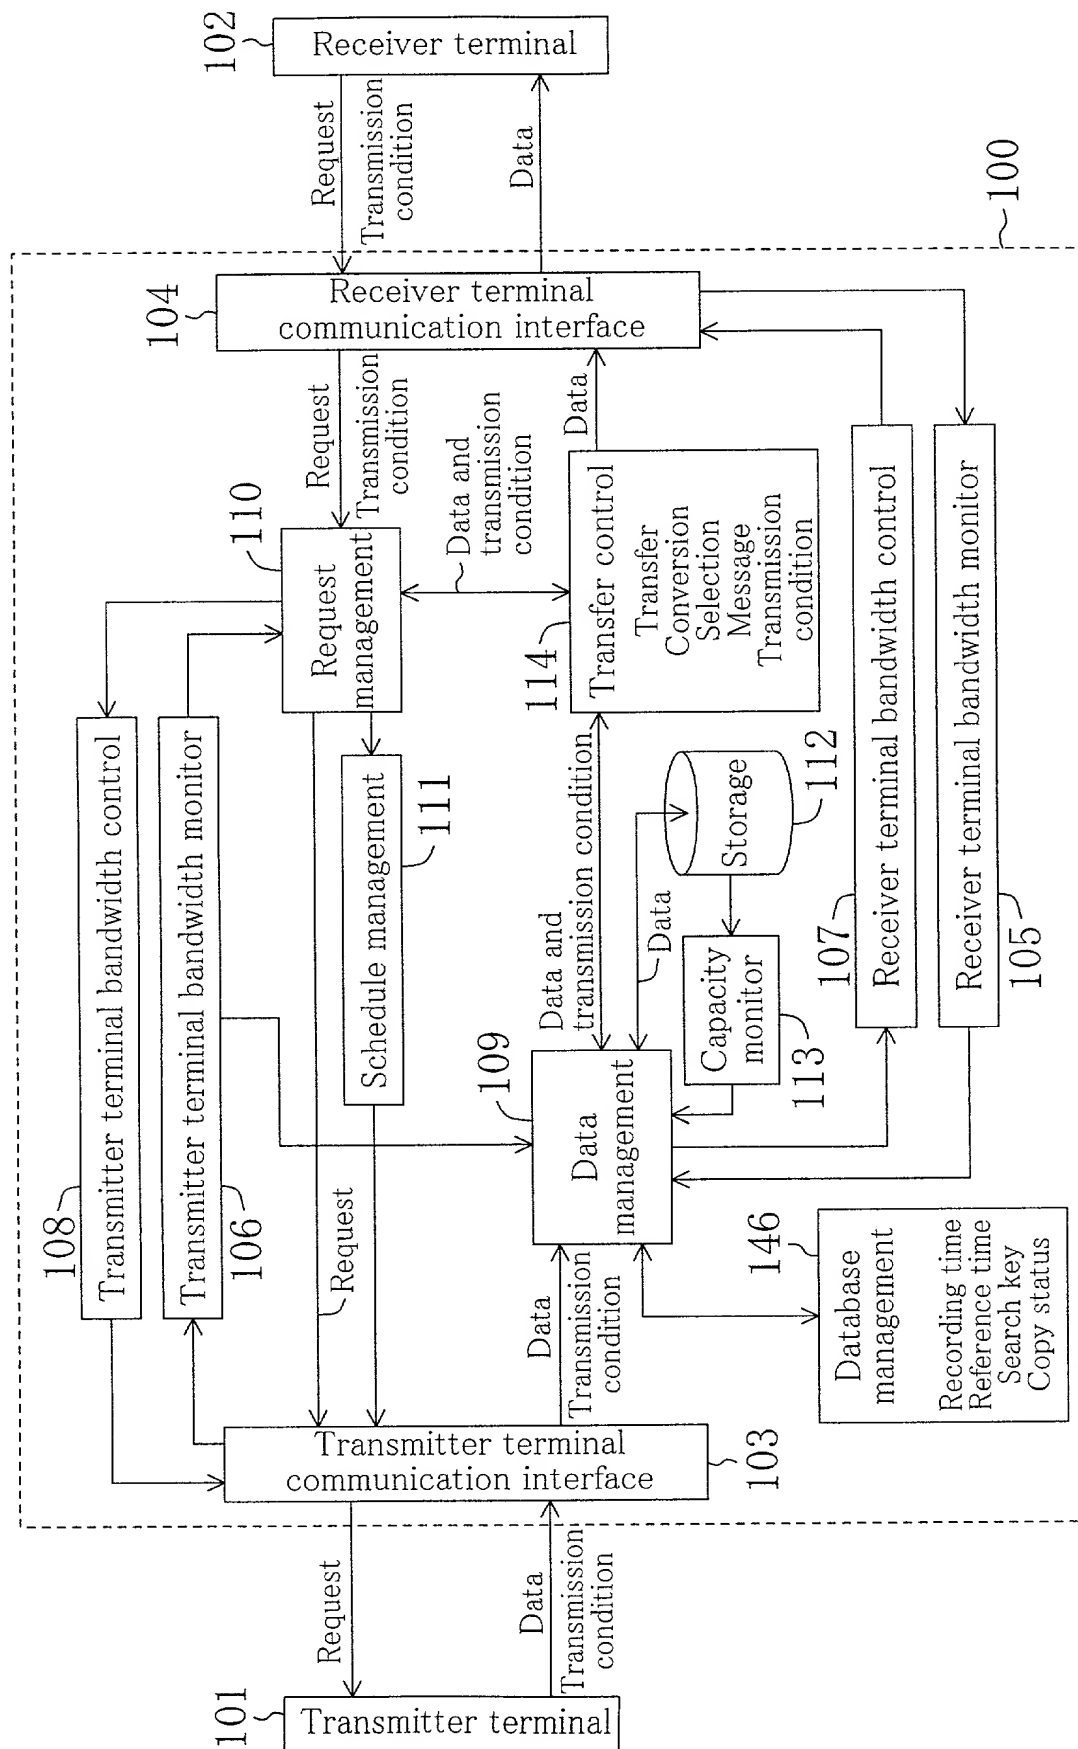


Fig. 22


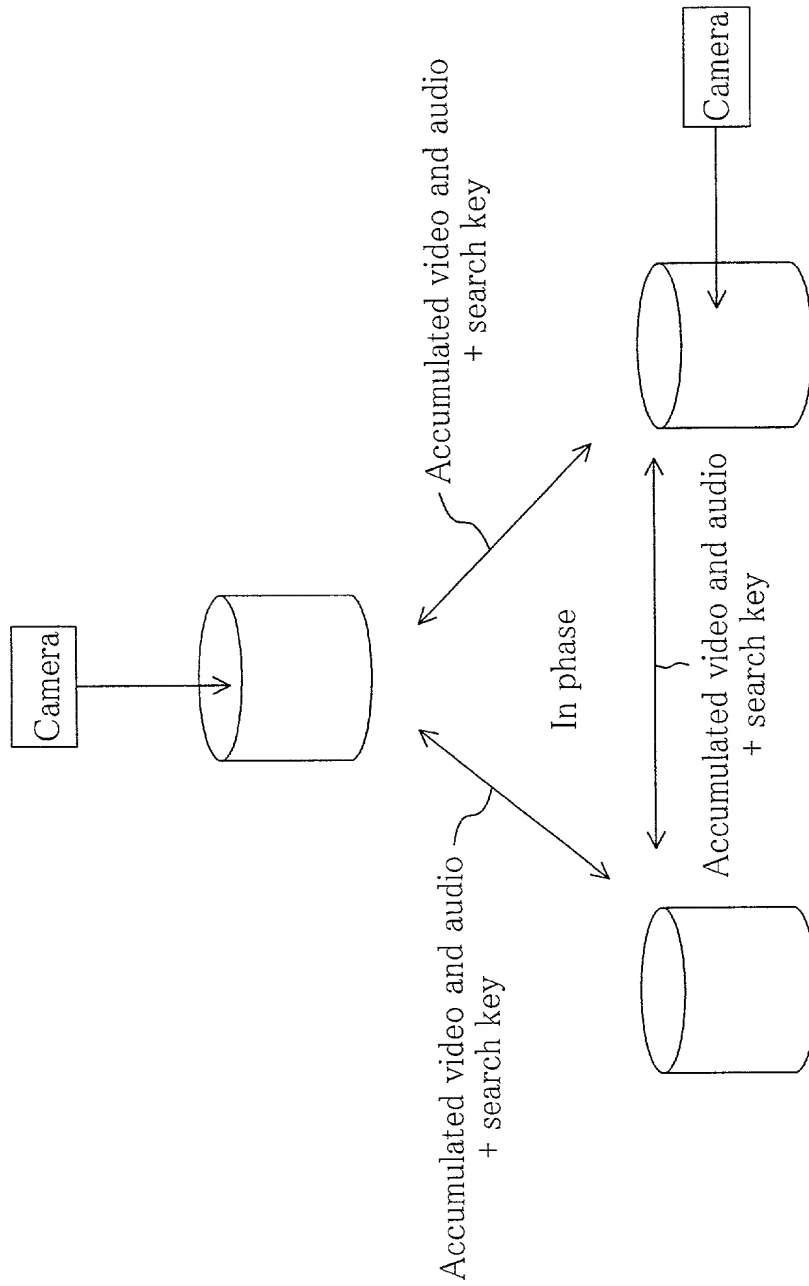


Fig. 23



24/44


Fig. 24

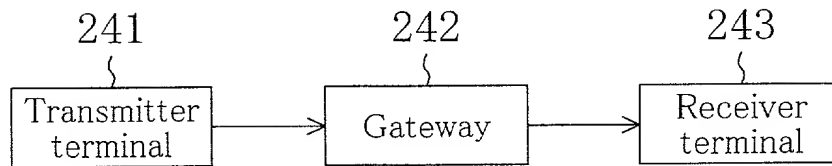

09/869664

25/44

Fig. 25

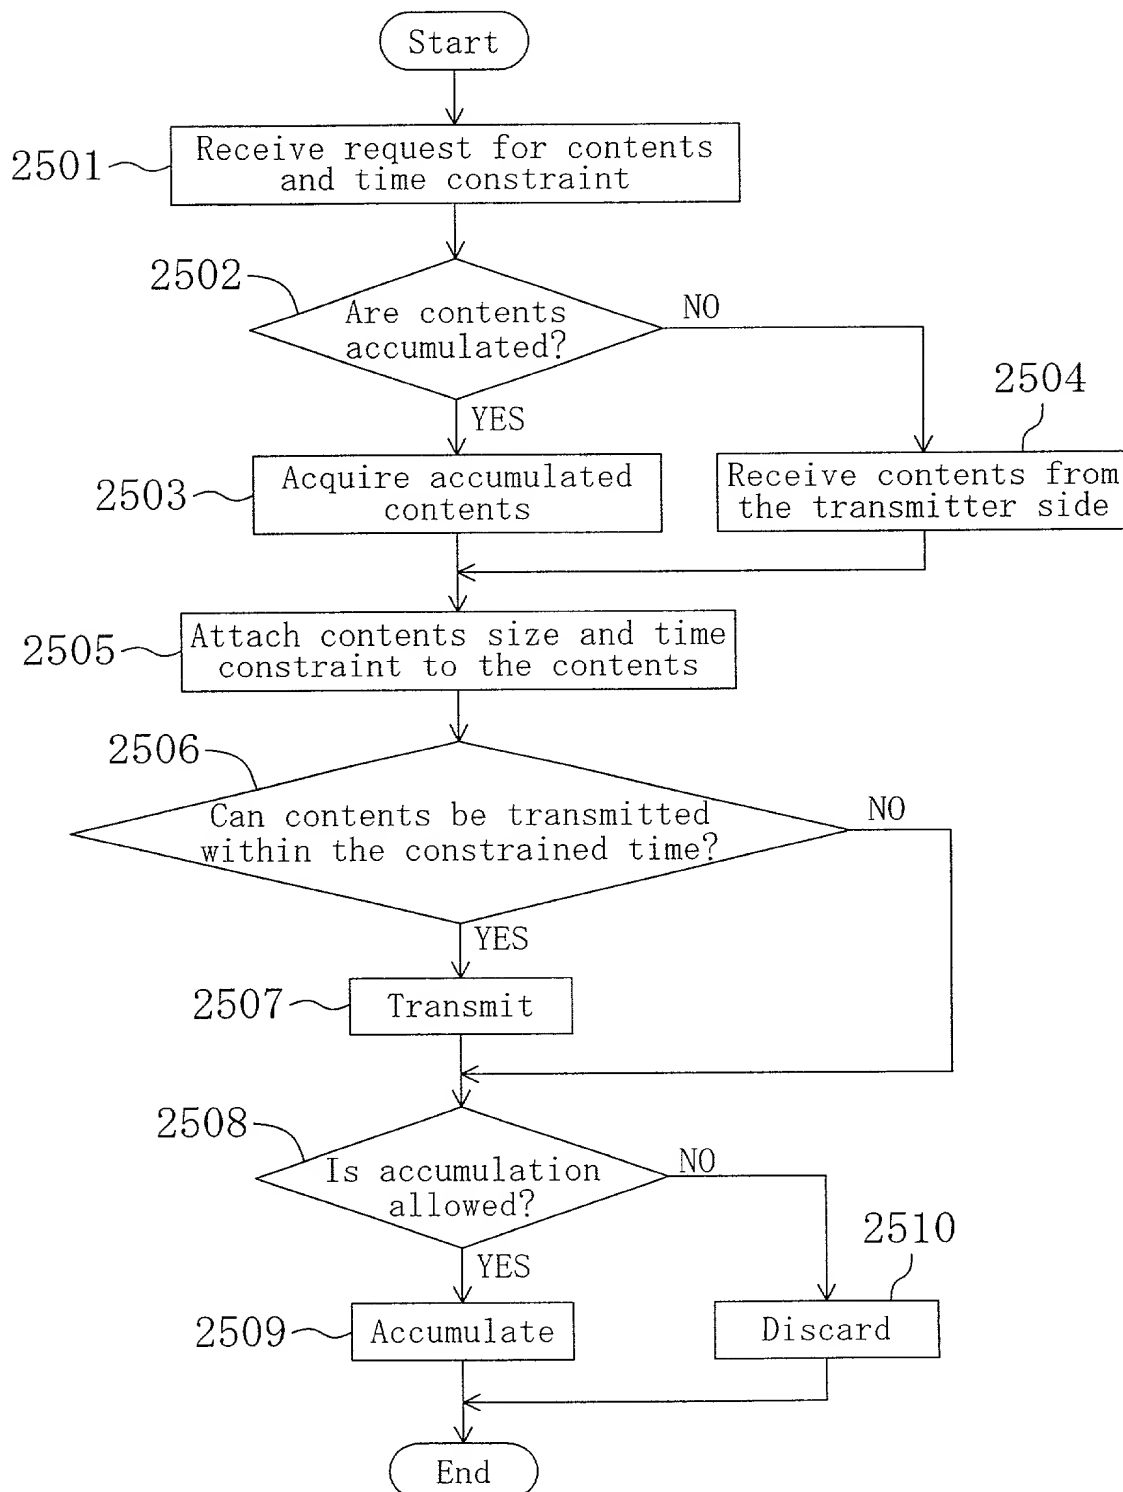

26/44


Fig. 26

GET/temp/test.jpg HTTP/1.1  
Host:gateway  
Time-Restriction:20

09/869664

27/44

Fig. 27

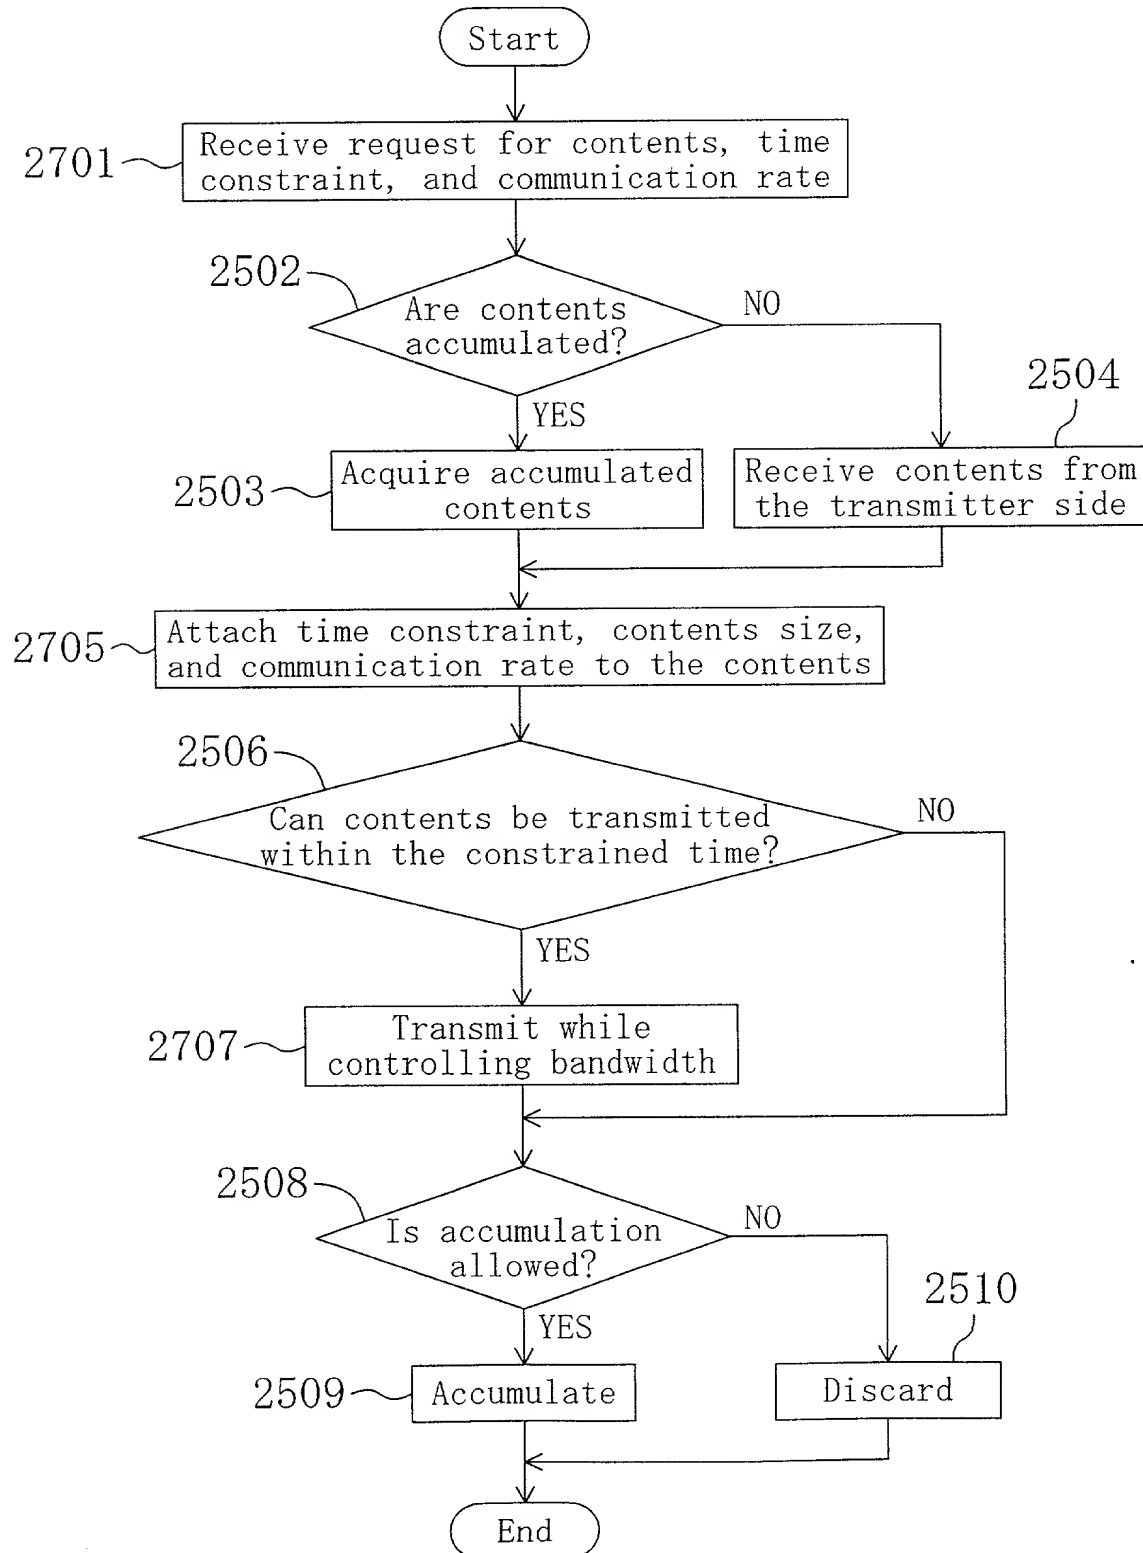



28/44

## Fig. 28

GET/temp/test.jpg HTTP/1.1  
Host:gateway  
Band-Width:64k

## Fig. 29

GET/temp/test.html HTTP/1.1  
Host:gateway  
Priority:5


GET/temp/test1.jpg HTTP/1.1  
Host:gateway  
Priority:3

GET/temp/test2.jpg HTTP/1.1  
Host:gateway  
Priority:4

09869664-062801

29/44

Fig. 30

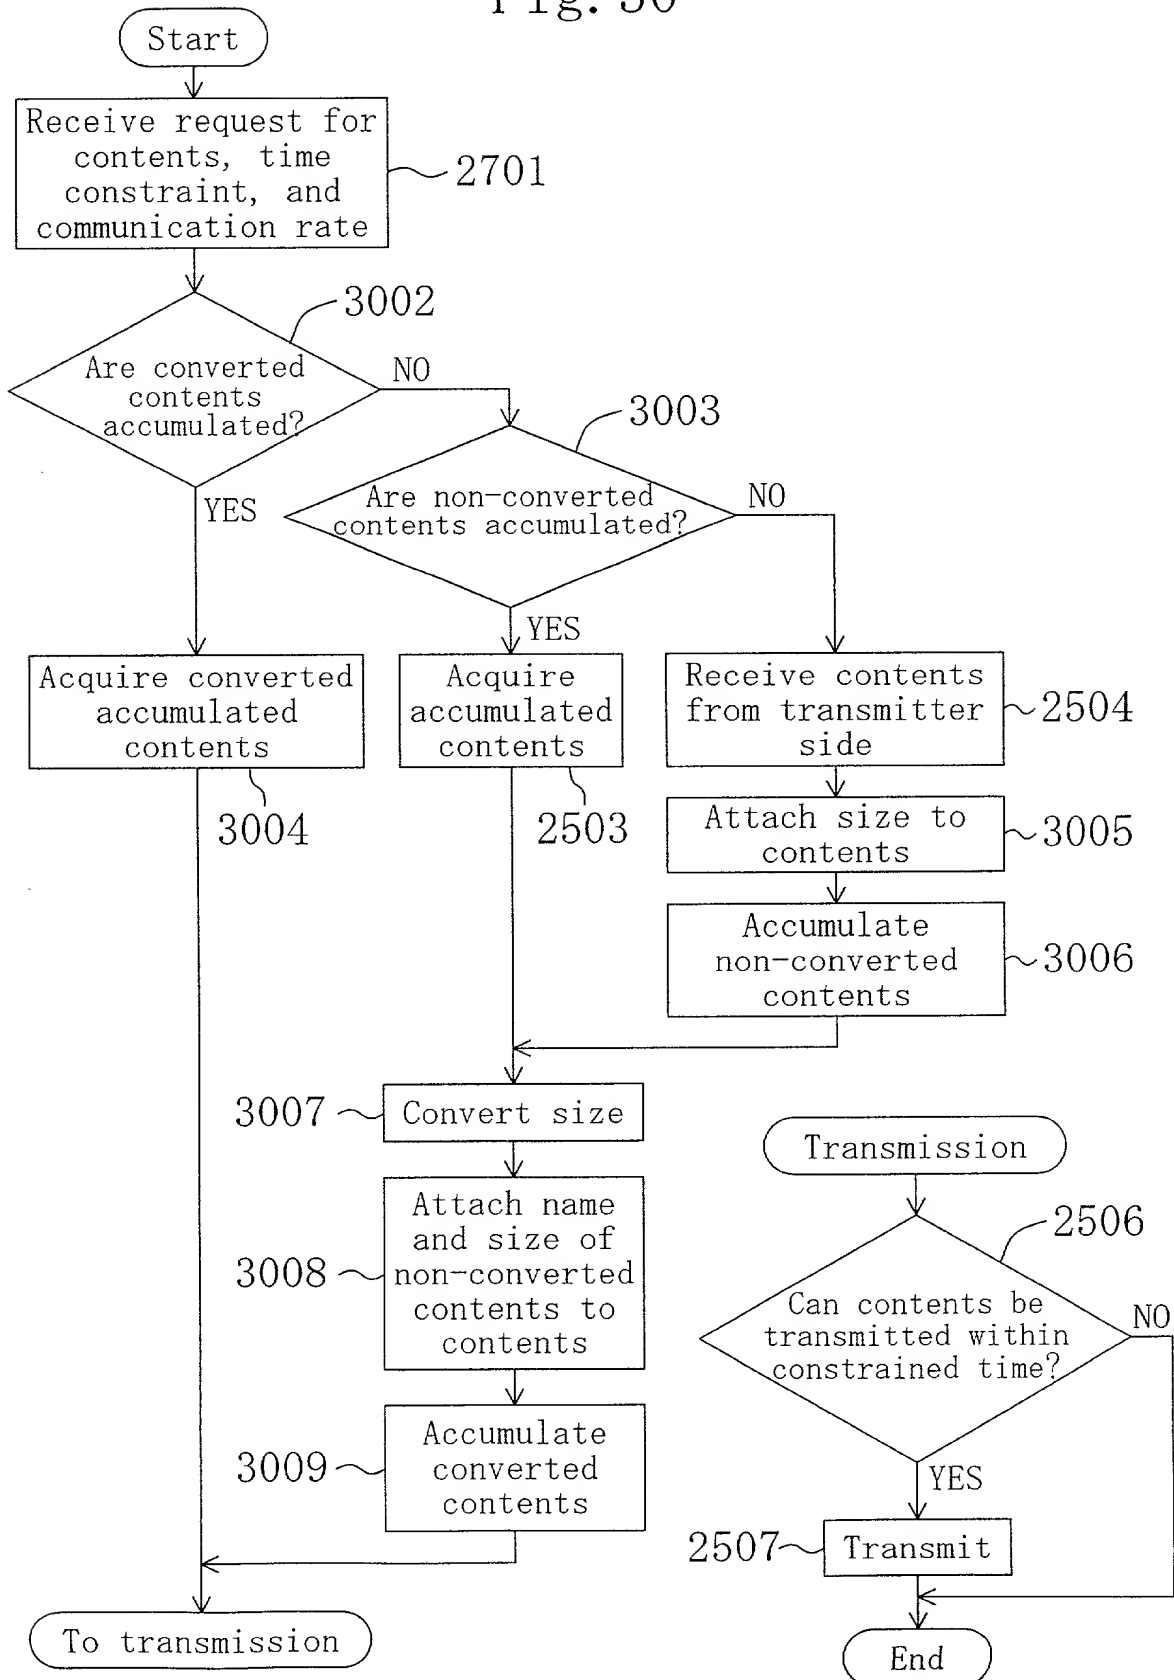

30/44

Fig. 31

GET/temp/test.html HTTP/1.1  
Host:gateway  
Terminal-Width:800  
Terminal-Height:600  
Color-Depth:16

Fig. 32


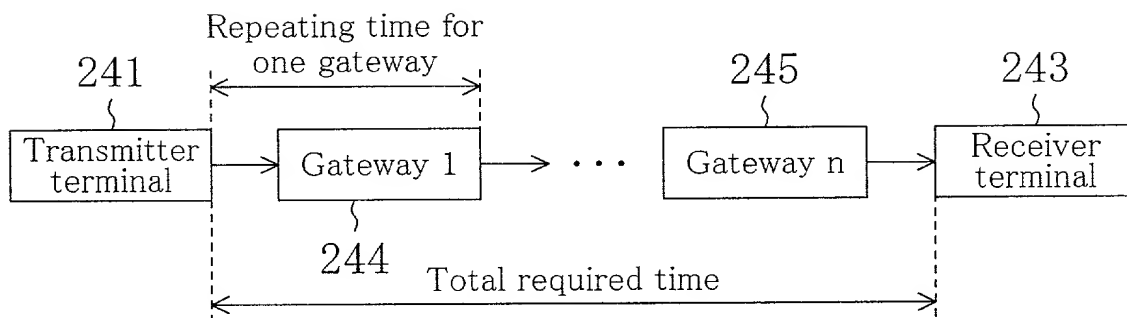


Fig. 33

GET/temp/test.jpg HTTP/1.1  
Host:gateway  
Time-Restriction:20  
Time-Restriction-per-Hop:5

31/44

Fig. 34

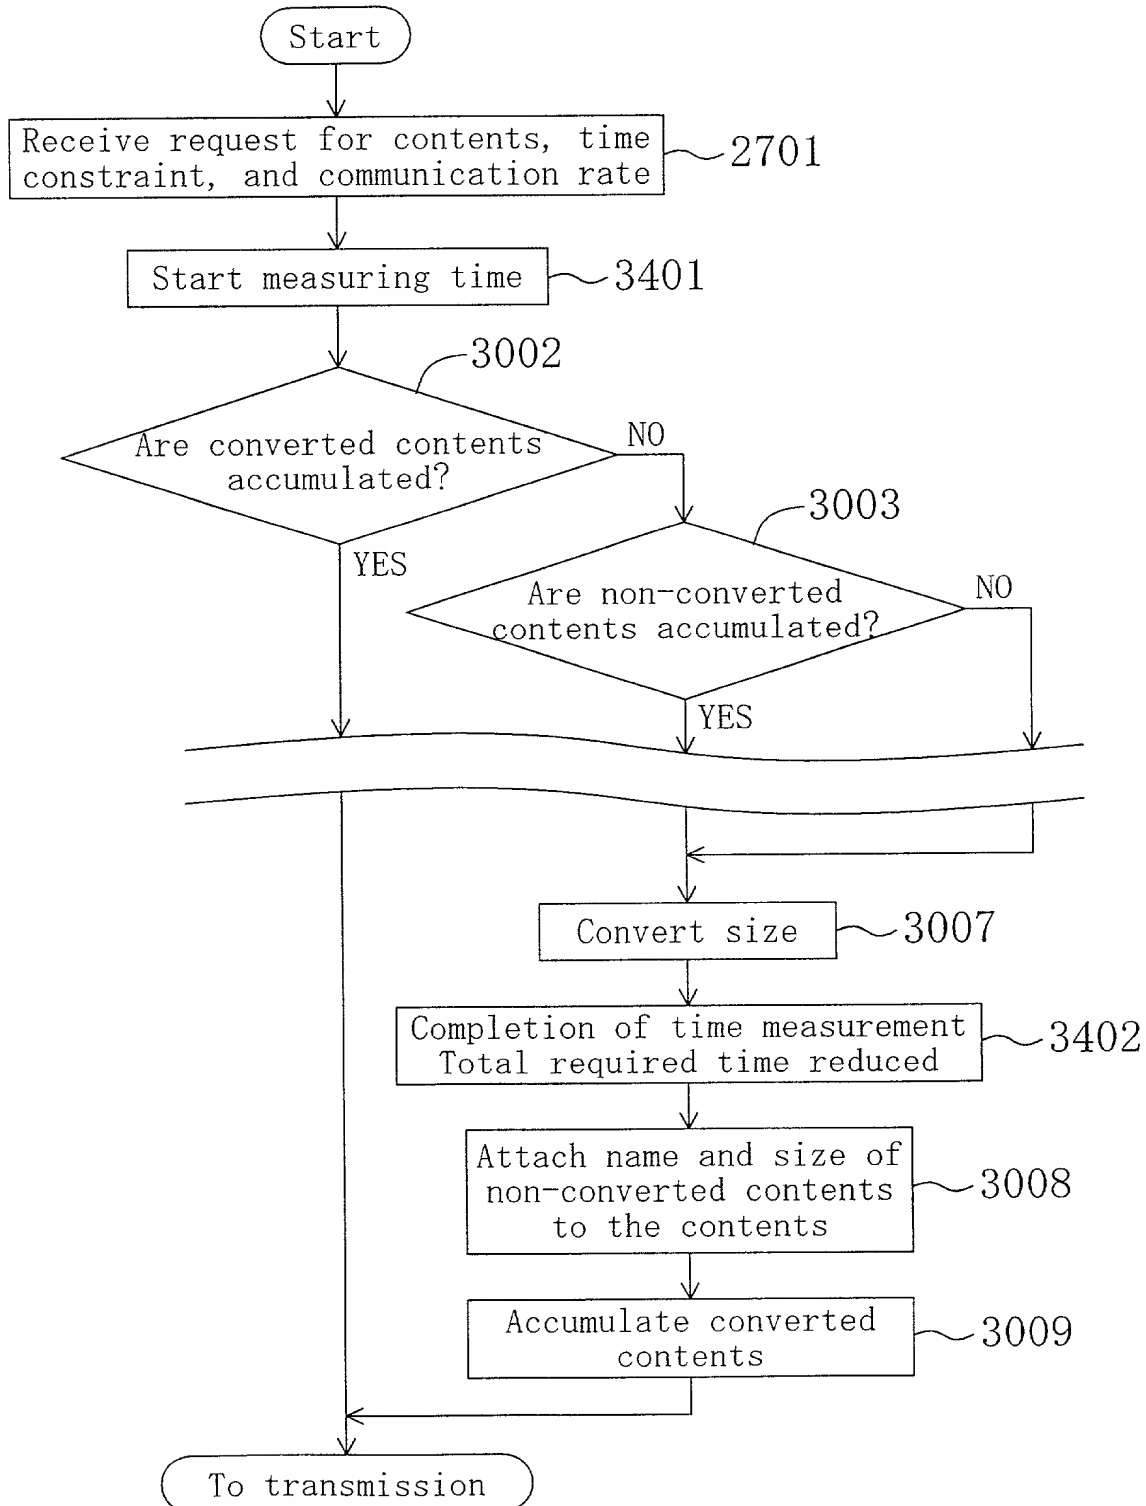


32/44

Fig. 35

HTTP/1.1 200 OK  
Access:254  
Date:Fri,17 Sep 1999 02:14:49 GMT  
Server:...  
:  
:

Fig. 36

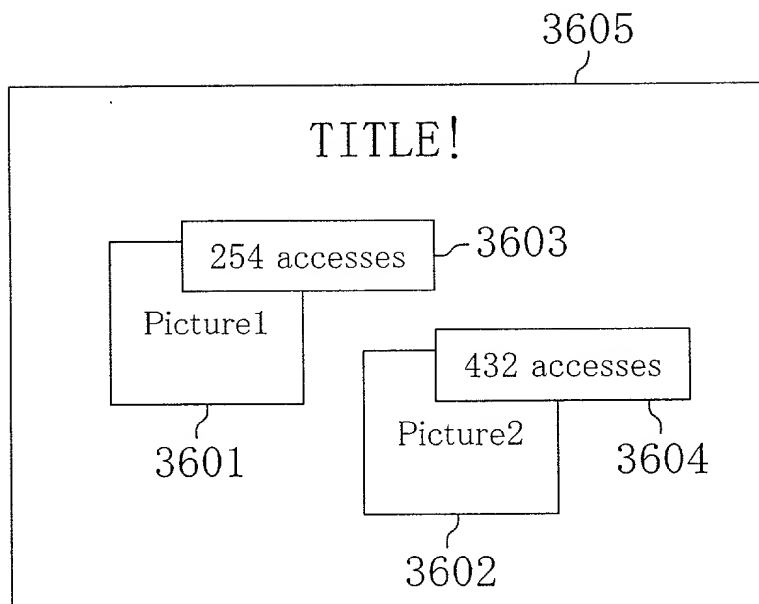

33/44

Fig. 37

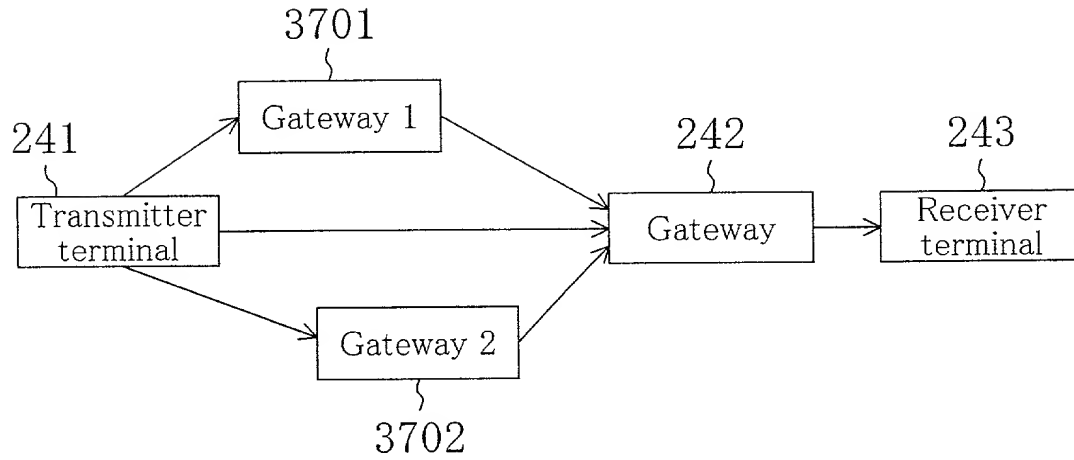


Fig. 38

HEAD/temp/test.jpg HTTP/1.1  
Host:gateway1  
Time-Restriction:20

34/44

Fig. 39



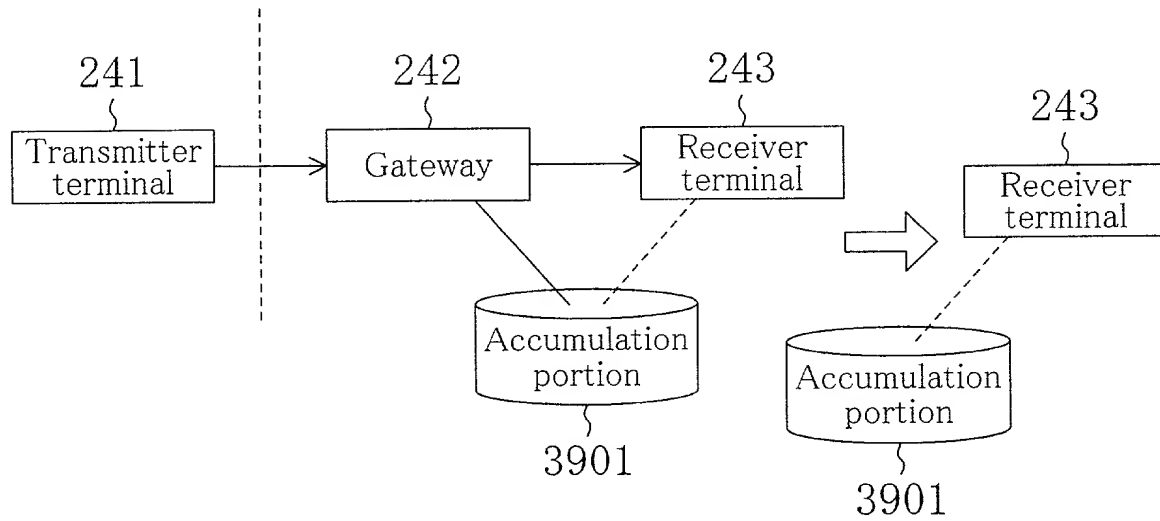


Fig. 40

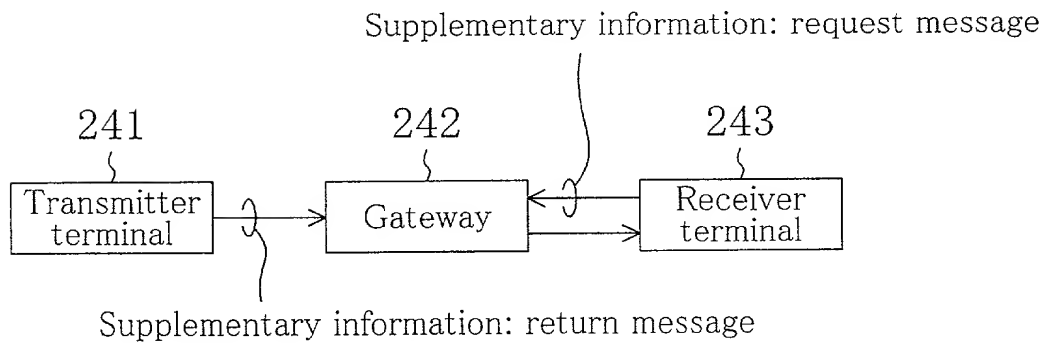

35/44

Fig. 41

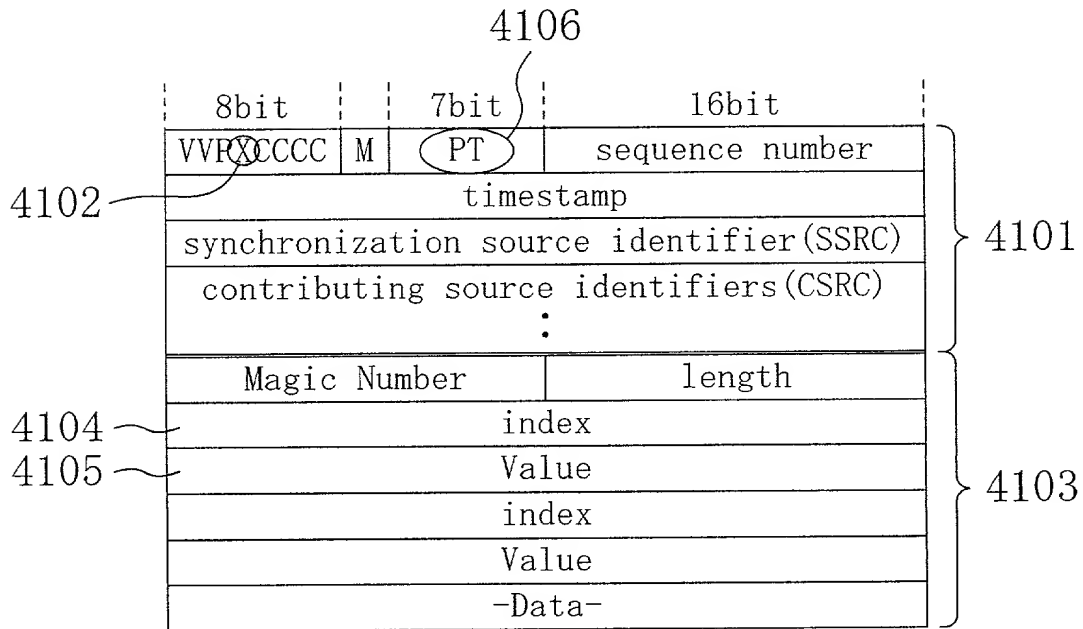



36/44

Fig. 42

index	Description	value
00000001	Size	Integer(byte)
00000002	Maximum total required time	Integer(second)
00000003	Required time per gate	Integer(second)
00000004	Communication rate	Integer(kilo bit/second)
00000005	:	:

Fig. 43

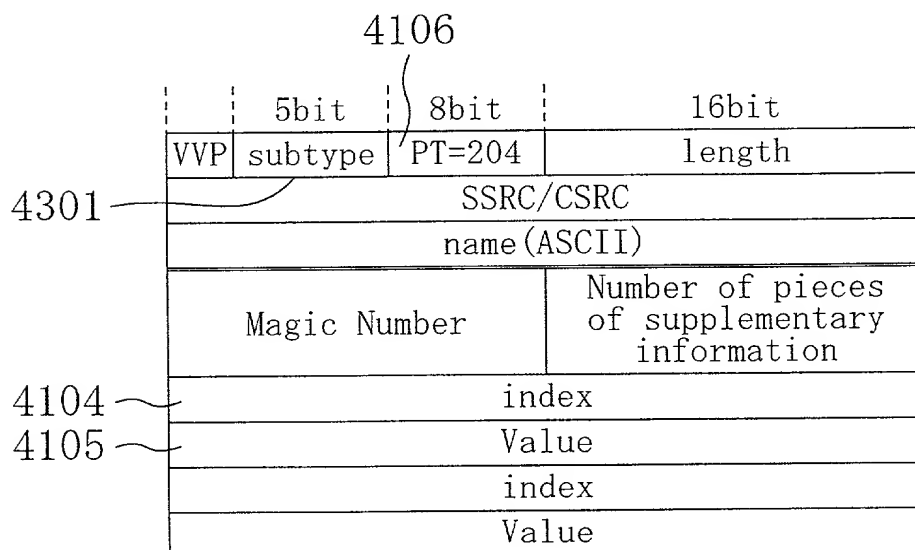
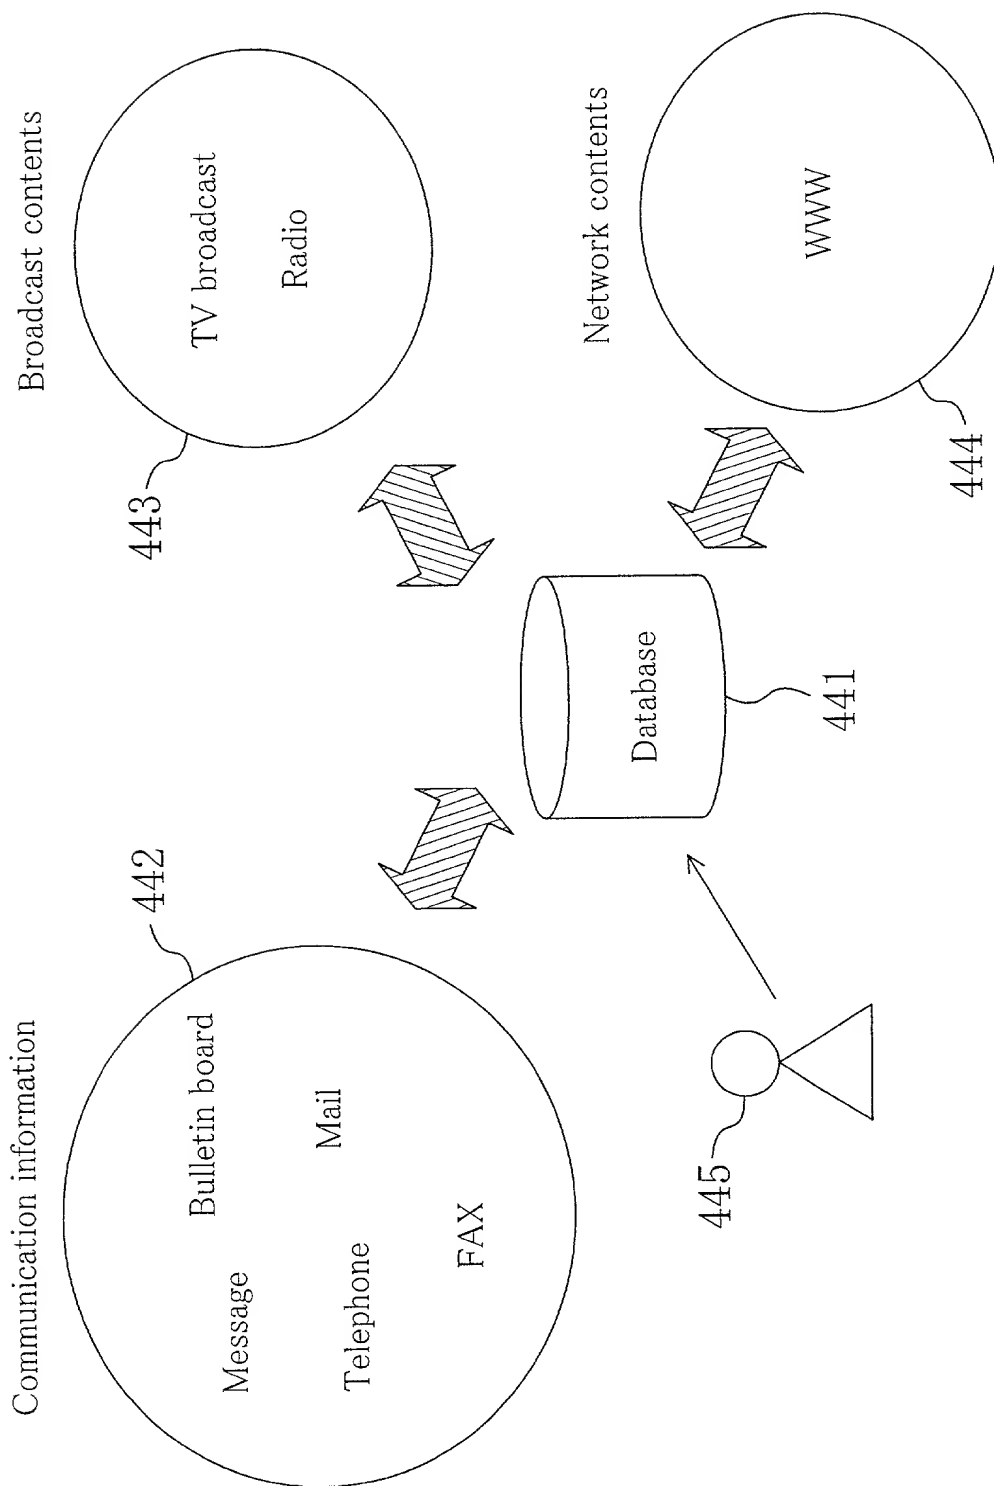


Fig. 44



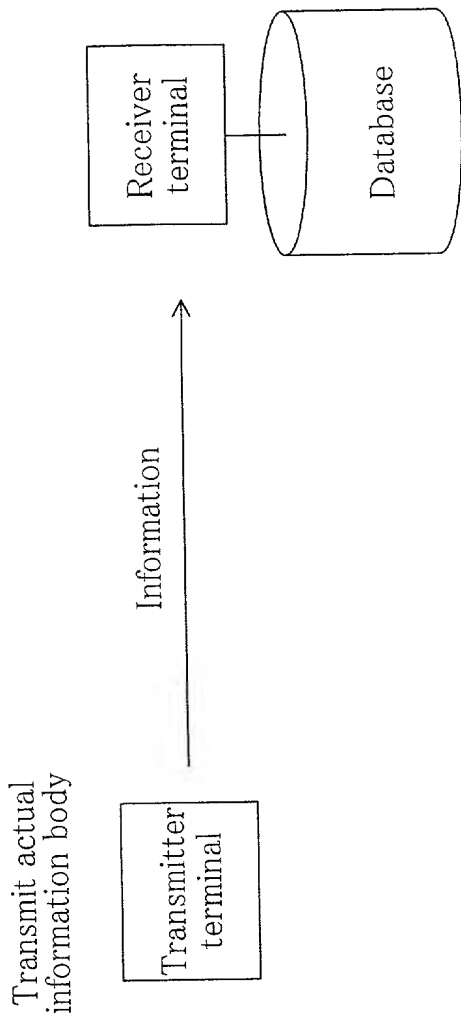


Fig. 45A

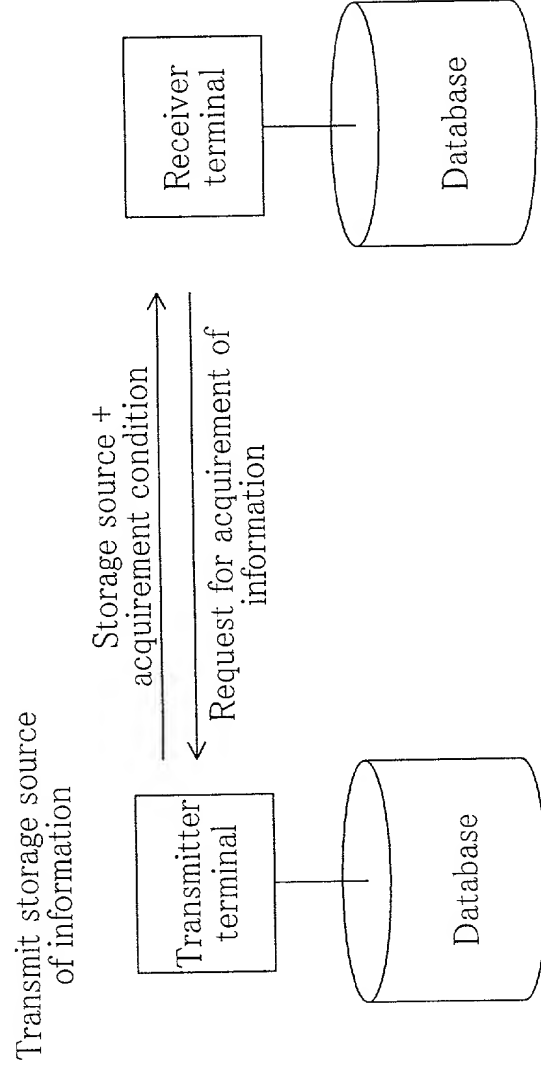


Fig. 45B

Transmit actual information body

Transmit storage source of information

Fig. 46

<p>Description method 1</p> <p><a href="ftp://fax.mei.co.jp/samp.doc">ftp://fax.mei.co.jp/samp.doc</a></p>	<p>Description method 7</p> <p>Cost &lt; 3000YEN</p> <p><a href="ftp://fax.mei.co.jp/samp.doc">ftp://fax.mei.co.jp/samp.doc</a></p>
<p>Description method 2</p> <p>Tel 0744-98-2500</p> <p>Or address</p> <p>Latitude and longitude</p>	<p>Description method 8</p> <p>Bandwidth=64kbps</p> <p>Time=30sec.</p> <p><a href="ftp://fax.mei.co.jp/samp.doc">ftp://fax.mei.co.jp/samp.doc</a></p>
<p>Description method 3</p> <p>Time limit=1 hour</p> <p>or</p> <p>Time zone=from am 0:00 to am 8:00</p> <p><a href="http://www.mei.co.jp/samp.doc">http://www.mei.co.jp/samp.doc</a></p>	<p>Description method 9</p> <p>Version=1.0, Priority=0</p> <p><a href="ftp://fax.mei.co.jp/samp.doc">ftp://fax.mei.co.jp/samp.doc</a></p> <p>Priority=1</p> <p><a href="ftp://fax.mei.co.jp/samp.doc">ftp://fax.mei.co.jp/samp.doc</a></p>
<p>Description method 4</p> <p>Bandwidth=64kbps</p> <p><a href="ftp://tel.mei.co.jp/samp.doc">ftp://tel.mei.co.jp/samp.doc</a></p>	<p>Description method 10</p> <p>Src Address=132.132.132.132</p> <p>Src port=1000</p> <p>Host name=test</p> <p><a href="ftp://fax.mei.co.jp/samp.doc">ftp://fax.mei.co.jp/samp.doc</a></p>
<p>Description method 5</p> <p>Disk space &gt; 3M, filesize &lt; 1Mbyte, image=JPEG</p> <p><a href="ftp://tel.mei.co.jp/samp.doc">ftp://tel.mei.co.jp/samp.doc</a></p>	<p>Description method 11</p> <p>Sensor=ON at 10:00am</p> <p>Image=samp.gif</p>
<p>Description method 6</p> <p>CPU load &lt; 50%</p> <p><a href="ftp://tel.mei.co.jp/samp.doc">ftp://tel.mei.co.jp/samp.doc</a></p>	

Fig. 47


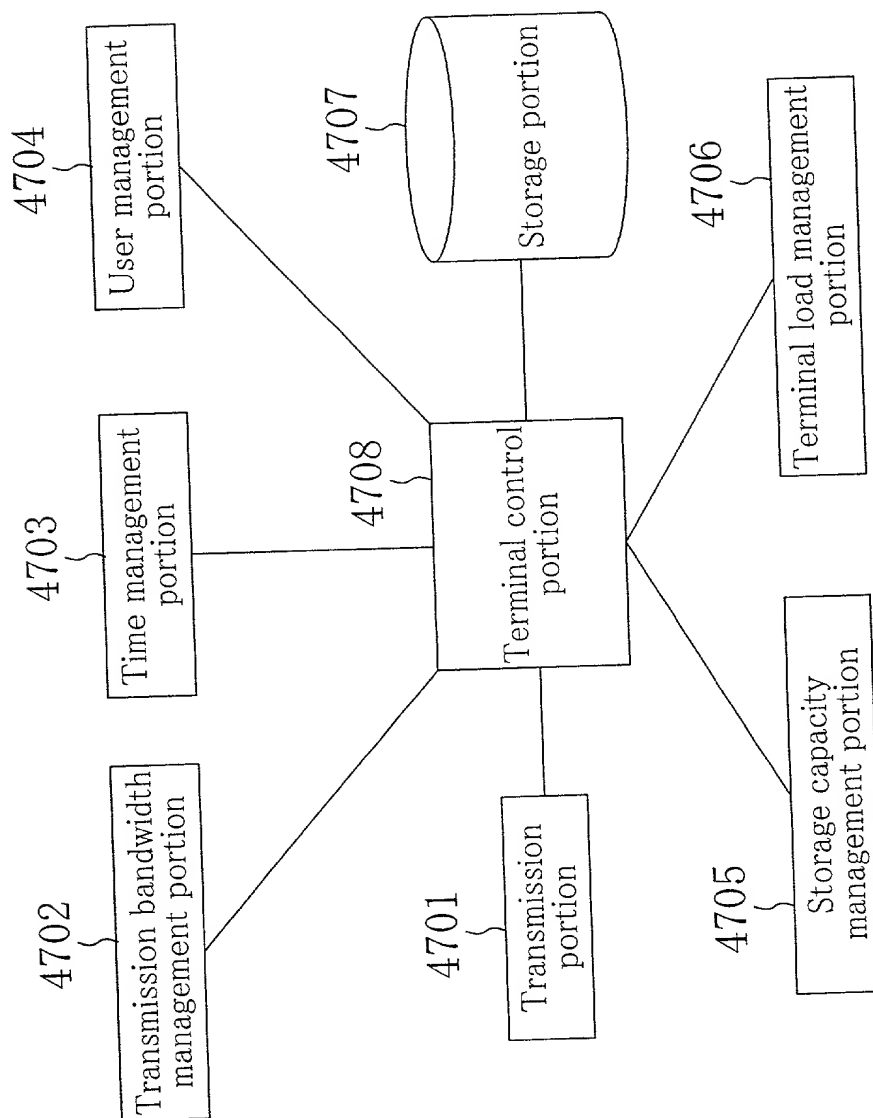


Fig. 48

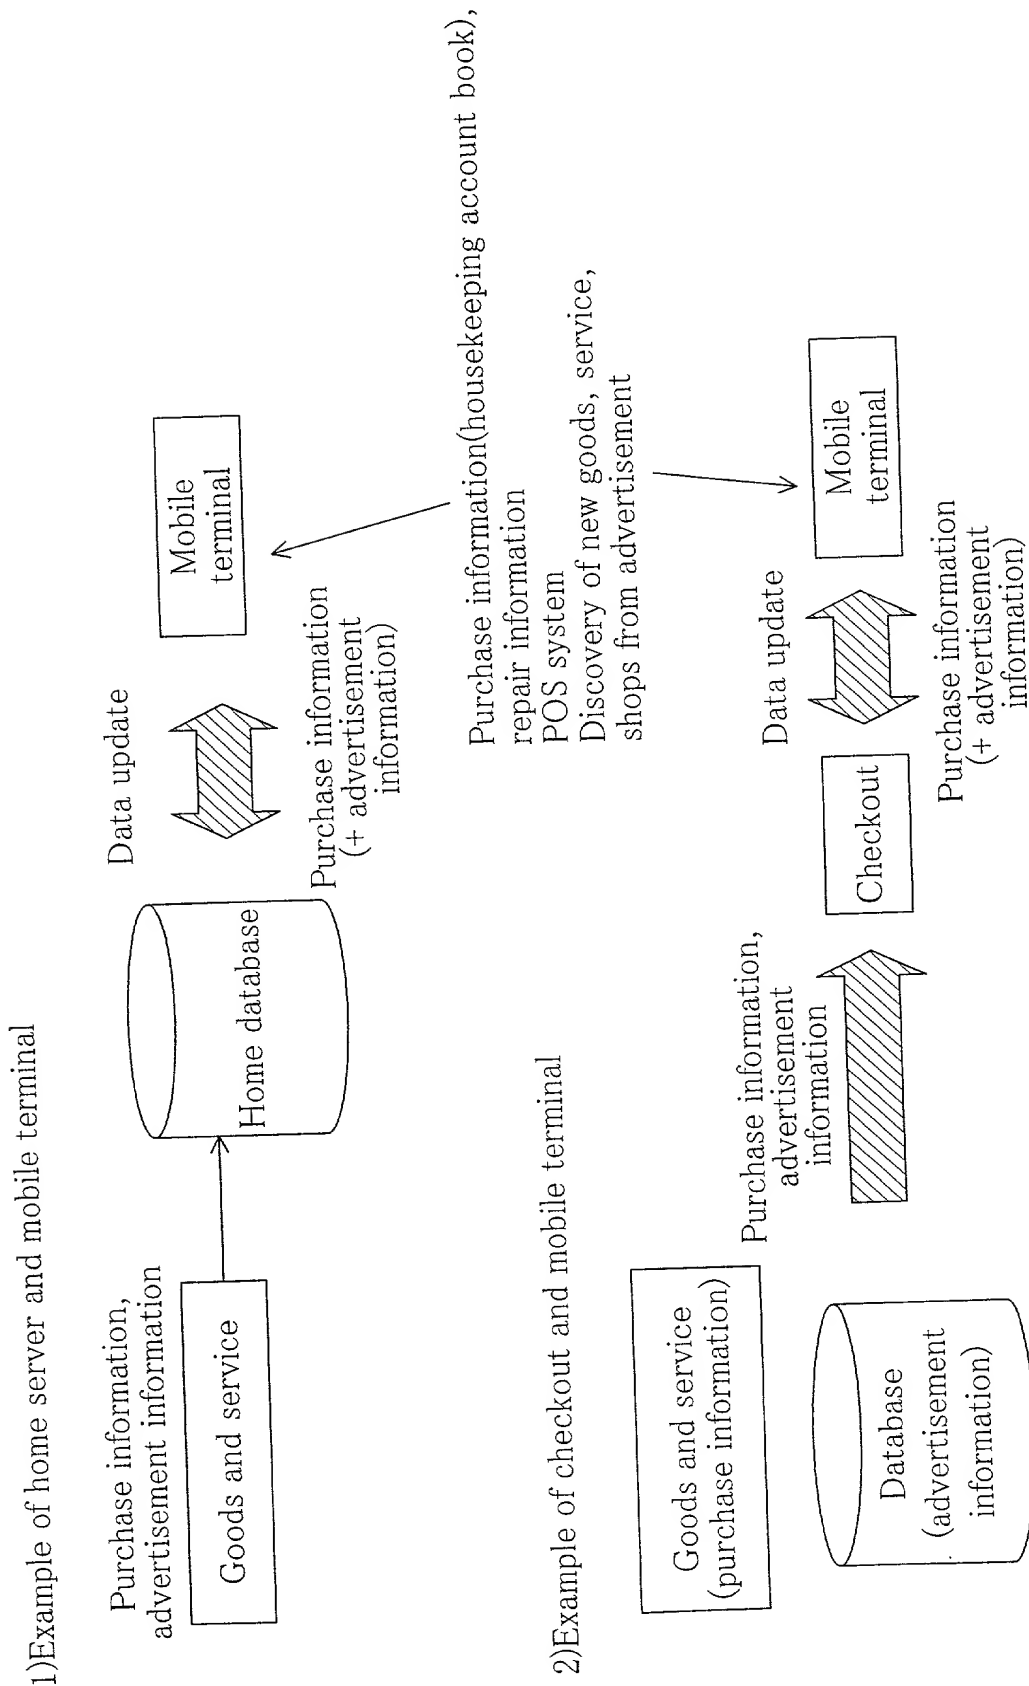

42/44

Fig. 49

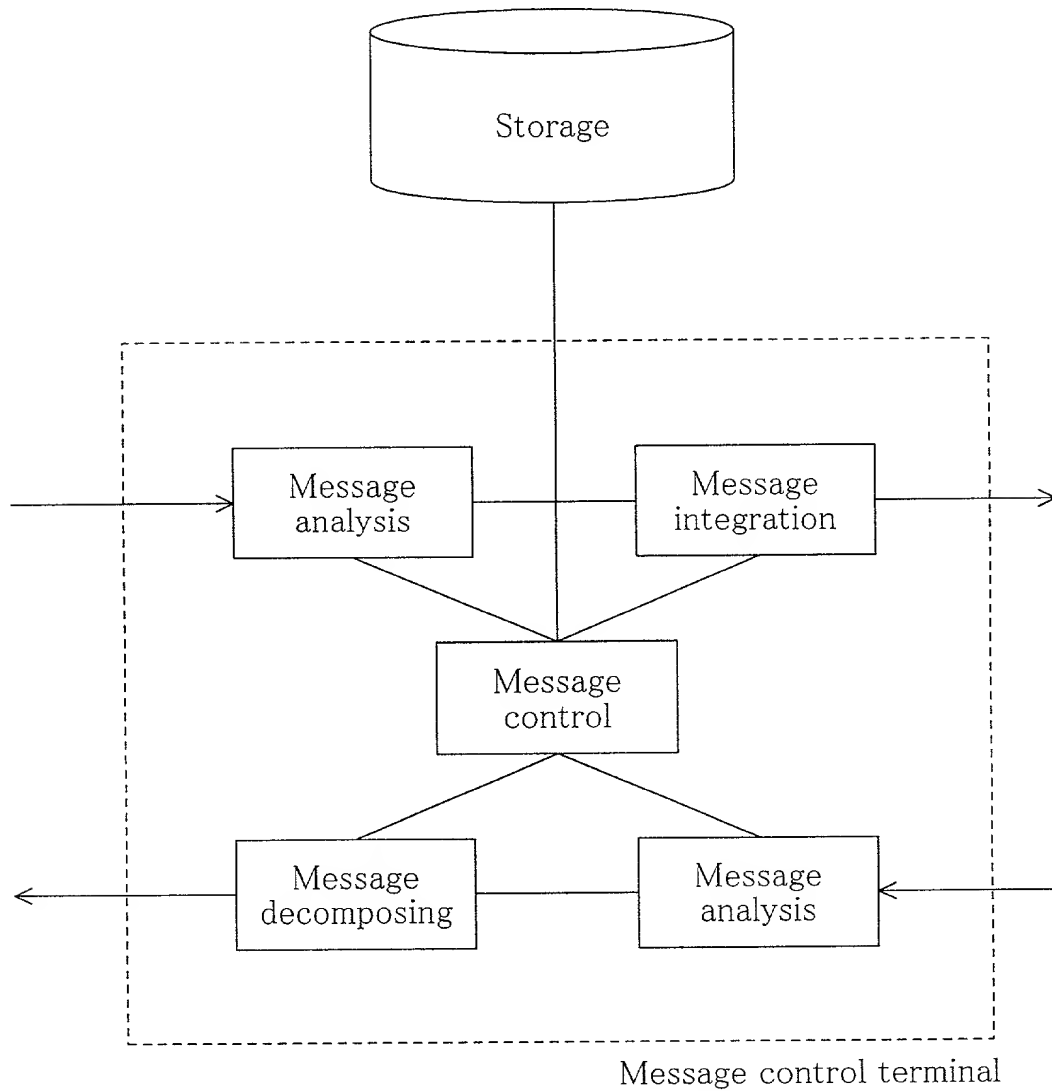


Fig. 50


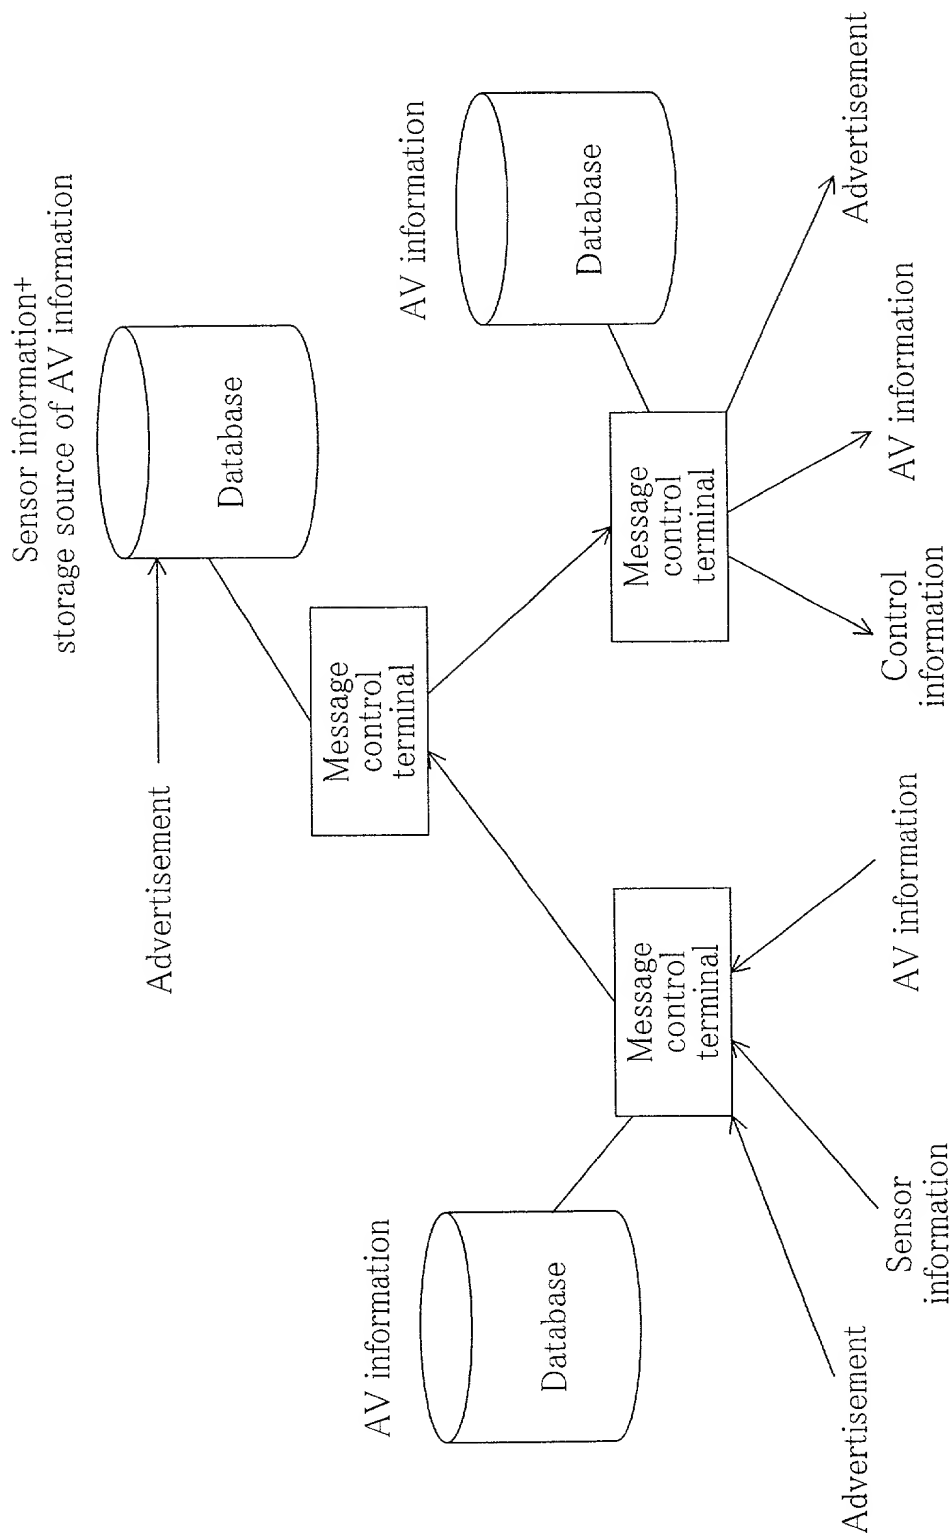




Fig. 51

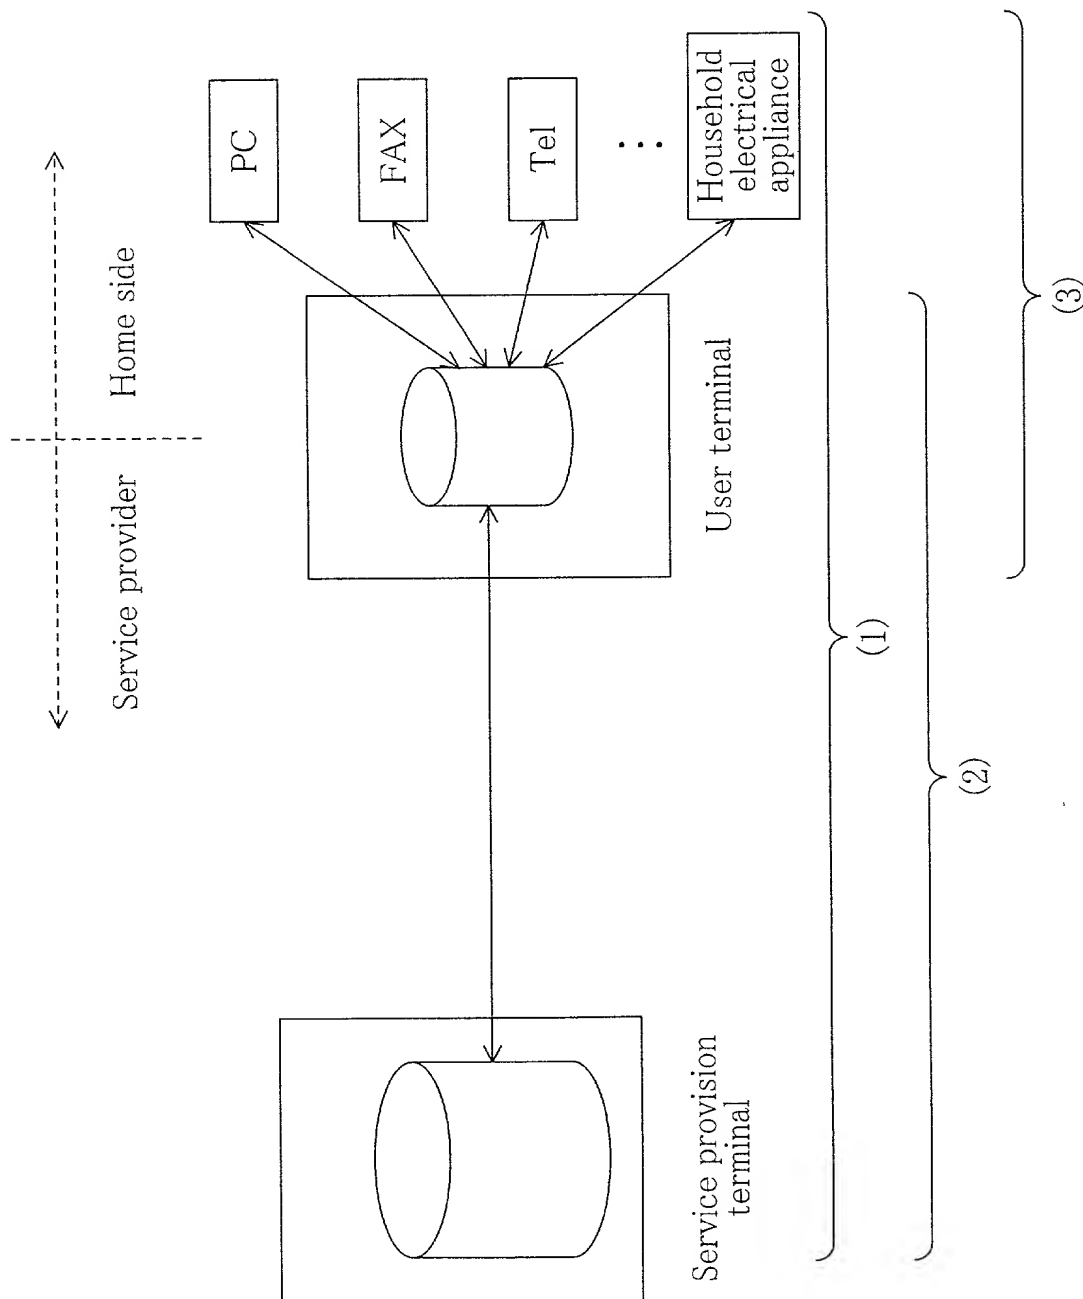

Attorney Docket No. 5077-000050**Declaration and Power of Attorney for Patent Application  
(English Language Declaration)**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**INFORMATION TRANSMISSION METHOD**

the specification of which (check one)

☐ is attached hereto.

☒ was filed on October 27, 2000 as United States Application No. or PCT International Application Number PCT/JP00/07609 and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a) - (d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

**Prior Foreign Application(s)****Priority Not Claimed**

<u>11-310552</u> (Number)	<u>Japan</u> (Country)	<u>01/11/1999</u> (Day/Month/Year filed)
<u>2000-116061</u> (Number)	<u>Japan</u> (Country)	<u>18/04/2000</u> (Day/Month/Year filed)
<u>2000-141497</u> (Number)	<u>Japan</u> (Country)	<u>15/05/2000</u> (Day/Month/Year filed)
<u>2000-274617</u> (Number)	<u>Japan</u> (Country)	<u>11/09/2000</u> (Day/Month/Year filed)

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

\_\_\_\_\_  
(Application Serial Number)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Application Serial Number)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Application Serial Number)

\_\_\_\_\_  
(Filing Date)

I hereby claim the benefit under 35 U.S.C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C.F.R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

Application Serial No.	Filing Date	Status – patented, pending, abandoned
_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

096964-0000

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Send Correspondence to:

Customer No. 27572  
Harness, Dickey & Pierce, P.L.C.



Direct Telephone Calls to: (name and telephone number)

Gregory A. Stobbs (248) 641-1600

Full name of sole or first inventor: Junichi SATO

Inventor's signature: Junichi Sato

Date: May 24, 2001

Residence: Nara, Japan

Citizenship: Japan

Post Office Address: 2-3-1, Sakyo, Nara-shi, Nara 631-0801, Japan

Full name of second joint inventor, if any: Takao YAMAGUCHI

Second Inventor's signature: Takao Yamaguchi

Date: May 24, 2001

Residence: Kyoto, Japan

Citizenship: Japan

Post Office Address: 4-7-10, Sakuragaoka, Seika-cho, Soraku-gun, Kyoto 619-0237, Japan

0969664-06301

Full name of third joint inventor, if any: 3-10 Tomoaki ITOH

Third Inventor's signature: Tomoaki ITOH

Date: May 24, 2001

Residence: Osaka, Japan SPX

Citizenship: Japan

Post Office Address: 46-2-405, Yamadaike-higashimachi, Hirakata-shi, Osaka 573-0165, Japan

Full name of fourth joint inventor, if any: 4-10 Hiroshi ARAKAWA

Fourth Inventor's signature: Hiroshi ARAKAWA

Date: May 24, 2001

Residence: Kyoto, Japan SPX

Citizenship: Japan

Post Office Address: 14-8-6-1-1404, Mukojima-yotsudaniike, Fushimi-ku, Kyoto-shi, Kyoto 612-8136, Japan

Full name of fifth joint inventor, if any: \_\_\_\_\_

Fifth Inventor's signature: \_\_\_\_\_

Date: \_\_\_\_\_

Residence: \_\_\_\_\_

Citizenship: \_\_\_\_\_

Post Office Address: \_\_\_\_\_

0956964-063601